SIEMENS

Data sheet

3RA2110-1GH15-1BB4



Load feeder fuseless, Direct-on-line starting 400 V AC, Size S00 4.50...6.30 A 24 V DC Spring-type terminal for 60 mm busbar systems Type of coordination 1, lq = 150 kA 1 NO (contactor)

il j	
product brand name	SIRIUS
product designation	Direct (on-line) starter
design of the product	for 60 mm busbars
product type designation	3RA21
manufacturer's article number	
 of the supplied contactor 	<u>3RT2015-2BB41</u>
 of the supplied circuit-breakers 	<u>3RV2011-1GA20</u>
 of the supplied busbar adapter 	8US1251-5DT11
 of the supplied link module 	<u>3RA2911-2AA00</u>
General technical data	
size of the circuit-breaker	S00
size of load feeder	S00
power loss [W] for rated value of the current	
 at AC in hot operating state per pole 	2.6 W
 without load current share typical 	4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
degree of protection NEMA rating	other
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (operating cycles) of contactor typical	30 000 000
type of assignment	1
reference code according to IEC 81346-2:2019	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1
Weight	1.24 kg
Ambient conditions	
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
temperature compensation	-20 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current- dependent overload release	4.5 6.3 A
operating voltage	
• rated value	690 V
 at AC-3 rated value maximum 	690 V

 at AC-3e rated value maximum 	690 V		
• at AC-se fated value maximum operating frequency rated value	590 V 50 60 Hz		
operational current	50 00 112		
at AC-3 at 400 V rated value	6.3 A		
• at AC-3e at 400 V rated value	6.3 A		
operating power	0.077		
• at AC-3			
— at 400 V rated value	2 200 W		
• at AC-3e			
— at 400 V rated value	2 200 W		
Control circuit/ Control			
type of voltage of the control supply voltage	DC		
control supply voltage at DC rated value	24 V		
holding power of magnet coil at DC	4 W		
Auxiliary circuit			
product extension auxiliary switch	Yes		
Protective and monitoring functions			
trip class	CLASS 10		
design of the overload release	thermal (bimetallic)		
response value current of instantaneous short-circuit trip unit	82 A		
UL/CSA ratings			
full-load current (FLA) for 3-phase AC motor			
at 480 V rated value	4.8 A		
at 600 V rated value	6.1 A		
yielded mechanical performance [hp]			
• for single-phase AC motor			
— at 110/120 V rated value	0.25 hp		
— at 230 V rated value	0.75 hp		
• for 3-phase AC motor			
— at 200/208 V rated value	1.5 hp		
— at 220/230 V rated value	2 hp		
— at 460/480 V rated value	3 hp		
— at 575/600 V rated value	5 hp		
Short-circuit protection			
product function short circuit protection	Yes		
product function short circuit protection design of the short-circuit trip	Yes		
design of the short-circuit trip	Yes magnetic		
design of the short-circuit trip conditional short-circuit current (Iq)	magnetic		
design of the short-circuit trip conditional short-circuit current (Iq) • at 400 V according to IEC 60947-4-1 rated value			
design of the short-circuit trip conditional short-circuit current (Iq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions	magnetic 150 000 A		
design of the short-circuit trip conditional short-circuit current (Iq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position	magnetic 150 000 A vertical		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method	magnetic 150 000 A		
design of the short-circuit trip conditional short-circuit current (Iq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems		
design of the short-circuit trip conditional short-circuit current (Iq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm		
design of the short-circuit trip conditional short-circuit current (Iq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm 0 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm 0 mm 50 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards — upwards — at the side	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm 0 mm 50 mm 20 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards — upwards — at the side — downwards	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm 0 mm 50 mm 20 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm 0 mm 50 mm 20 mm 10 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm 0 mm 50 mm 20 mm 10 mm 20 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — at the side — downwards • for live parts — forwards — backwards — backwards — backwards — backwards — backwards — backwards	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm 0 mm 50 mm 20 mm 10 mm 20 mm 10 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards • for live parts — forwards • for live parts — forwards • upwards • for live parts — upwards • upwards • for live parts — upwards • upwards	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm 0 mm 50 mm 20 mm 10 mm 20 mm 10 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards • for live parts — forwards — downwards • for live parts — forwards — upwards — downwards — backwards — downwards — lowards — downwards — downwards — lowards <	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm 0 mm 50 mm 20 mm 10 mm 50 mm 10 mm 50 mm 10 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/mounting/dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — at the side — downwards — backwards — upwards — at the side — downwards — at the side — downwards — at the side	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm 0 mm 50 mm 20 mm 10 mm 50 mm 10 mm 50 mm 10 mm		
design of the short-circuit trip conditional short-circuit current (lq) • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — forwards — backwards — upwards — at the side — downwards — backwards — upwards — at the side — downwards — backwards — upwards — at the side — downwards — at the side	magnetic 150 000 A vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm 20 mm 0 mm 50 mm 20 mm 10 mm 50 mm 10 mm 50 mm 10 mm		

for auxiliary and control circuit Safety related data product function suitable for safety function Electrical Safety touch protection on the front according to IEC 60529 Communication/ Protocol protocol is supported	spring-loaded terminals Yes finger-safe, for vertical conta	act from the front				
product function suitable for safety function Electrical Safety touch protection on the front according to IEC 60529 Communication/ Protocol protocol is supported	finger-safe, for vertical cont	act from the front				
Electrical Safety touch protection on the front according to IEC 60529 Communication/ Protocol protocol is supported	finger-safe, for vertical cont	act from the front				
touch protection on the front according to IEC 60529 Communication/ Protocol protocol is supported		act from the front				
Communication/ Protocol protocol is supported						
protocol is supported	No					
	No					
PROFINET IO protocol	110					
PROFINET IO protocol PROFIsafe protocol	No					
protocol is supported AS-Interface protocol	No					
Approvals Certificates	110					
General Product Approval			For use in hazard- ous locations			
Confirmation UK CE CA EG-Konf.		EAC	K ATEX			
Test Certificates Marine / Shipp	ing					
Special Test Certific- ate Type Test Certific- ates/Test Report	BUREAU VERITAS		Lloyd's Register urs			
Marine / Shipping	other	Railway	Dangerous goods			
PRS RINA RMRS	Confirmation	<u>Special Test Certific-</u> <u>ate</u>	Transport Information			
Environment						
Environmental Con- firmations						
Further information Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10						

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2110-1GH15-1BB4

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2110-1GH15-1BB4

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-1GH15-1BB4


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2110-1GH15-1BB4&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-1GH15-1BB4/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2110-1GH15-1BB4&objecttype=14&gridview=view1



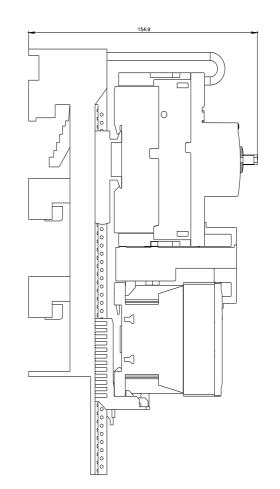



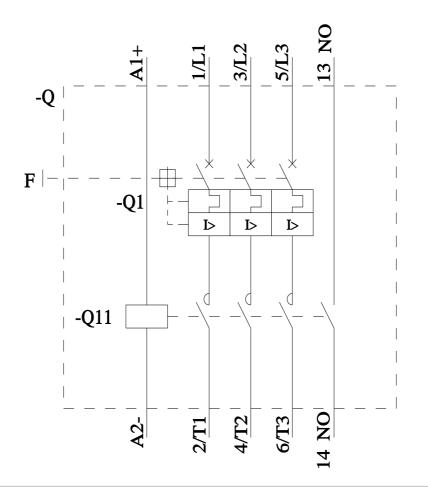

last modified:

6/4/2024 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RA21101GH151BB4