



Load feeder fuseless, Direct-on-line starting 400 V AC, Size S00 7.00...10.0 A 230 V AC Spring-type terminal for installation on standard mounting rail Type of coordination 1, I<sub>q</sub> = 150 kA 1 NO (contactor)

|   |                                |
|---|--------------------------------|
| product brand name  | SIRIUS                         |
| product designation   | Direct (on-line) starter       |
| design of the product   | for DIN-rail or screw mounting |
| product type designation  | 3RA21                          |
| manufacturer's article number   |                                |
| • of the supplied contactor   | <a href="#">3RT2016-2AP01</a>  |
| • of the supplied circuit-breakers  | <a href="#">3RV2011-1JA20</a>  |
| • of the supplied link module   | <a href="#">3RA2911-2AA00</a>  |
| <b>General technical data</b>   |                                |
| size of the circuit-breaker   | S00                            |
| size of load feeder   | S00                            |
| power loss [W] for rated value of the current                                       |                                |
| • at AC in hot operating state per pole   | 3.4 W                          |
| • without load current share typical  | 4.2 W                          |
| insulation voltage with degree of pollution 3 at AC rated value                     | 690 V                          |
| surge voltage resistance rated value  | 6 kV                           |
| degree of protection NEMA rating  | other                          |
| shock resistance according to IEC 60068-2-27  | 6g / 11 ms                     |
| mechanical service life (operating cycles) of contactor typical                     | 30 000 000                     |
| type of assignment  | 1                              |
| reference code according to IEC 81346-2:2019  | Q                              |
| Substance Prohibitance (Date)   | 10/01/2009                     |
| SVHC substance name   | Lead - 7439-92-1               |
| Weight  | 0.698 kg                       |
| <b>Ambient conditions</b>   |                                |
| ambient temperature   |                                |
| • during operation  | -20 ... +60 °C                 |
| • during storage  | -50 ... +80 °C                 |
| • during transport  | -50 ... +80 °C                 |
| temperature compensation  | -20 ... +60 °C                 |
| relative humidity during operation  | 10 ... 95 %                    |
| <b>Main circuit</b>   |                                |
| number of poles for main current circuit  | 3                              |
| design of the switching contact   | electromechanical              |
| adjustable current response value current of the current-dependent overload release | 7 ... 10 A                     |
| operating voltage   |                                |
| • rated value   | 690 V                          |
| • at AC-3 rated value maximum   | 690 V                          |
| • at AC-3e rated value maximum  | 690 V                          |

|  |  |
|--|--|
| <b>operating frequency rated value</b>                                 | 50 ... 60 Hz                                   |
| <b>operational current</b>   |  |
| • at AC-3 at 400 V rated value   | 9 A  |
| • at AC-3e at 400 V rated value  | 9 A  |
| <b>operating power</b>   |  |
| • at AC-3  |  |
| — at 400 V rated value   | 4 000 W  |
| • at AC-3e   |  |
| — at 400 V rated value   | 4 000 W  |
| <b>Control circuit/ Control</b>  |  |
| <b>type of voltage of the control supply voltage</b>                   | AC   |
| <b>control supply voltage at AC</b>                                    |  |
| • at 50 Hz rated value   | 230 V  |
| • at 60 Hz rated value   | 230 V  |
| <b>apparent holding power of magnet coil at AC</b>                     | 4.2 VA   |
| • at 50 Hz   | 4.2 VA   |
| • at 60 Hz   | 3.3 VA   |
| <b>inductive power factor with the holding power of the coil</b>       | 0.25   |
| • at 50 Hz   | 0.25   |
| • at 60 Hz   | 0.25   |
| <b>Auxiliary circuit</b>   |  |
| <b>product extension auxiliary switch</b>                              | Yes  |
| <b>Protective and monitoring functions</b>                             |  |
| <b>trip class</b>  | CLASS 10                                       |
| <b>design of the overload release</b>                                  | thermal (bimetallic)                           |
| <b>response value current of instantaneous short-circuit trip unit</b> | 130 A  |
| <b>UL/CSA ratings</b>  |  |
| <b>full-load current (FLA) for 3-phase AC motor</b>                    |  |
| • at 480 V rated value   | 7.6 A  |
| • at 600 V rated value   | 7.6 A  |
| <b>yielded mechanical performance [hp]</b>                             |  |
| • for single-phase AC motor  |  |
| — at 110/120 V rated value   | 0.33 hp  |
| — at 230 V rated value   | 1 hp   |
| • for 3-phase AC motor   |  |
| — at 200/208 V rated value   | 2 hp   |
| — at 220/230 V rated value   | 3 hp   |
| — at 460/480 V rated value   | 5 hp   |
| — at 575/600 V rated value   | 7.5 hp   |
| <b>Short-circuit protection</b>  |  |
| <b>product function short circuit protection</b>                       | Yes  |
| <b>design of the short-circuit trip</b>                                | magnetic                                       |
| <b>conditional short-circuit current (I<sub>q</sub>)</b>               |  |
| • at 400 V according to IEC 60947-4-1 rated value                      | 150 000 A                                      |
| <b>Installation/ mounting/ dimensions</b>                              |  |
| <b>mounting position</b>   | vertical                                       |
| <b>fastening method</b>  | screw and snap-on mounting onto 35 mm DIN rail |
| <b>height</b>  | 198 mm   |
| <b>width</b>   | 45 mm  |
| <b>depth</b>   | 97 mm  |
| <b>required spacing</b>  |  |
| • for grounded parts   |  |
| — forwards   | 20 mm  |
| — backwards  | 0 mm   |
| — upwards  | 50 mm  |
| — at the side  | 20 mm  |
| — downwards  | 10 mm  |
| • for live parts   |  |
| — forwards   | 20 mm  |
| — backwards  | 0 mm   |

|               |       |
|---------------|-------|
| — upwards     | 50 mm |
| — downwards   | 10 mm |
| — at the side | 20 mm |

#### Connections/ Terminals

##### type of electrical connection

|                                     |                         |
|-------------------------------------|-------------------------|
| • for main current circuit          | spring-loaded terminals |
| • for auxiliary and control circuit | spring-loaded terminals |

#### Safety related data

|   |     |
|---|-----|
| product function suitable for safety function | Yes |
|---|-----|

##### Electrical Safety

|  |  |
|--|--|
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
|--|--|


#### Communication/ Protocol

##### protocol is supported



|                        |    |
|------------------------|----|
| • PROFINET IO protocol | No |
| • PROFIsafe protocol   | No |

|   |    |
|---|----|
| protocol is supported AS-Interface protocol | No |
|---|----|

#### Approvals Certificates

| General Product Approval  |   |   |   | For use in hazardous locations  | Test Certificates                                  |
|---|---|---|---|---|--|
| <br>EG-Konf. |  | <br>UL |  | <br>ATEX | <a href="#">Type Test Certificates/Test Report</a> |

| Test Certificates                        | Marine / Shipping   |
|--|---|
| <a href="#">Special Test Certificate</a> | <br>ABS <br>BUREAU VERITAS <br>DNV <br>LRS <br>PRS |

| Marine / Shipping   | other                        | Railway                                  | Environment                                 |
|---|------------------------------|--|---|
| <br>RINA <br>RMRS | <a href="#">Confirmation</a> | <a href="#">Special Test Certificate</a> | <a href="#">Environmental Confirmations</a> |

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2110-1JE16-1AP0>

##### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2110-1JE16-1AP0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-1JE16-1AP0>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA2110-1JE16-1AP0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2110-1JE16-1AP0&lang=en)


##### Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-1JE16-1AP0/char>

##### Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2110-1JE16-1AP0&objecttype=14&gridview=view1>

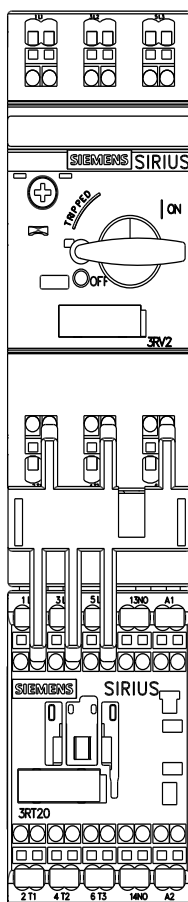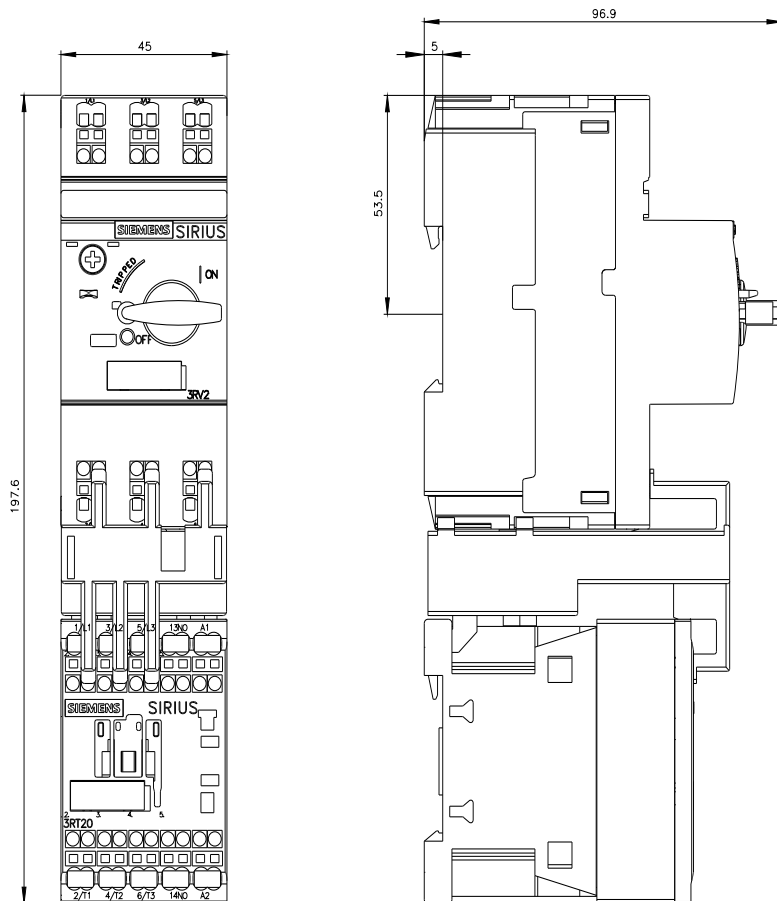

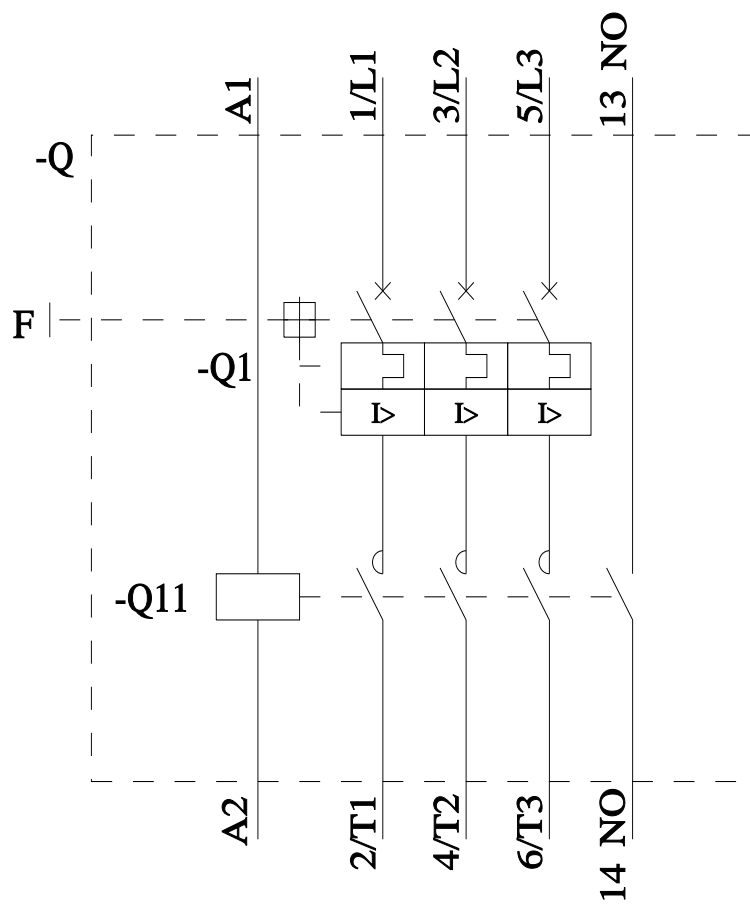

last modified:

4/1/2025 

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Siemens:](#)

[3RA21101JE161AP0](#)