## **SIEMENS**

### **Data sheet**

### 3RA2210-0HE15-2BB4



Load feeder fuseless, Reversing duty 400 V AC, Size S00 0.55...0.80 A 24 V DC Spring-type terminal for installation on standard mounting rail (also fulfills type of coordination 1) Type of coordination 2, Iq = 150 kA 1 NC (contactor)

product brand name	SIRIUS
product designation	Reversing starter
design of the product	for standard rail or screw mounting
product type designation	3RA22
manufacturer's article number	
of the supplied contactor	3RT2015-2BB42
of the supplied circuit-breakers	3RV2011-0HA20
of the supplied link module	3RA2911-2AA00
<ul> <li>of the supplied wiring kit</li> </ul>	3RA2913-2AA2
General technical data	
size of the circuit-breaker	S00
size of load feeder	S00
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.6 W
<ul> <li>without load current share typical</li> </ul>	4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
degree of protection NEMA rating	other
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (operating cycles) of contactor typical	30 000 000
type of assignment	2
reference code according to IEC 81346-2:2019	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1
Weight	1.059 kg
Ambient conditions	
ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
temperature compensation	-20 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current- dependent overload release	0.55 0.8 A
operating voltage	
rated value	690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V

at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current	
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	0.8 A
at AC-3e at 400 V rated value	0.8 A
operating power	
• at AC-3	
— at 400 V rated value	180 W
• at AC-3e	
— at 400 V rated value	180 W
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	24 V
holding power of magnet coil at DC	4 W
Auxiliary circuit	
product extension auxiliary switch	Yes
	165
Protective and monitoring functions	01.400.40
trip class	CLASS 10
design of the overload release	thermal (bimetallic)
response value current of instantaneous short-circuit trip unit	10 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	0.8 A
at 600 V rated value	0.8 A
yielded mechanical performance [hp]	
• for 3-phase AC motor	
— at 460/480 V rated value	0.5 hp
— at 575/600 V rated value	0.5 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
conditional short-circuit current (Iq)	
at 400 V according to IEC 60947-4-1 rated value	150 000 A
Installation/ mounting/ dimensions	
mounting position	vertical
fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	Sciew and shap-on mounting onto 35 min bit rail
	204 mm
	204 mm
width	90 mm
width depth	
width depth required spacing	90 mm
width depth required spacing • for grounded parts	90 mm 97 mm
width depth required spacing • for grounded parts — forwards	90 mm 97 mm 32 mm
width depth required spacing  • for grounded parts — forwards — backwards	90 mm 97 mm 32 mm 0 mm
width depth required spacing  • for grounded parts — forwards — backwards — upwards	90 mm 97 mm 32 mm 0 mm 50 mm
width depth required spacing  • for grounded parts — forwards — backwards — upwards — at the side	90 mm 97 mm 32 mm 0 mm 50 mm 10 mm
width depth required spacing  • for grounded parts — forwards — backwards — upwards — at the side — downwards	90 mm 97 mm 32 mm 0 mm 50 mm
width depth required spacing  • for grounded parts — forwards — backwards — upwards — at the side	90 mm 97 mm 32 mm 0 mm 50 mm 10 mm
width depth required spacing  • for grounded parts — forwards — backwards — upwards — at the side — downwards	90 mm 97 mm 32 mm 0 mm 50 mm 10 mm
width depth required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts	90 mm 97 mm 32 mm 0 mm 50 mm 10 mm
width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards	90 mm 97 mm 32 mm 0 mm 50 mm 10 mm 10 mm
width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards	90 mm 97 mm 32 mm 0 mm 50 mm 10 mm 10 mm 0 mm
width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  — upwards	90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 0 mm
width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  — downwards  — downwards  — downwards  — downwards  — downwards	90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 0 mm 50 mm
width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  — backwards  — upwards  — townwards  — at the side  Connections/ Terminals	90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 0 mm
width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  — at the side  Connections/ Terminals  type of electrical connection	90 mm 97 mm  32 mm 0 mm 50 mm 10 mm
width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  — upwards  — to one of the side  — downwards  — to one of the side  Connections/ Terminals  type of electrical connection  • for main current circuit	90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 0 mm 50 mm 10 mm 50 mm 10 mm 50 mm 10 mm
width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  — backwards  — upwards  — to downwards  — to downwards  — at the side  Connections/ Terminals  type of electrical connection  • for main current circuit  • for auxiliary and control circuit	90 mm 97 mm  32 mm 0 mm 50 mm 10 mm
width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  — upwards  — downwards  — to downwards  — at the side  Connections/ Terminals  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  Safety related data	90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 10 mm  32 mm 0 mm 50 mm 10 mm 50 mm 50 mm 10 mm 50 mm
width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  — upwards  — downwards  — at the side  Connections/ Terminals  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  Safety related data  product function suitable for safety function	90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 0 mm 50 mm 10 mm 50 mm 10 mm 50 mm 10 mm
width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  — upwards  — downwards  — at the side  Connections/ Terminals  type of electrical connection  • for auxiliary and control circuit  Safety related data	90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 32 mm 0 mm 50 mm 10 mm 50 mm 50 mm 10 mm spring-loaded terminals spring-loaded terminals

# protocol is supported PROFINET IO protocol PROFIsafe protocol protocol is supported AS-Interface protocol No

**Approvals Certificates** 

**General Product Approval** 

For use in hazardous locations





Confirmation







**Test Certificates** 

Marine / Shipping

Type Test Certificates/Test Report

Special Test Certificate





Confirmation





Marine / Shipping





other Railway

Special Test Certificate

<u>Transport Information</u>

**Dangerous goods** 

Environment

Environmental Confirmations

#### Further informatior

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

 $\underline{\text{https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2210-0HE15-2BB4}$ 

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RA2210-0HE15-2BB4}$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2210-0HE15-2BB4

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


 $\underline{\text{http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2210-0HE15-2BB4\&lang=ender.pdf}}$ 


Characteristic: Tripping characteristics,  $I^2t$ , Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2210-0HE15-2BB4/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2210-0HE15-2BB4&objecttype=14&gridview=view1

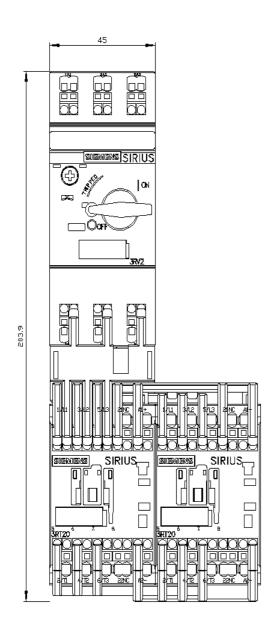

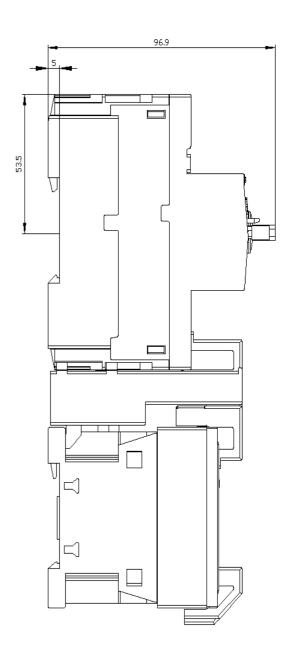

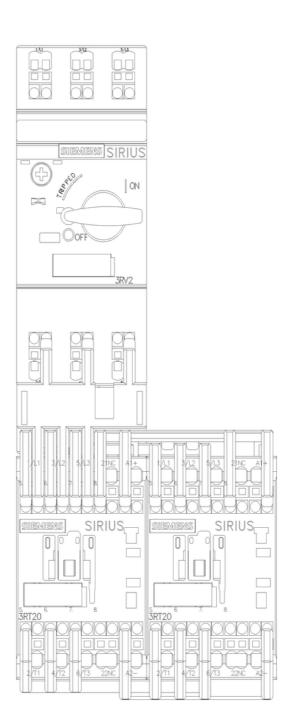

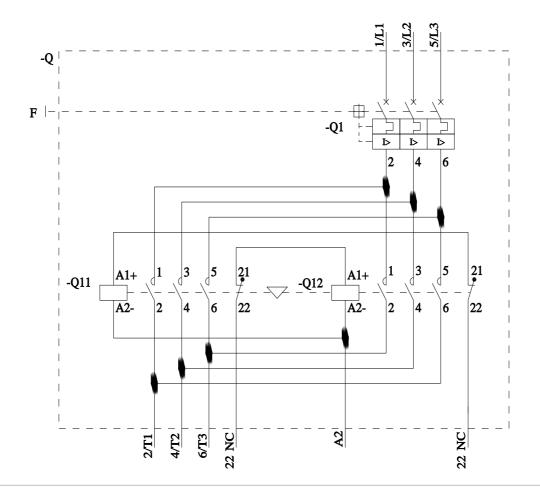

last modified: 6/5/2024 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Siemens:

3RA22100HE152BB4