# SIEMENS

### Data sheet

## 3RA2220-0HD23-0AK6



Fuseless motor starter Reversing operation 600VAC Size S0 0.55-0.8A 110/120VAC 50/60HZ screw connection For snapping onto 60 mm busbar systems Type of coordination 2 IQ = 150 KA Also full fills type Of coordination 1 1NO+1NC (per contactor)

product brand name	SIRIUS
product designation	non-fused motor starter 3RA2
design of the product	reversing starter
manufacturer's article number	
<ul> <li>of the supplied contactor</li> </ul>	<u>3RT2023-1AK60</u>
<ul> <li>of the supplied circuit-breakers</li> </ul>	<u>3RV2011-0HA10</u>
<ul> <li>of the supplied RS assembly kit</li> </ul>	<u>3RA2923-1DB1</u>
<ul> <li>of the supplied busbar adapter</li> </ul>	8US1251-5NT10
<ul> <li>of the supplied link module</li> </ul>	<u>3RA2921-1AA00</u>
General technical data	
size of the circuit-breaker	S00
size of load feeder	SO
product extension auxiliary switch	Yes
insulation voltage with degree of pollution 3 at AC rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (operating cycles) of contactor typical	10 000 000
type of assignment	2
Substance Prohibitance (Date)	03/01/2017
SVHC substance name	Lead - 7439-92-1
Weight	1.73 kg
Ambient conditions	
ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
during storage	-50 +80 °C
during transport	-55 +80 °C
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current- dependent overload release	0.55 0.8 A
operating voltage	
rated value	690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
operating frequency rated value	50 60 Hz
operational current at AC-3 at 400 V rated value	0.6 A
operating power at AC-3	
<ul> <li>at 400 V rated value</li> </ul>	180 W
● at 500 V rated value	250 W

• at 690 V rated value	370 W
Control circuit/ Control	
control supply voltage at AC	
• at 50 Hz rated value	110 V
at 50 Hz rated value	88 121 V
at 60 Hz rated value	120 V
at 60 Hz rated value	96 132 V
	90 132 V 7.2 VA
apparent holding power of magnet coil at AC	
inductive power factor with the holding power of the coil	0.28
Auxiliary circuit	2
number of NC contacts for auxiliary contacts	2
number of NO contacts for auxiliary contacts	2
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal (bimetallic)
response value current of instantaneous short-circuit trip unit	10.4 A
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
conditional short-circuit current (lq)	
• at 400 V according to IEC 60947-4-1 rated value	153 000 A
Installation/ mounting/ dimensions	
mounting position	vertical
fastening method	for snapping onto 60 mm busbar systems
height	260 mm
width	90 mm
depth	155 mm
required spacing	
<ul> <li>for grounded parts</li> </ul>	
— forwards	10 mm
— backwards	0 mm
— upwards	30 mm
— at the side	9 mm
— downwards	10 mm
for live parts	
— forwards	10 mm
— backwards	0 mm
— upwards	30 mm
— downwards	10 mm
— at the side	9 mm
Connections/ Terminals	5 mm
	acrow two terminals
type of electrical connection for main current circuit	screw-type terminals
type of connectable conductor cross-sections for main contacts stranded	1 10 mm², 2x (2.5 6 mm²)
connectable conductor cross-section for main contacts finely	1 6 mm²
stranded with core end processing	
Safety related data	70.0/
proportion of dangerous failures with high demand rate according to SN 31920	73 %
B10 value with high demand rate according to SN 31920	1 000 000
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Approvals Certificates	
General Product Approval	For use in hazard- ous locations other Environment
	Confirmation Environmental Con- firmations

#### Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2220-0HD23-0AK6

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2220-0HD23-0AK6

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2220-0HD23-0AK6

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2220-0HD23-0AK6&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2220-0HD23-0AK6/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2220-0HD23-0AK6&objecttype=14&gridview=view1

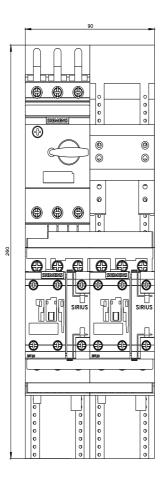

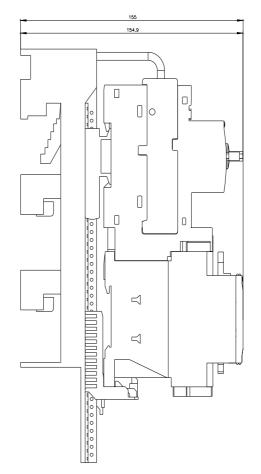

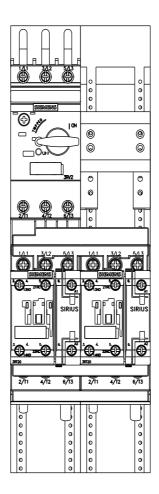

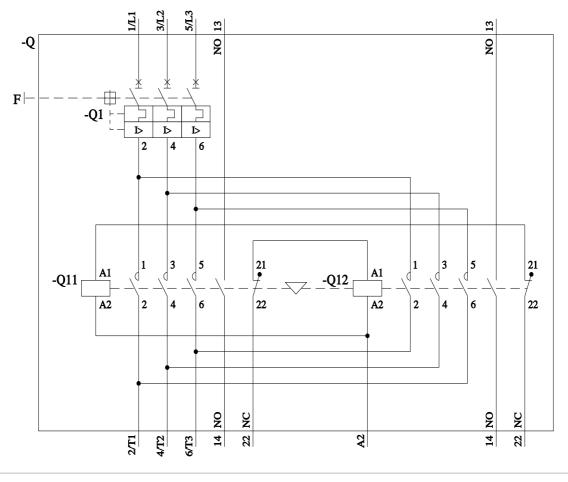

#### last modified:

3/11/2024 🖸

Subject to change without notice © Copyright Siemens

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RA22200HD230AK6