# SIEMENS

## Data sheet

## 3RA2315-8XB30-1AB0

reversing contactor assembly, AC-3e/AC-3, 7 A, 3 kW / 400 V, 3-pole, 24 V AC, 50/60 Hz, screw terminal, electrical and mechanical interlock



product brand name	SIRIUS
product designation	Reversing contactor assembly
product type designation	3RA23
manufacturer's article number	
<ul> <li>1 of the supplied contactor</li> </ul>	<u>3RT2015-1AB02</u>
<ul> <li>2 of the supplied contactor</li> </ul>	<u>3RT2015-1AB02</u>
<ul> <li>of the supplied RH assembly kit</li> </ul>	<u>3RA2913-2AA1</u>
General technical data	
size of contactor	S00
product extension auxiliary switch	Yes
shock resistance at rectangular impulse	
• at AC	6,7g / 5 ms, 4,2g / 10 ms
• at DC	6,7g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	10,5g / 5 ms, 6,6g / 10 ms
• at DC	10,5g / 5 ms, 6,6g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of contactor typical</li> </ul>	10 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V
operational current	
• at AC-3	
— at 400 V rated value	7 A
— at 500 V rated value	6 A
— at 690 V rated value	4.9 A
• at AC-3e	
— at 400 V rated value	7 A

— at 500 V rated value	6 A
— at 690 V rated value	4.9 A
operating power	
• at AC-3	
— at 400 V rated value	3 kW
— at 500 V rated value	3 kW
— at 690 V rated value	4 kW
● at AC-3e	
— at 400 V rated value	3 kW
— at 690 V rated value	4 kW
<ul> <li>at AC-4 at 400 V rated value</li> </ul>	3 kW
operating frequency	
<ul> <li>at AC-3 maximum</li> </ul>	750 1/h
• at AC-3e maximum	750 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
operating range factor control supply voltage rated value of	
magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	27 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.8
apparent holding power of magnet coil at AC	
● at 50 Hz	4.2 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.25
• at 50 Hz Auxiliary circuit	0.25
Auxiliary circuit contact reliability of auxiliary contacts	<ul><li>0.25</li><li>&lt; 1 error per 100 million operating cycles</li></ul>
Auxiliary circuit	
Auxiliary circuit contact reliability of auxiliary contacts	
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings	
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor	< 1 error per 100 million operating cycles
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	< 1 error per 100 million operating cycles 4.8 A
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	< 1 error per 100 million operating cycles 4.8 A
Auxiliary circuit         contact reliability of auxiliary contacts         UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         yielded mechanical performance [hp] for 3-phase AC motor	< 1 error per 100 million operating cycles 4.8 A 6.1 A
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value vielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 460/480 V rated value • at 575/600 V rated value contact rating of auxiliary contacts according to UL	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value • at 575/600 V rated value <b>contact rating of auxiliary contacts according to UL</b> Short-circuit protection design of the fuse link	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value vielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 460/480 V rated value • at 575/600 V rated value Contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value vielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 460/480 V rated value • at 575/600 V rated value Contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required	<ul> <li>&lt; 1 error per 100 million operating cycles</li> <li>4.8 A</li> <li>6.1 A</li> <li>1.5 hp</li> <li>2 hp</li> <li>3 hp</li> <li>5 hp</li> <li>A600 / Q600</li> <li>gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A</li> <li>gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A</li> </ul>
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value • at 600 V rated value vielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value • at 575/600 V rated value <b>contact rating of auxiliary contacts according to UL</b> Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value vielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value • at 575/600 V rated value Contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value • at 600 V rated value vielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value • at 575/600 V rated value <b>contact rating of auxiliary contacts according to UL</b> Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	<ul> <li>&lt; 1 error per 100 million operating cycles</li> <li>4.8 A</li> <li>6.1 A</li> <li>1.5 hp</li> <li>2 hp</li> <li>3 hp</li> <li>5 hp</li> <li>A600 / Q600</li> <li>gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A</li> <li>gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A</li> </ul>
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value vielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value • at 575/600 V rated value Contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 G NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value vielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 460/480 V rated value • at 575/600 V rated value <b>contact rating of auxiliary contacts according to UL</b> Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail
Auxiliary circuit         contact reliability of auxiliary contacts         UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         yielded mechanical performance [hp] for 3-phase AC motor         • at 200/208 V rated value         • at 200/208 V rated value         • at 220/230 V rated value         • at 460/480 V rated value         • at 575/600 V rated value         contact rating of auxiliary contacts according to UL         Short-circuit protection         design of the fuse link         • for short-circuit protection of the main circuit         — with type of coordination 1 required         — with type of assignment 2 required         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm
Auxiliary circuit         contact reliability of auxiliary contacts         UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         • at 600 V rated value         • at 200/208 V rated value         • at 220/230 V rated value         • at 460/480 V rated value         • at 575/600 V rated value         • at 575/600 V rated value         contact rating of auxiliary contacts according to UL         Short-circuit protection         design of the fuse link         • for short-circuit protection of the main circuit         - with type of coordination 1 required         - with type of assignment 2 required         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 G NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm
Auxiliary circuit         contact reliability of auxiliary contacts         UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         yielded mechanical performance [hp] for 3-phase AC motor         • at 200/208 V rated value         • at 200/208 V rated value         • at 220/230 V rated value         • at 460/480 V rated value         • at 575/600 V rated value         • at 575/600 V rated value         contact rating of auxiliary contacts according to UL         Short-circuit protection         design of the fuse link         • for short-circuit protection of the main circuit         — with type of coordination 1 required         — with type of assignment 2 required         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 G NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm
Auxiliary circuit         contact reliability of auxiliary contacts         UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         • at 600 V rated value         vielded mechanical performance [hp] for 3-phase AC motor         • at 200/208 V rated value         • at 220/230 V rated value         • at 460/480 V rated value         • at 575/600 V rated value         • at 575/600 V rated value         contact rating of auxiliary contacts according to UL         Short-circuit protection         design of the fuse link         • for short-circuit protection of the main circuit         — with type of coordination 1 required         — with type of assignment 2 required         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         required spacing	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 G NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm
Auxiliary circuit         contact reliability of auxiliary contacts         UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         • at 600 V rated value         • at 200/208 V rated value         • at 220/230 V rated value         • at 460/480 V rated value         • at 460/480 V rated value         • at 575/600 V rated value         contact rating of auxiliary contacts according to UL         Short-circuit protection         design of the fuse link         • for short-circuit protection of the main circuit         — with type of coordination 1 required         — with type of assignment 2 required         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         required spacing         • with side-by-side mounting	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 G NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm
Auxiliary circuit contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value vielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards	< 1 error per 100 million operating cycles 4.8 A 6.1 A 1.5 hp 2 hp 3 hp 5 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm

dowowordo	6 mm
— downwards	6 mm
— at the side	6 mm
for grounded parts	0
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm
— at the side	6 mm
— downwards	6 mm
<ul> <li>for live parts</li> </ul>	
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm
— downwards	6 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
<ul> <li>for main current circuit</li> </ul>	screw-type terminals
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals
<ul> <li>at contactor for auxiliary contacts</li> </ul>	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections for main contacts	
• solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
<ul> <li>solid or stranded</li> </ul>	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x (0,5 4 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>— finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)
Safety related data	
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
with low demand rate according to SN 31920	40 %
with high demand rate according to SN 31920	75 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to EC	20 a
61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Communication/ Protocol	
product function bus communication	Yes
protocol is supported AS-Interface protocol	No
product function control circuit interface with IO link	No
Certificates/ approvals	
	Declaration of Conformity
General Product Approval	Declaration of Comonnity
Confirmation	1112
	EHE 25 CE
CSA UL	EG-Konf.
Test Certificates Marine / Shipp	ing
Type Test Certific- ates/Test Report         Special Test Certific- ate	Toyds
And the second se	Kegister
ABS	BUREAN DNV URS
ABS	BUREAU VERITAS
ABS	BOREAU
ABS Marine / Shipping	BOREAU
ABS Marine / Shipping	VERITAS
ABS Marine / Shipping	VERITAS

Subject to change without notice © Copyright Siemens







**Confirmation** 

Vibration and Shock

#### Further information

Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2315-8XB30-1AB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2315-8XB30-1AB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2315-8XB30-1AB0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2315-8XB30-1AB0&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2315-8XB30-1AB0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2315-8XB30-1AB0&objecttype=14&gridview=view1

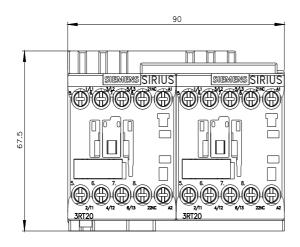



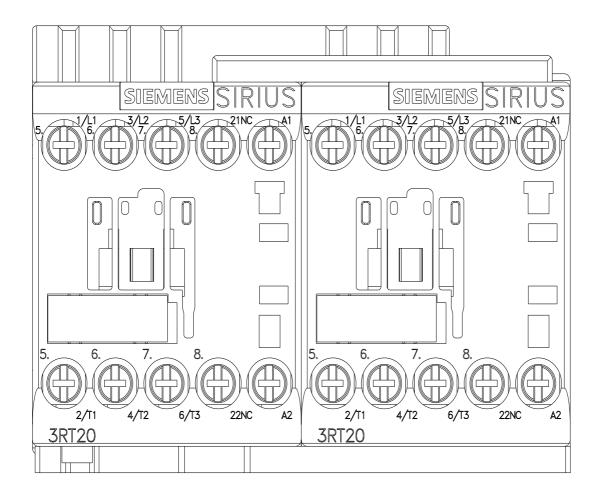

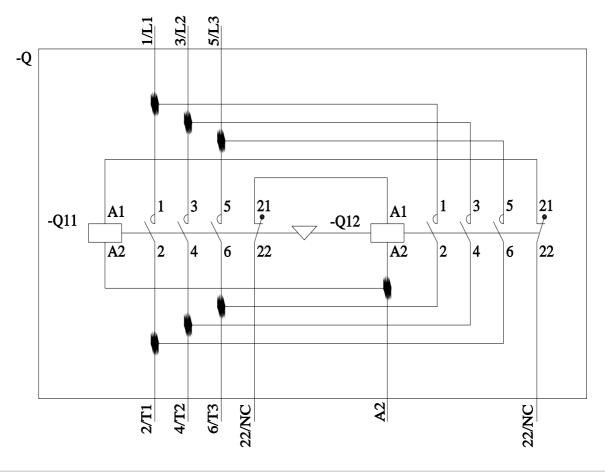

#### last modified:

11/21/2022 🖸

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RA23158XB301AB0