SIEMENS

Data sheet

3RA2316-8XB30-1BB4

reversing contactor assembly, AC-3e/AC-3, 9 A, 4 kW / 400 V, 3-pole, 24 V DC, screw terminal, electrical and mechanical interlock



product brand name	SIRIUS	
product designation	Reversing contactor assembly	
product type designation	3RA23	
manufacturer's article number		
1 of the supplied contactor	3RT2016-1BB42	
• 2 of the supplied contactor	3RT2016-1BB42	
 of the supplied RH assembly kit 	3RA2913-2AA1	
General technical data		
size of contactor	S00	
product extension auxiliary switch	Yes	
shock resistance at rectangular impulse		
• at AC	6,7g / 5 ms, 4,2g / 10 ms	
• at DC	6,7g / 5 ms, 4,2g / 10 ms	
shock resistance with sine pulse		
• at AC	10,5g / 5 ms, 6,6g / 10 ms	
• at DC	10,5g / 5 ms, 6,6g / 10 ms	
mechanical service life (operating cycles)		
 of contactor typical 	10 000 000	
of the contactor with added auxiliary switch block typical	10 000 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	10/01/2009	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
 during operation 	-25 +60 °C	
during storage	-55 +80 °C	
Main circuit		
number of poles for main current circuit	3	
number of NO contacts for main contacts	3	
number of NC contacts for main contacts	0	
operating voltage		
 at AC-3 rated value maximum 	690 V	
at AC-3e rated value maximum	690 V	
operational current		
• at AC-3		
— at 400 V rated value	9 A	
— at 500 V rated value	7.7 A	
— at 690 V rated value	6.7 A	
• at AC-3e		
— at 400 V rated value	9 A	

— at 500 V rated value	7.7 A
— at 690 V rated value	6.7 A
operating power	
• at AC-3	
— at 400 V rated value	4 kW
— at 500 V rated value	4 kW
— at 690 V rated value	5.5 kW
• at AC-3e	
— at 400 V rated value	4 kW
— at 690 V rated value	5.5 kW
• at AC-4 at 400 V rated value	4 kW
operating frequency	
• at AC-3 maximum	750 1/h
• at AC-3e maximum	750 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
at DC rated value	24 V
closing power of magnet coil at DC	4 W
holding power of magnet coil at DC	4 W
Auxiliary circuit	
contact reliability of auxiliary contacts	< 1 error per 100 million operating cycles
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	7.6 A
at 600 V rated value at 600 V rated value	9 A
yielded mechanical performance [hp] for 3-phase AC motor	¥A
at 200/208 V rated value	2 hn
	2 hp
 at 220/230 V rated value at 460/480 V rated value 	3 hp
	5 hp
at 575/600 V rated value	7.5 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
1 1 60 6 111	
design of the fuse link	
• for short-circuit protection of the main circuit	O AULONA DIA TER FOR NEGOTER FOE OF A
 for short-circuit protection of the main circuit — with type of coordination 1 required 	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 35 A
 for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required 	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A
 for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required for short-circuit protection of the auxiliary switch required 	
 for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required 	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A
 for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required for short-circuit protection of the auxiliary switch required 	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm 6 mm 0 mm 6 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm 6 mm 6 mm 6 mm 6 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm 6 mm 0 mm 6 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm 6 mm 6 mm 6 mm 6 mm 6 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm 6 mm 6 mm 6 mm 6 mm 6 mm
• for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — backwards — at the side • for grounded parts — backwards — backwards — backwards — backwards	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — backwards — backwards — backwards — at the side • for grounded parts — backwards — backwards — backwards — upwards — backwards — upwards	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — backwards — backwards — upwards — at the side • for wards — backwards — upwards — at the side — the side	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — at the side • for grounded parts — backwards — backwards — at the side — torwards — backwards — upwards — at the side — downwards — at the side — at the side — downwards — at the side — downwards	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm
• for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — backwards — upwards — backwards — at the side — downwards — for live parts	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm
for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — at the side • for grounded parts — backwards — backwards — at the side — torwards — backwards — upwards — at the side — downwards — at the side — at the side — downwards — at the side — downwards	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 20 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm

— upwards	6 mm
— downwards	6 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
• for main current circuit	screw-type terminals
 for auxiliary and control circuit 	screw-type terminals
 at contactor for auxiliary contacts 	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections for main contacts	
• solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
 solid or stranded 	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x (0,5 4 mm²)
finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
type of connectable conductor cross-sections	
for auxiliary contacts	
 solid or stranded 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 for AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14)
Safety related data	
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	75 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20

product function bus communication

protocol is supported AS-Interface protocol

product function control circuit interface with IO link

General Product Approval

Declaration of Conformity



Certificates/ approvals

Confirmation

touch protection on the front according to IEC 60529



Yes

No

No



finger-safe, for vertical contact from the front





Test Certificates

Marine / Shipping

Special Test Certific-<u>ate</u>

Type Test Certificates/Test Report









Marine / Shipping

other

Railway

Dangerous Good







Confirmation

Vibration and Shock

Transport Information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2316-8XB30-1BB4

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2316-8XB30-1BB4

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RA2316-8XB30-1BB4


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2316-8XB30-1BB4/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2316-8XB30-1BB4&objecttype=14&gridview=view1





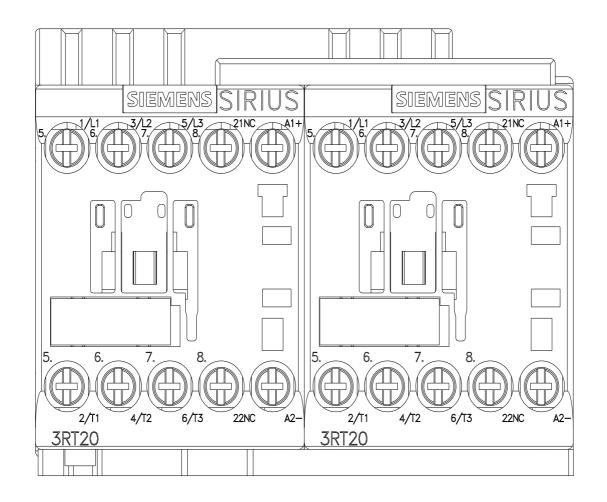

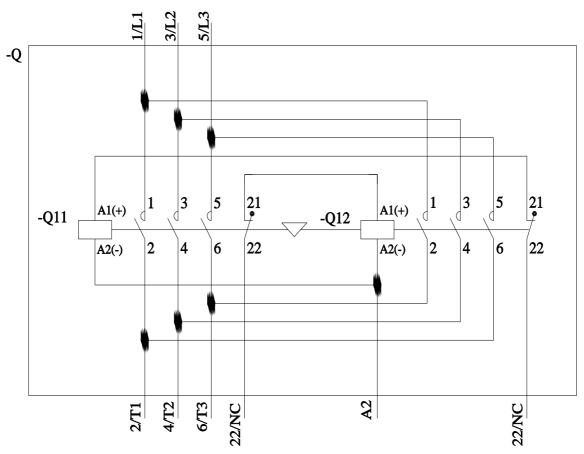

last modified: 11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RA23168XB301BB4