# **SIEMENS**

## **Data sheet**

## 3RA2317-8XB30-1AB0

reversing contactor assembly, AC-3e/AC-3, 12 A, 5.5 kW / 400 V, 3-pole, 24 V AC, 50/60 Hz, screw terminal, electrical and mechanical interlock



product brand name	SINIUS
product designation	Reversing contactor assembly
product type designation	3RA23
manufacturer's article number	
<ul> <li>1 of the supplied contactor</li> </ul>	3RT2017-1AB02
<ul><li>2 of the supplied contactor</li></ul>	3RT2017-1AB02
<ul> <li>of the supplied RH assembly kit</li> </ul>	3RA2913-2AA1
General technical data	
size of contactor	S00
product extension auxiliary switch	Yes
shock resistance at rectangular impulse	
• at AC	7,3g / 5 ms, 4,7g / 10 ms
• at DC	7.3g / 5 ms, 4.7g / 10 ms
shock resistance with sine pulse	
• at AC	11,4g / 5 ms, 7,3g / 10 ms
• at DC	11,4g / 5 ms, 7,3g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V
operational current	
• at AC-3	
— at 400 V rated value	12 A
— at 500 V rated value	9.2 A
— at 690 V rated value	6.7 A
• at AC-3e	
— at 400 V rated value	12 A

SIRIUS

— at 500 V rated value	9.2 A
— at 690 V rated value	6.7 A
operating power	
• at AC-3	
— at 400 V rated value	5.5 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	5.5 kW
• at AC-3e	
— at 400 V rated value	5.5 kW
— at 690 V rated value	5.5 kW
<ul> <li>at AC-4 at 400 V rated value</li> </ul>	4 kW
operating frequency	
• at AC-3 maximum	750 1/h
• at AC-3e maximum	750 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
at 60 Hz rated value	24 V
operating range factor control supply voltage rated value of	
magnet coil at AC	
● at 50 Hz	0.8 1.1
• at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	37 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.8
apparent holding power of magnet coil at AC	
• at 50 Hz	5.7 VA
inductive power factor with the holding power of the coil	0.1 471
	0.28
at 50 Hz  Auxiliary circuit	0.20
Auxiliary circuit	
Auxiliary circuit contact reliability of auxiliary contacts	< 1 error per 100 million operating cycles
Auxiliary circuit  contact reliability of auxiliary contacts  UL/CSA ratings	
Auxiliary circuit  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	< 1 error per 100 million operating cycles
Auxiliary circuit  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value	< 1 error per 100 million operating cycles  11 A
Auxiliary circuit  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value	< 1 error per 100 million operating cycles
Auxiliary circuit  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor	< 1 error per 100 million operating cycles  11 A 11 A
Auxiliary circuit  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value	< 1 error per 100 million operating cycles  11 A 11 A 1.5 hp
Auxiliary circuit  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value  • at 220/230 V rated value	< 1 error per 100 million operating cycles  11 A  11 A  1.5 hp 3 hp
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value  • at 220/230 V rated value  • at 460/480 V rated value	< 1 error per 100 million operating cycles  11 A 11 A 1.5 hp 3 hp 7.5 hp
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value  • at 220/230 V rated value  • at 460/480 V rated value  • at 575/600 V rated value	< 1 error per 100 million operating cycles  11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value  contact rating of auxiliary contacts according to UL	< 1 error per 100 million operating cycles  11 A 11 A 1.5 hp 3 hp 7.5 hp
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value  • at 220/230 V rated value  • at 460/480 V rated value  • at 575/600 V rated value	< 1 error per 100 million operating cycles  11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value  contact rating of auxiliary contacts according to UL	< 1 error per 100 million operating cycles  11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp
Auxiliary circuit  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value  • at 220/230 V rated value  • at 460/480 V rated value  • at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection	< 1 error per 100 million operating cycles  11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link	< 1 error per 100 million operating cycles  11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit	< 1 error per 100 million operating cycles 11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required	< 1 error per 100 million operating cycles 11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	< 1 error per 100 million operating cycles 11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	< 1 error per 100 million operating cycles 11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A
Contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value  • at 220/230 V rated value  • at 460/480 V rated value  • at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	< 1 error per 100 million operating cycles 11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A
Contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor  • at 200/208 V rated value  • at 220/230 V rated value  • at 460/480 V rated value  • at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	< 1 error per 100 million operating cycles 11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] for 3-phase AC motor • at 200/208 V rated value • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions mounting position	< 1 error per 100 million operating cycles 11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	4 1 error per 100 million operating cycles 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	4 1 error per 100 million operating cycles 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	< 1 error per 100 million operating cycles 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	< 1 error per 100 million operating cycles 11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	< 1 error per 100 million operating cycles 11 A 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	<1 error per 100 million operating cycles 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm
Auxiliary circuit contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	<1 error per 100 million operating cycles 11 A 1.5 hp 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 68 mm 90 mm 73 mm

40 % 75 % 100 FIT 20 a  IP20 finger-safe, for vertical contact from the front  Yes No No
40 % 75 % 100 FIT 20 a  IP20 finger-safe, for vertical contact from the front  Yes
40 % 75 % 100 FIT 20 a IP20 finger-safe, for vertical contact from the front
40 % 75 % 100 FIT 20 a
40 % 75 % 100 FIT 20 a
40 % 75 % 100 FIT 20 a
40 % 75 % 100 FIT
40 % 75 %
40 %
1 000 000
1 000 000
1 000 000
2x (20 16), 2x (18 14)
2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x (0,5 4 mm²)
Screw-type terminals
Screw-type terminals
screw-type terminals
screw-type terminals
6 mm
6 mm
6 mm
0 mm
6 mm
6 mm
6 mm
6 mm
0 mm
6 mm
6 mm
6 mm

General Product Approval

**Declaration of Conformity** 



Confirmation









**Test Certificates** 

Marine / Shipping

**Special Test Certific-**<u>ate</u>

Type Test Certificates/Test Report









Marine / Shipping

other

Railway







#### **Further information**

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

#### Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2317-8XB30-1AB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2317-8XB30-1AB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2317-8XB30-1AB0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2317-8XB30-1AB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2317-8XB30-1AB0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2317-8XB30-1AB0&objecttype=14&gridview=view1

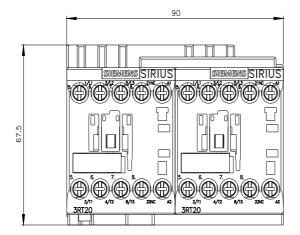

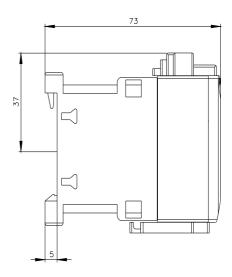

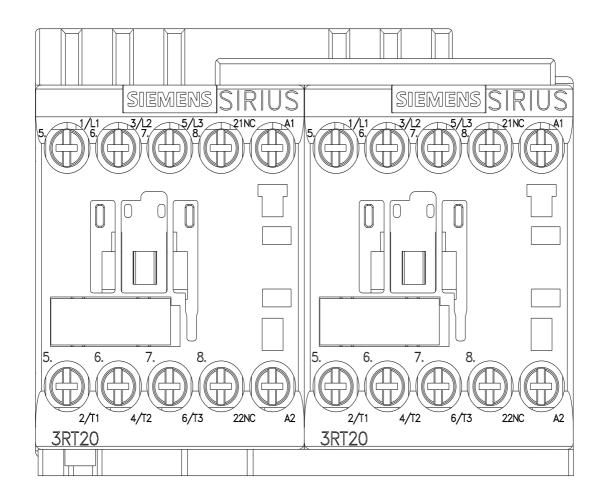

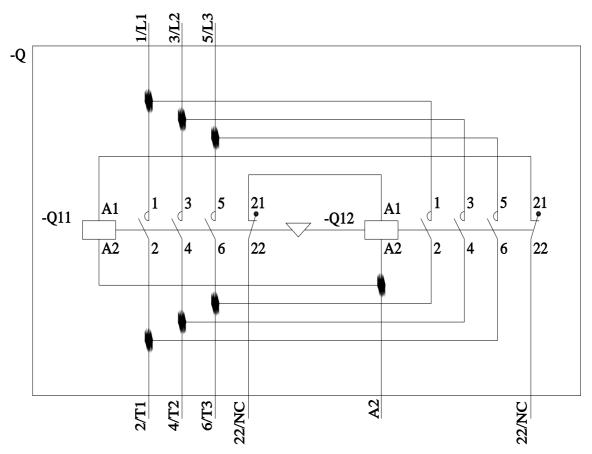

last modified: 11/21/2022 🖸

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RA23178XB301AB0