SIEMENS

Data sheet

3RA2317-8XE30-2BB4



reversing contactor assembly, AC-3e/AC-3, 12 A, 5.5 kW / 400 V, 3-pole, 24 V DC, spring-loaded terminal, electrical and mechanical interlock, with voltage tap for 3RA27

| product brand name | SIRIUS | | | |
|--|------------------------------|--|--|--|
| product designation | Reversing contactor assembly | | | |
| product type designation | 3RA23 | | | |
| manufacturer's article number | | | | |
| • 1 of the supplied contactor | <u>3RT2017-2BB42-0CC0</u> | | | |
| • 2 of the supplied contactor | <u>3RT2017-2BB42</u> | | | |
| of the supplied RH assembly kit | <u>3RA2913-2AA2</u> | | | |
| General technical data | | | | |
| size of contactor | S00 | | | |
| product extension auxiliary switch | Yes | | | |
| shock resistance at rectangular impulse | | | | |
| • at AC | 7,3g / 5 ms, 4,7g / 10 ms | | | |
| • at DC | 7.3g / 5 ms, 4.7g / 10 ms | | | |
| shock resistance with sine pulse | | | | |
| • at AC | 11,4g / 5 ms, 7,3g / 10 ms | | | |
| • at DC | 11,4g / 5 ms, 7,3g / 10 ms | | | |
| mechanical service life (operating cycles) | | | | |
| of contactor typical | 10 000 000 | | | |
| of the contactor with added auxiliary switch block typical | 10 000 000 | | | |
| reference code according to IEC 81346-2 | Q | | | |
| Substance Prohibitance (Date) | 10/01/2009 | | | |
| SVHC substance name | Blei - 7439-92-1 | | | |
| Ambient conditions | | | | |
| installation altitude at height above sea level maximum | 2 000 m | | | |
| ambient temperature | | | | |
| during operation | -25 +60 °C | | | |
| during storage | -55 +80 °C | | | |
| Main circuit | | | | |
| number of poles for main current circuit | 3 | | | |
| number of NO contacts for main contacts | 3 | | | |
| number of NC contacts for main contacts | 0 | | | |
| operating voltage | | | | |
| at AC-3 rated value maximum | 690 V | | | |
| • at AC-3e rated value maximum | 690 V | | | |
| operational current | | | | |
| • at AC-3 | | | | |
| | 12 A | | | |
| — at 400 V rated value | 12 A | | | |
| — at 400 V rated value — at 500 V rated value | 9.2 A | | | |
| | | | | |

| — at 400 V rated value | 12 A | | |
|--|--|--|--|
| — at 500 V rated value | 9.2 A | | |
| — at 690 V rated value | 6.7 A | | |
| operating power | | | |
| • at AC-3 | | | |
| — at 400 V rated value | 5.5 kW | | |
| — at 500 V rated value | 5.5 kW | | |
| — at 690 V rated value | 5.5 kW | | |
| • at AC-3e | | | |
| — at 400 V rated value | 5.5 kW | | |
| — at 690 V rated value | 5.5 kW | | |
| • at AC-4 at 400 V rated value | 4 kW | | |
| operating frequency | | | |
| • at AC-3 maximum | 750 1/h | | |
| • at AC-3e maximum | 750 1/h | | |
| Control circuit/ Control | | | |
| type of voltage of the control supply voltage | DC | | |
| control supply voltage 1 | | | |
| • at DC rated value | 24 V | | |
| closing power of magnet coil at DC | 4 W | | |
| holding power of magnet coil at DC | 4 W | | |
| Auxiliary circuit | | | |
| contact reliability of auxiliary contacts | < 1 error per 100 million operating cycles | | |
| UL/CSA ratings | | | |
| full-load current (FLA) for 3-phase AC motor | | | |
| at 480 V rated value | 11 A | | |
| | 11 A | | |
| at 600 V rated value | IIA | | |
| yielded mechanical performance [hp] for 3-phase AC motor | 4.5 hz | | |
| at 200/208 V rated value | 1.5 hp | | |
| at 220/230 V rated value | 3 hp | | |
| • at 460/480 V rated value | 7.5 hp | | |
| at 575/600 V rated value | 10 hp | | |
| | | | |
| contact rating of auxiliary contacts according to UL | A600 / Q600 | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection | | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link | | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection | | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required | | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit | A600 / Q600 | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm 6 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm 6 mm 0 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm 6 mm 0 mm 6 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm 6 mm 6 mm 6 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — a the side | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm 6 mm 6 mm 6 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - upwards - downwards - at the side • for grounded parts - forwards | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm 6 mm 6 mm 6 mm 6 mm 6 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — at the side • for grounded parts — backwards | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - upwards - at the side • for grounded parts - forwards - at the side • for wards - upwards | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — upwards — backwards — upwards — at the side | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - at the side • for grounded parts - forwards - backwards - at the side - downwards | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm | | |
| contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — upwards — backwards — upwards — at the side | A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 84 mm 90 mm 83 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm 6 mm | | |

| — backwards | | | 0 mm | | |
|--|---|--|-------------------------------|----------------------|---------------------------|
| — upwards | | | 6 mm | | |
| — downwards | 8 | | 6 mm | | |
| — at the side | 5 | | 6 mm | | |
| Connections/ Terminal | s | | 0 mm | | |
| type of electrical con | | | | | |
| for main current | | | spring-loaded terminals | | |
| for auxiliary and control circuit | | spring-loaded terminals | | | |
| at contactor for auxiliary contacts | | Spring-type terminals | | | |
| of magnet coil | | Spring-type terminals | | | |
| type of connectable co | nductor cross-sections for | main contacts | | | |
| • solid | | 2x (0.5 4 mm²) | | | |
| solid or stranded | | 2x (0,5 4 mm²) | | | |
| finely stranded v | vith core end processing | | 2x (0.5 2.5 mm²) | | |
| finely stranded v | vithout core end processin | g | 2x (0.5 2.5 mm ²) | | |
| type of connectable of | conductor cross-sections | 6 | | | |
| for auxiliary cont | tacts | | | | |
| - solid or stra | anded | | 2x (0.5 2.5 mm²) | | |
| — finely stran | ded with core end process | sing | 2x (0.5 1.5 mm²) | | |
| — finely stran | ded without core end proc | essing | 2x (0.5 1.5 mm²) | | |
| for AWG cables | for auxiliary contacts | | 2x (20 14) | | |
| Safety related data | | | | | |
| B10 value with high de | mand rate according to SN | N 31920 | 1 000 000 | | |
| proportion of danger | ous failures | | | | |
| with low demand rate according to SN 31920 | | 40 % | | | |
| with high demand rate according to SN 31920 | | 75 % | | | |
| failure rate [FIT] with lo | w demand rate according | to SN 31920 | 100 FIT | | |
| T1 value for proof test interval or service life according to IEC 61508 | | 20 a | | | |
| protection class IP on the front according to IEC 60529 | | IP20 | | | |
| touch protection on the front according to IEC 60529 | | finger-safe, for vertical contact from the front | | | |
| Communication/ Proto | col | | | | |
| product function bus communication | | Yes | | | |
| protocol is supported AS-Interface protocol | | No | | | |
| product function control circuit interface with IO link | | No | | | |
| Certificates/ approvals | | | | | |
| General Product App | oroval | | | Declaration of Confo | rmity |
| | <u>Confirmation</u> | | EHC | CE EG-Konf. | UK CA |
| Test Certificates | | Marine / Shipp | ing | | |
| <u>Type Test Certific-</u> ates/Test Report | <u>Special Test Certific-</u> <u>ate</u> | ABS | BUREAU VERITAS | | Llovd's Register us |
| Marine / Shipping | | | other | Railway | Dangerous Good |
| PRS | RINA | | Confirmation | Vibration and Shock | Transport Information |
| | I to exit the Russian mar | | wn-russian-business | | |
| | on the renewal of the cur | | | | |

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10 Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2317-8XE30-2BB4

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2317-8XE30-2BB4

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2317-8XE30


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2317-8XE30-2BB4&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2317-8XE30-2BB4/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2317-8XE30-2BB4&objecttype=14&gridview=view1

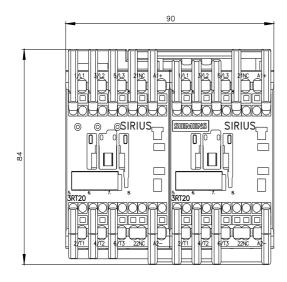

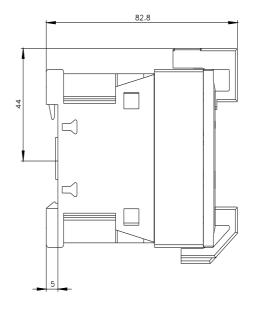

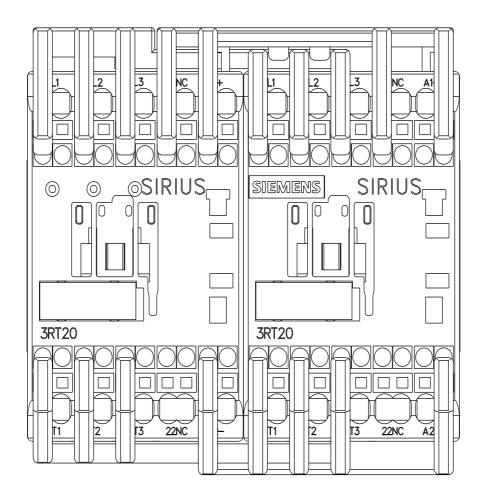

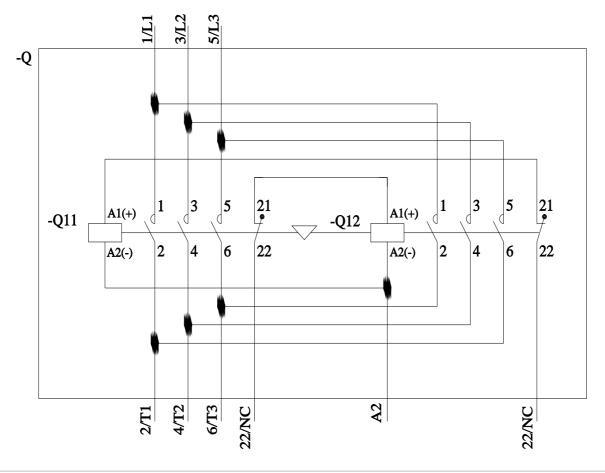

last modified:

8/7/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RA23178XE302BB4