SIEMENS

Data sheet

3RA2324-8XB30-2AC2



reversing contactor assembly, AC-3e/AC-3, 12 A, 5.5 kW / 400 V, 3-pole, 24 V AC, 50/60 Hz, spring-loaded terminal, electrical and mechanical interlock, auxiliary contacts: 2 x 1 NO

product brand name	SIRIUS	
product designation	Reversing contactor assembly	
product type designation	3RA23	
manufacturer's article number		
 1 of the supplied contactor 	<u>3RT2024-2AC20</u>	
 2 of the supplied contactor 	<u>3RT2024-2AC20</u>	
 of the supplied RH assembly kit 	<u>3RA2923-2AA2</u>	
General technical data		
size of contactor	SO	
product extension auxiliary switch	Yes	
shock resistance at rectangular impulse		
• at AC	7,5g / 5 ms, 4,7g / 10 ms	
• at DC	10g / 5 ms, 7,5g / 10 ms	
shock resistance with sine pulse		
• at AC	11,8g / 5 ms, 7,4g / 10 ms	
• at DC	15g / 5 ms, 10g / 10 ms	
mechanical service life (operating cycles)		
 of contactor typical 	10 000 000	
 of the contactor with added auxiliary switch block typical 	10 000 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	10/01/2009	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
during operation	-25 +60 °C	
during storage	-55 +80 °C	
Main circuit		
number of poles for main current circuit	3	
number of NO contacts for main contacts	3	
number of NC contacts for main contacts	0	
operating voltage		
 at AC-3 rated value maximum 	690 V	
 at AC-3e rated value maximum 	690 V	
operational current		
• at AC-3		
— at 400 V rated value	12 A	
— at 500 V rated value	12 A	
— at 690 V rated value	9 A	
• at AC-3e		
— at 400 V rated value	12 A	

— at 500 V rated value	12 A
— at 690 V rated value	9 A
operating power	
• at AC-3	
— at 400 V rated value	5.5 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	7.5 kW
• at AC-3e	
— at 400 V rated value	5.5 kW
— at 690 V rated value	7.5 kW
 at AC-4 at 400 V rated value 	5.5 kW
operating frequency	
• at AC-3 maximum	1 000 1/h
• at AC-3e maximum	1 000 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
at 50 Hz rated value	241/
	24 V 24 V
at 60 Hz rated value	24 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	65 VA
inductive power factor with closing power of the coil	
at 50 Hz	0.82
	0.62
apparent holding power of magnet coil at AC	0.51/4
• at 50 Hz	8.5 VA
inductive power factor with the holding power of the coil	0.05
• at 50 Hz	0.25
A constituence of the cons	
Auxiliary circuit	
number of NO contacts for auxiliary contacts	
number of NO contacts for auxiliary contacts per direction of rotation 	1
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact 	2
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts	
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings	2
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts	2
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings	2
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor 	2 < 1 error per 100 million operating cycles
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value 	2 <1 error per 100 million operating cycles 11 A
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value 	2 <1 error per 100 million operating cycles 11 A
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor	2 < 1 error per 100 million operating cycles 11 A 11 A
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor at 220/230 V rated value 	2 < 1 error per 100 million operating cycles 11 A 11 A 3 hp
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor at 220/230 V rated value at 460/480 V rated value 	2 <1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor at 220/230 V rated value at 460/480 V rated value at 460/480 V rated value at 575/600 V rated value 	2 < 1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp 10 hp
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL 	2 < 1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp 10 hp
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection	2 < 1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp 10 hp
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor at 220/230 V rated value at 460/480 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link	2 <1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp 10 hp
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor at 220/230 V rated value at 460/480 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit 	2 < 1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp 10 hp A600 / Q600
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required with type of assignment 2 required 	2 < 1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of assignment 2 required for short-circuit protection of the auxiliary switch required 	2 < 1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	2 < 1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of assignment 2 required for short-circuit protection of the auxiliary switch required 	2 < 1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	2 < 1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	2 < 1 error per 100 million operating cycles 11 A 11 A 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position 	2 < 1 error per 100 million operating cycles 11 A 11 A 11 A 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	2 < 1 error per 100 million operating cycles 11 A 11 A 1 A 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and can be the tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward by +/- 2
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	2 < 1 error per 100 million operating cycles 11 A 11 A 11 A 3 hp 7.5 hp 10 hp A600 / Q600
number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 460/480 V rated value at 575/600 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth 	2 < 1 error per 100 million operating cycles 11 A 11 A 11 A 3 hp 7.5 hp 10 hp A600 / Q600
number of NO contacts for auxiliary contacts • per direction of rotation • instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value vielded mechanical performance [hp] for 3-phase AC motor • at 220/230 V rated value • at 460/480 V rated value • at 575/600 V rated value • at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	2 < 1 error per 100 million operating cycles 11 A 11 A 11 A 3 hp 7.5 hp 10 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 114 mm 90 mm

ERIC ERIC	L CE UK A Special Test Certific- ate
	·
General Product Approval	Declaration of Conformity Test Certificates
Certificates/ approvals	
product function control circuit interface with IO link	No
protocol is supported AS-Interface protocol	No
product function bus communication	Yes
Communication/ Protocol	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
61508 protection class IP on the front according to IEC 60529	IP20
T1 value for proof test interval or service life according to IEC	20 a
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
 with high demand rate according to SN 31920 	75 %
 with low demand rate according to SN 31920 	40 %
proportion of dangerous failures	
B10 value with high demand rate according to SN 31920	1 000 000
Safety related data	
for AWG cables for auxiliary contacts	2x (20 14)
— finely stranded without core end processing	2x (0.5 1.5 mm ²)
— finely stranded with core end processing	2x (0.5 1.5 mm ²)
— solid or stranded	2x (0.5 2.5 mm²)
for auxiliary contacts	
type of connectable conductor cross-sections	
finely stranded without core end processing	2x (1 6 mm ²)
 finely stranded with core end processing 	2x (1 6 mm ²)
 solid or stranded 	2x (1 10 mm ²)
• solid	2x (1 10 mm²)
type of connectable conductor cross-sections for main contacts	
of magnet coil	Spring-type terminals
 at contactor for auxiliary contacts 	Spring-type terminals
 for auxiliary and control circuit 	spring-loaded terminals
for main current circuit	spring-loaded terminals
type of electrical connection	
Connections/ Terminals	
— at the side	6 mm
— downwards	6 mm
— upwards	6 mm
— backwards	0 mm
— forwards	6 mm
 for live parts 	
— downwards	6 mm
— at the side	6 mm
— upwards	6 mm
— backwards	0 mm
— forwards	6 mm
for grounded parts	0 mm
— downwards — at the side	6 mm 6 mm
— upwards	6 mm
— backwards	0 mm

Marine / Shipping



Railway





Marine / Shipping

Confirmation

other

Vibration and Shock

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2324-8XB30-2AC2

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2324-8XB30-2AC2

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2324-8XB30-2AC2

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2324-8XB30-2AC2&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2324-8XB30-2AC2/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2324-8XB30-2AC2&objecttype=14&gridview=view1

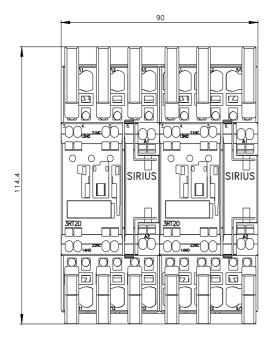

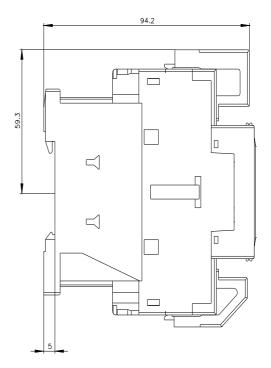

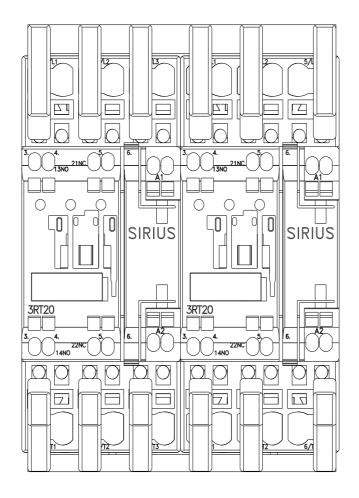

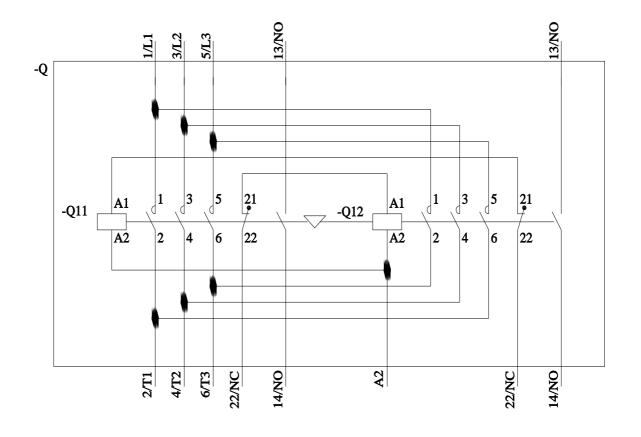

last modified:

11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RA23248XB302AC2