## SIEMENS

## Data sheet

## 3RA6400-1CB42





SIRIUS Compact load feeder DOL starter for IO-Link 690 V 24 V DC 1...4 A IP20 Connection main circuit: Screw terminal Connection control circuit: screw terminal


4 673	
product brand name	SIRIUS
product designation	Compact starter for IO-Link
design of the product	direct starter
product type designation	3RA64
General technical data	
product function control circuit interface to parallel wiring	No
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	1 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	0.33 W
<ul> <li>without load current share typical</li> </ul>	2.9 W
insulation voltage rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 000 V
degree of protection NEMA rating	other
shock resistance	a=60 m/s2 (6g) with 10 ms per 3 shocks in all axes
vibration resistance	f= 4 5.8 Hz, d= 15 mm; f= 5.8 500 Hz, a= 20 m/s²; 10 cycles
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	10 000 000
<ul> <li>of auxiliary contacts typical</li> </ul>	10 000 000
<ul> <li>of the signaling contacts typical</li> </ul>	10 000 000
electrical endurance (operating cycles) of auxiliary contacts	
<ul> <li>at DC-13 at 6 A at 24 V typical</li> </ul>	30 000
<ul> <li>at AC-15 at 6 A at 230 V typical</li> </ul>	200 000
type of assignment	continous operation according to IEC 60947-6-2
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 Bleititanzirkonoxid - 12626-81-2 2,2',6,6'-Tetrabrom-4,4'-isopropylidendi - 79-94-7
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
<ul> <li>during storage</li> </ul>	-55 +80 °C
during transport	-55 +80 °C
relative humidity during operation	10 90 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-	1 4 A


dependent overload release	
formula for making capacity limit current	12 x le
formula for limit current breaking capacity	10 x le
yielded mechanical performance for 4-pole AC motor	
at 400 V rated value	1.5 kW
• at 500 V rated value	2.2 kW
at 690 V rated value	3 kW
operating voltage at AC-3 rated value maximum	690 V
operational current	
• at AC at 400 V rated value	4 A
• at AC-3 at 400 V rated value	4 A
• at AC-43	
— at 400 V rated value	3.6 A
— at 500 V rated value	3.9 A
— at 690 V rated value	3.8 A
operating power	
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	1.5 kW
• at AC-43	
— at 400 V rated value	1 500 W
— at 500 V rated value	2 200 W
— at 690 V rated value	3 000 W
no-load switching frequency	3 600 1/h
operating frequency	
<ul> <li>at AC-41 according to IEC 60947-6-2 maximum</li> </ul>	750 1/h
<ul> <li>at AC-43 according to IEC 60947-6-2 maximum</li> </ul>	250 1/h
Control circuit/ Control	
type of voltage	DC
control supply voltage 1	
at DC rated value	24 V
• at DC	24 24 V
nolaing power	
<ul> <li>holding power</li> <li>at DC maximum</li> </ul>	2.9 W
	2.9 W
• at DC maximum Auxiliary circuit	2.9 W
• at DC maximum	
at DC maximum     Auxiliary circuit     number of NC contacts for auxiliary contacts	0
at DC maximum      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for	0 0
at DC maximum      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload	0 0 0
at DC maximum      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload     release for signaling contact	0 0 0 0
Auxiliary circuit      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload     release for signaling contact      operational current of auxiliary contacts at AC-12 maximum	0 0 0 0 10 A
Auxiliary circuit      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload     release for signaling contact      operational current of auxiliary contacts at AC-12 maximum     operational current of auxiliary contacts at DC-13 at 250 V	0 0 0 0 10 A
Auxiliary circuit      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload     release for signaling contact      operational current of auxiliary contacts at AC-12 maximum     operational current of auxiliary contacts at DC-13 at 250 V      Protective and monitoring functions	0 0 0 0 10 A 0.27 A
At DC maximum  Auxiliary circuit  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of NO contacts of instantaneous short-circuit trip unit for signaling contact  number of CO contacts of the current-dependent overload release for signaling contact  operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V  Protective and monitoring functions  trip class	0 0 0 0 10 A 0.27 A
at DC maximum      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload     release for signaling contact      operational current of auxiliary contacts at AC-12 maximum     operational current of auxiliary contacts at DC-13 at 250 V      Protective and monitoring functions      trip class      operating short-circuit current breaking capacity (lcs)	0 0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable
Auxiliary circuit      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload     release for signaling contact      operational current of auxiliary contacts at AC-12 maximum     operational current of auxiliary contacts at DC-13 at 250 V      Protective and monitoring functions      trip class     operating short-circuit current breaking capacity (Ics)         e at 400 V	0 0 0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA
at DC maximum      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload     release for signaling contact      operational current of auxiliary contacts at AC-12 maximum     operational current of auxiliary contacts at DC-13 at 250 V      Protective and monitoring functions      trip class      operating short-circuit current breaking capacity (Ics)         e at 400 V          e at 500 V rated value	0 0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA
at DC maximum  Auxiliary circuit  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of NO contacts of instantaneous short-circuit trip unit for signaling contact  number of CO contacts of the current-dependent overload release for signaling contact  operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V  Protective and monitoring functions  trip class  operating short-circuit current breaking capacity (lcs)      at 400 V      at 500 V rated value      at 690 V rated value	0 0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA
at DC maximum  Auxiliary circuit  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of NO contacts of instantaneous short-circuit trip unit for signaling contact  number of CO contacts of the current-dependent overload release for signaling contact  operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V  Protective and monitoring functions  trip class  operating short-circuit current breaking capacity (Ics)      at 400 V      at 500 V rated value     at 690 V rated value	0 0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA
at DC maximum      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload     release for signaling contact      operational current of auxiliary contacts at AC-12 maximum     operational current of auxiliary contacts at DC-13 at 250 V      Protective and monitoring functions      trip class      operating short-circuit current breaking capacity (Ics)          at 400 V          at 500 V rated value          at 690 V rated value          UL/CSA ratings      full-load current (FLA) for 3-phase AC motor	0 0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA 3 kA
at DC maximum      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload     release for signaling contact      operational current of auxiliary contacts at AC-12 maximum     operational current of auxiliary contacts at DC-13 at 250 V      Protective and monitoring functions      trip class      operating short-circuit current breaking capacity (Ics)          at 400 V          at 500 V rated value          at 690 V rated value          tull-load current (FLA) for 3-phase AC motor          at 480 V rated value	0 0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA 3 kA 3 kA
at DC maximum      Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload     release for signaling contact      operational current of auxiliary contacts at AC-12 maximum     operational current of auxiliary contacts at DC-13 at 250 V      Protective and monitoring functions      trip class      operating short-circuit current breaking capacity (Ics)          at 400 V          at 500 V rated value          at 690 V rated value          till-load current (FLA) for 3-phase AC motor          at 480 V rated value          at 600 V rated value	0 0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA 3 kA 3 kA
<ul> <li>at DC maximum</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts</li> <li>number of NO contacts for auxiliary contacts</li> <li>number of NO contacts of instantaneous short-circuit trip unit for signaling contact</li> <li>number of CO contacts of the current-dependent overload release for signaling contact</li> <li>operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V</li> <li>Protective and monitoring functions</li> <li>trip class</li> <li>operating short-circuit current breaking capacity (Ics)</li></ul>	0 0 0 10 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA 3 kA 3 kA 0.75 hp
at DC maximum  Auxiliary circuit      number of NC contacts for auxiliary contacts      number of NO contacts for auxiliary contacts      number of NO contacts of instantaneous short-circuit trip unit for     signaling contact      number of CO contacts of the current-dependent overload     release for signaling contact      operational current of auxiliary contacts at AC-12 maximum     operational current of auxiliary contacts at DC-13 at 250 V  Protective and monitoring functions      trip class      operating short-circuit current breaking capacity (Ics)         at 400 V          at 500 V rated value          at 690 V rated value          UL/CSA ratings      full-load current (FLA) for 3-phase AC motor          at 480 V rated value          vielded mechanical performance [hp] for 3-phase AC motor          at 200/208 V rated value	0 0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA 3 kA 4 A 4 A 4 A 0.75 hp 0.75 hp 0.75 hp
at DC maximum  Auxiliary circuit  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of NO contacts of instantaneous short-circuit trip unit for signaling contact  number of CO contacts of the current-dependent overload release for signaling contact  operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V  Protective and monitoring functions  trip class  operating short-circuit current breaking capacity (Ics)      at 400 V      at 500 V rated value     at 690 V rated value  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor      at 480 V rated value     at 600 V rated value     at 600 V rated value     at 200/208 V rated value     at 220/230 V rated value	0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA 3 kA 4 A 4 A 4 A 4 A 2 hp
at DC maximum  Auxiliary circuit  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of NO contacts of instantaneous short-circuit trip unit for signaling contact  number of CO contacts of the current-dependent overload release for signaling contact  operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V  Protective and monitoring functions  trip class  operating short-circuit current breaking capacity (Ics)      at 400 V      at 500 V rated value      at 690 V rated value      tull-load current (FLA) for 3-phase AC motor      at 480 V rated value      yielded mechanical performance [hp] for 3-phase AC motor      at 220/230 V rated value      at 460/480 V rated value      at 675/600 V rated value	0 0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA 3 kA 4 A 4 A 4 A 0.75 hp 0.75 hp 0.75 hp
at DC maximum  Auxiliary circuit  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of NO contacts of instantaneous short-circuit trip unit for signaling contact  number of CO contacts of the current-dependent overload release for signaling contact  operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V  Protective and monitoring functions  trip class  operating short-circuit current breaking capacity (Ics)      at 400 V      at 500 V rated value      at 690 V rated value      tull-load current (FLA) for 3-phase AC motor      at 480 V rated value      at 600 V rated value      at 200/208 V rated value      at 200/208 V rated value      at 460/480 V rated value      at 460/480 V rated value      at 575/600 V rated value      bat 575/600 V rated value	0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA 3 kA 4 A 4 A 4 A 0.75 hp 0.75 hp 0.75 hp 2 hp 3 hp
at DC maximum  Auxiliary circuit  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of NO contacts of instantaneous short-circuit trip unit for signaling contact  number of CO contacts of the current-dependent overload release for signaling contact  operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V  Protective and monitoring functions  trip class  operating short-circuit current breaking capacity (Ics)      at 400 V      at 500 V rated value      at 690 V rated value      tull-load current (FLA) for 3-phase AC motor      at 480 V rated value      at 600 V rated value      at 600 V rated value      at 200/208 V rated value      at 220/230 V rated value      at 460/480 V rated value      at 460/480 V rated value      at 575/600 V rated value      bat 575/600 V rated value      bat 575/600 V rated value	0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA 3 kA 4 A 4 A 4 A 4 A 4 A Yes
at DC maximum  Auxiliary circuit  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of NO contacts of instantaneous short-circuit trip unit for signaling contact  number of CO contacts of the current-dependent overload release for signaling contact  operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V  Protective and monitoring functions  trip class  operating short-circuit current breaking capacity (Ics)      at 400 V      at 500 V rated value     at 690 V rated value  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor      at 480 V rated value      at 600 V rated value      at 600 V rated value      at 200/208 V rated value      at 460/480 V rated value      at 460/480 V rated value      at 460/480 V rated value      at 575/600 V rated value      bart-circuit protection  product function short circuit protection	0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA 3 kA 4 A 4 A 4 A 0.75 hp 0.75 hp 0.75 hp 2 hp 3 hp
at DC maximum  Auxiliary circuit  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of NO contacts of instantaneous short-circuit trip unit for signaling contact  number of CO contacts of the current-dependent overload release for signaling contact  operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V  Protective and monitoring functions  trip class  operating short-circuit current breaking capacity (Ics)      at 400 V      at 500 V rated value      at 690 V rated value      tull-load current (FLA) for 3-phase AC motor      at 480 V rated value      at 600 V rated value      at 600 V rated value      at 200/208 V rated value      at 220/230 V rated value      at 460/480 V rated value      at 460/480 V rated value      at 575/600 V rated value      bat 575/600 V rated value      bat 575/600 V rated value	0 0 0 10 A 0.27 A CLASS 10 and 20 adjustable 53 kA 3 kA 3 kA 4 A 4 A 4 A 4 A 4 A Yes

Installation/ mounting/ dimensions	
mounting position	any
recommended	any vertical, on horizontal standard DIN rail
fastening method	screw and snap-on mounting 170 mm
height	45 mm
width	
depth	165 mm
Connections/ Terminals	
product component removable terminal for main circuit	Yes
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	
<ul> <li>for main current circuit</li> </ul>	screw-type terminals
for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections for main contacts	
• solid	2x (1.5 6 mm²), 1x 10 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1.5 6 mm²)
type of connectable conductor cross-sections	
<ul> <li>for auxiliary contacts</li> </ul>	
— solid	0.5 4 mm², 2x (0.5 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm², 2x (0.5 1.5 mm²)
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 14)
Safety related data	
B10 value with high demand rate according to SN 31920	3 000 000
proportion of dangerous failures	
<ul> <li>with high demand rate according to SN 31920</li> </ul>	50 %
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe
Communication/ Protocol	
product function bus communication	Yes
protocol is supported	
AS-Interface protocol	No
IO-Link protocol	Yes
product function control circuit interface with IO link	Yes
IO-Link transfer rate	COM2 (38,4 kBaud)
point-to-point cycle time between master and IO-Link device minimum	2.5 ms
type of voltage supply via input/output link master	No
data volume	
<ul> <li>of the address range of the inputs with cyclical transfer total</li> </ul>	2 byte
<ul> <li>of the address range of the outputs with cyclical transfer total</li> </ul>	2 byte
Electromagnetic compatibility	
conducted interference	
• due to burst according to IEC 61000-4-4	4 kV main circuits, 2 kV auxiliary circuits, 2 kV IO-Link, 2 kV limit switches, 2 kV line hand-held device
• due to conductor-earth surge according to IEC 61000-4-5	4 kV main circuits, 0.5 kV auxiliary voltage with upstream overvoltage protection
<ul> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	2 kV main circuits, 0.5 kV auxiliary voltage with upstream overvoltage protection
<ul> <li>due to high-frequency radiation according to IEC 61000- 4-6</li> </ul>	0.15-80Mhz at 10V
field-based interference according to IEC 61000-4-3	80 3000 MHz at 10V/m
electrostatic discharge according to IEC 61000-4-2	8 kV
conducted HF interference emissions according to CISPR11	150 kHz 30 MHz Class A
field-bound HF interference emission according to CISPR11	30 1000 MHz Class A
Supply voltage	
Supply voltage required Auxiliary voltage	Yes
Display	
number of LEDs	3
display version as status display of the input/output link device	green/red dual LED
	•

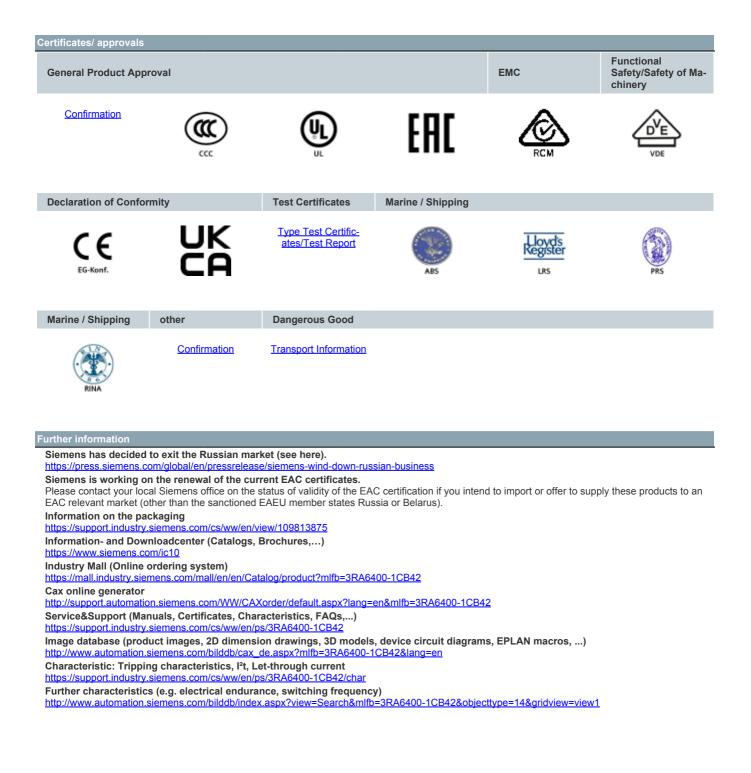

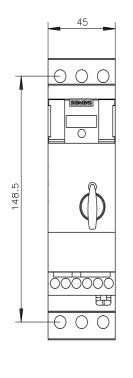

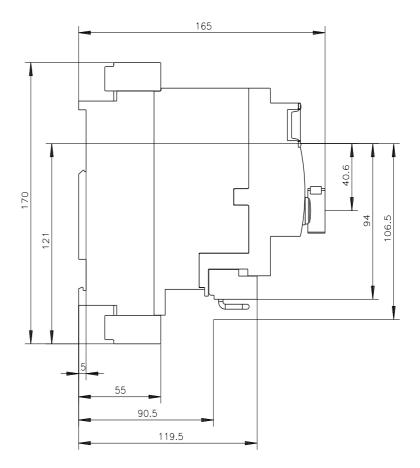

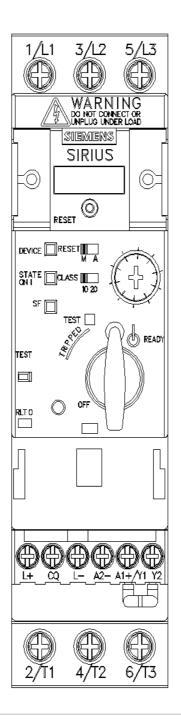

last modified:

8/7/2023 🖸

8/18/2023

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RA64001CB42