## **SIEMENS**

Data sheet 3RB3026-1NE0



Overload relay 0.32...1.25 A Electronic For motor protection Size S0, Class 10E Contactor mounting Main circuit: Spring-type terminal Auxiliary circuit: Spring-type terminal Manual-Automatic-Reset

product brand name	SIRIUS
product designation	solid-state overload relay
product type designation	3RB3
General technical data	
size of overload relay	SO
size of contactor can be combined company-specific	S0
power loss [W] for rated value of the current at AC in hot operating state	0.1 W
• per pole	0.03 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	300 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	300 V
<ul> <li>between main and auxiliary circuit</li> </ul>	600 V
between main and auxiliary circuit	690 V
shock resistance	15g / 11 ms
• according to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 9g / 11 ms
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s <sup>2</sup> ; 10 cycles
thermal current	1.25 A
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-40 +80 °C
during transport	-40 +80 °C
temperature compensation	-25 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	0.32 1.25 A
operating voltage	
rated value	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz

	1054
operational current rated value	1.25 A
operational current at AC-3e at 400 V rated value	1.25 A
operating power	0.40
• for 3-phase motors at 400 V at 50 Hz	0.12 0.37 kW
• for AC motors at 500 V at 50 Hz	0.12 0.55 kW
for AC motors at 690 V at 50 Hz	0.18 0.75 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
● at 24 V	4 A
• at 110 V	4 A
● at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A
• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A
Protective and monitoring functions	
trip class	CLASS 10E
design of the overload release	electronic
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
<ul> <li>at 480 V rated value</li> </ul>	1.25 A
at 600 V rated value	1.25 A
contact rating of auxiliary contacts according to UL	B600 / R300
Short-circuit protection	
design of the fuse link	
<ul> <li>for short-circuit protection of the main circuit</li> </ul>	
<ul> <li>— with type of coordination 1 required</li> </ul>	gG: 35 A, RK5: 6 A
<ul> <li>— with type of assignment 2 required</li> </ul>	gG: 6 A
• for short-circuit protection of the auxiliary switch required	fuse gG: 6 A
Installation/ mounting/ dimensions	
mounting position	any
fastening method	Contactor mounting
height	109 mm
width	45 mm
depth	85 mm
Connections/ Terminals	
product component removable terminal for auxiliary and	Yes
control circuit	
type of electrical connection	
for main current circuit	spring-loaded terminals
for auxiliary and control circuit	spring-loaded terminals
arrangement of electrical connectors for main current	Top and bottom
circuit	
type of connectable conductor cross-sections for main contacts	4(440
<ul><li>solid</li></ul>	1x (1 10 mm²)
	4 402
• stranded	1x 10 mm²
<ul><li>stranded</li><li>solid or stranded</li></ul>	1x (1 10 mm²)
<ul><li> stranded</li><li> solid or stranded</li><li> finely stranded with core end processing</li></ul>	1x (1 10 mm²) 1x (1 6 mm²)
<ul> <li>stranded</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> </ul>	1x (1 10 mm²)
<ul><li> stranded</li><li> solid or stranded</li><li> finely stranded with core end processing</li></ul>	1x (1 10 mm²) 1x (1 6 mm²)

2x (0.25 1.5 mm²)
2x (0,25 1,5 mm²)
2x (0.25 1.5 mm²)
2x (0.25 1.5 mm²)
1x (24 16), 2x (24 16)
Diameter 5 to 6 mm
Pozidriv PZ 2
IP20
finger-safe, for vertical contact from the front
No
2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
2 kV (line to earth) corresponds to degree of severity 3
1 kV (line to line) corresponds to degree of severity 3
10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz
10 V/m
6 kV contact discharge / 8 kV air discharge
Slide switch



**General Product Approval** 

Confirmation









**EMC** 

For use in hazardous locations

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping







Type Test Certificates/Test Report

Special Test Certificate



## Marine / Shipping





LRS







Confirmation

other

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3026-1NE0

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RB3026-1NE0}$ 


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RB3026-1NE0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


 $\underline{\text{http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RB3026-1NE0\&lang=en}}$ 

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3026-1NE0&objecttype=14&gridview=view1



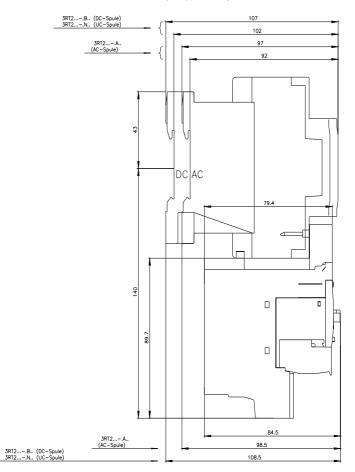

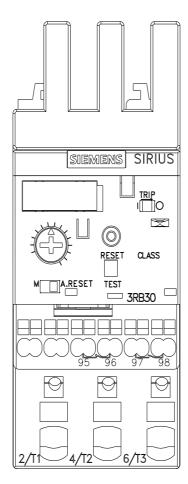

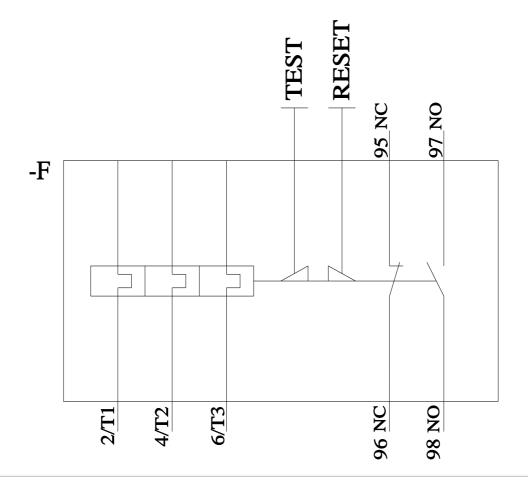

last modified: 2/9/2022 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RB30261NE0