SIEMENS

Data sheet

3RB3026-1SE0




Overload relay 3...12 A Electronic For motor protection Size S0, Class 10E Contactor mounting Main circuit: Spring-type terminal Auxiliary circuit: Spring-type terminal Manual-Automatic-Reset


product brand name	SIRIUS	
product designation	solid-state overload relay	
product type designation	3RB3	
General technical data		
size of overload relay	S0	
size of contactor can be combined company-specific	S0	
power loss [W] for rated value of the current at AC in hot operating state	0.6 W	
• per pole	0.2 W	
insulation voltage with degree of pollution 3 at AC rated value	690 V	
surge voltage resistance rated value	6 kV	
maximum permissible voltage for protective separation in networks with grounded star point		
 between auxiliary and auxiliary circuit 	300 V	
 between auxiliary and auxiliary circuit 	300 V	
 between main and auxiliary circuit 	600 V	
 between main and auxiliary circuit 	690 V	
shock resistance	15g / 11 ms	
 according to IEC 60068-2-27 	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 9g / 11 ms	
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s²; 10 cycles	
thermal current	12 A	
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]	
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001	
reference code according to IEC 81346-2	F	
Substance Prohibitance (Date)	10/01/2009	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
during operation	-25 +60 °C	
during storage	-40 +80 °C	
during transport	-40 +80 °C	
temperature compensation	-25 +60 °C	
relative humidity during operation	10 95 %	
Main circuit		
number of poles for main current circuit	3	
adjustable current response value current of the current- dependent overload release	3 12 A	
operating voltage		
rated value	690 V	
• at AC-3e rated value maximum	690 V	
operating frequency rated value	50 60 Hz	


operational current rated value	12 A
operational current at AC-3e at 400 V rated value	12 A
operating power	
 for 3-phase motors at 400 V at 50 Hz 	1.5 5.5 kW
• for AC motors at 500 V at 50 Hz	1.5 5.5 kW
• for AC motors at 690 V at 50 Hz	2.2 7.5 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A
● at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A
Protective and monitoring functions	
trip class	CLASS 10E
design of the overload release	electronic
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	12 A
at 600 V rated value	12 A
contact rating of auxiliary contacts according to UL	B600 / R300
Short-circuit protection	
design of the fuse link	
for short-circuit protection of the main circuit	
— with type of coordination 1 required	gG: 63 A, RK5: 45 A
— with type of assignment 2 required	gG: 50 A, J: 45 A
 for short-circuit protection of the auxiliary switch required 	fuse gG: 6 A
Installation/ mounting/ dimensions	
mounting position	any
fastening method	Contactor mounting
height	109 mm
width	45 mm
depth	85 mm
Connections/ Terminals	
product component removable terminal for auxiliary and	Yes
control circuit	
type of electrical connection	enring loaded terminals
for main current circuit for auxiliany and control circuit	spring-loaded terminals
for auxiliary and control circuit	spring-loaded terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections for main contacts	
• solid	1x (1 10 mm ²)
stranded	1x 10 mm ²
solid or stranded	1x (1 10 mm²)
 finely stranded with core end processing 	1x (1 6 mm²)
 finely stranded without core end processing 	1x (1 6 mm²)
type of connectable conductor cross-sections	
 for auxiliary contacts 	


	— solid					
 - firely stranded with core and processing - firely stranded without core and processing 2x (0.25 15 mm?) 2x (0.24 16) design of acrewidriver tip Diameter 5 to 6 mm size of the seconding to IEC 60529 IP20 Index seconding to IEC 61000-4.4 Index laccording to IEC 61000-4.3 Index laccording to IEC 61000-4.3 Inter seconding to IEC 61000-4.5 Inter seconding to IEC 61000-4.5 Inter seconding to IEC 61000-4.5 <li< td=""><td>Solid</td><td>2x (0.25 1.5 mm²)</td><td></td></li<>	Solid	2x (0.25 1.5 mm²)				
	— solid or stranded	2x (0,25 1,5 mm²)				
• tor AWG cables for auxiliary contacts 1x (24 16) 2x (24 16) design of acroweriver shaft Diameter 5 to 6 mm size of the seconding to IEC 60529 Inger-safe, for vertical contact from the front continuetation / Protocol Inger-safe, for vertical contact from the front Communication / Protocol Inger-safe, for vertical contact from the front Communication / Protocol No Electromagnetic compatibility 0 e. due to busit according to IEC 61000-4-3 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 e. due to busit according to IEC 61000-4-3 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 e. due to high-frequency radiation according to IEC 61000-4-3 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz electrostatic discharge according to IEC 61000-4-3 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz electrostatic discharge according to IEC 61000-4-3 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz electrostatic discharge according to IEC 61000-4-3 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz electrostatic discharge according to IEC 61000-4-3 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz electrostatic discharge according to IEC 61000-4 EMC<	 finely stranded with core end processing 	2x (0.25 1.5 mm²)				
design of screwdriver shaft Diameter 5 to 6 mm size of the screwdriver tp Poddiv/ PZ 2 Safety related data Protection class IP on the front according to IEC 60529 IP20 touch protection class IP on the front according to IEC 60529 IP20 touch protection class IP on the front according to IEC 60529 IP20 conducted compatibility Conductor conductor earth surge according to IEC 61000-45 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 • due to burst according to IEC 61000-45 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 1 kV (ine to earth) corresponds to degree of severity 3 • due to conductor-earth surge according to IEC 61000-45 1 kV (ine to line) corresponds to degree of severity 3 1 kV (ine to line) corresponds to degree of severity 3 • due to high-frequency radiation according to IEC 61000-42 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz field-based interference according to IEC 61000-43 10 V/m electrostatic discharge according to IEC 61000-42 6 kV contact discharge / 8 kV air discharge Display display version for switching status Silde switch Confirmation Confirmation EMC Origina for switching status Silde switch EMC Contine coalision Declaration of Conformily Test Certificates Marine / Shipping E	 finely stranded without core end processing 	2x (0.25 1.5 mm²)				
size of the screwdriver tip Poddriv PZ 2 Safety related data protection class IP on the front according to IEC 60529 finger-safe, for vertical contact from the front Communication/Protocol Type of voltage supply via input/output link master No Electromagnetic compatibility Conducted interference	 for AWG cables for auxiliary contacts 	1x (24 16), 2x (24 16)				
Safety related data protection class IP on the front according to IEC 60529 IP20 Ingensate, for vertical contact from the front Communication/ Protocol Type of voltage supply via input/output link master Electromagnetic compatibility conducted interference • use to output/contron the surge according to IEC 61000-4.4 • use to conductor-conductor surge according to IEC 61000-4.5 • use to conductor-conductor surge according to IEC 61000-4.5 • use to conductor-conductor surge according to IEC 61000-4.5 • use to conductor-conductor surge according to IEC 61000-4.2 • use to conductor-conductor surge according to IEC 61000-4.2 • use to conductor-conductor surge according to IEC 61000-4.2 • use to conductor-conductor surge according to IEC 61000-4.2 • decto high-frequency radiation according to IEC 61000-4.2 • decto angle to IEC 61000-4.2	design of screwdriver shaft	Diameter 5 to 6 mm				
protection class IP on the front according to IEC 60529 IP20 tuch protection on the front according to IEC 60529 Inger-safe, for vertical contact from the front Communication Protocol No Electromagnetic compatibility Inger-safe, for vertical contact from the front conducted interference us to burst according to IEC 6100-4-4 us to conductor-acrit surge according to IEC 6100-4-5 us to conductor-conductor surge according to IEC 6100-4-3 electrostatic discharge according to IEC 6100-4-3 us to high-frequency radiation according to IEC 6100-4-3 us to high-frequency radiation according to IEC 61000-4-3 us to for switching status Stilde switch to Ir frequency radiation according to IEC 61000-4-2 U/m dectrostatic discharge according to IEC 61000-4-3 U/m dectrostatic discharge according to IEC 61000-4-2 U/m dectrostatic discharge according to IEC 61000-4-2 U/m dectrostatic algebravials Stilde switch Confirmation Confirmation EMC Every according to IEC 61000-4-1 Exet Certificates Every accord	size of the screwdriver tip	Pozidriv PZ 2				
touch protection on the front according to IEC 60529 Inger-safe, for vertical contact from the front Communication/ Protocol No Electromagnetic compatibility Conducted interference • due to burst according to IEC 61000-4-3 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 • due to bigh-frequency radiation according to IEC 61000-4-5 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 field-based interference 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 field-based interference according to IEC 61000-4-3 10 V Im frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz field-based interference according to IEC 61000-4-2 10 V/m electrostatic discharge according to IEC 61000-4-2 10 V/m electrostatic discharge according to IEC 61000-4-2 10 V/m electrostatic discharge according to IEC 61000-4-2 Ewc field-based interference Ewc confirmation Ewc	Safety related data					
Communication/ Protocol No Electromagnetic compatibility Include and the second of the se	protection class IP on the front according to IEC 60529	IP20				
type of voltage supply via input/output link master No Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-canth surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-5 • due to burst according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-3 effetd-based interference according	touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front				
Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to ingh-frequency radiation according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to inductor-senductor seture according to IEC 61000-4-3 • due to inductor-senductor seture according to IEC 61000-4-3 • due to inductor-seture according to IEC 61000-4-2 • due to inductor seture according to IEC 61000-4-2 • due to inductor seture according to IEC 61000-4-3 • due to inductor seture according to IEC 61000-4-3 • due to inductor seture according to IEC 61000-4-3 • due to inductor seture according to IEC 61000-4-3 • due to inductor seture according to IEC 61000-4-3 • due to inductor seture according to IEC 61000-4-3 • due to inductor seture according to IEC 61000-4-3 • due to inductor seture according to IEC 61000-4-3 • due to inductor seture according	Communication/ Protocol					
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to high-frequency radiation according to IEC 61000-4-3 • due to according to IEC 61000-4-3 • eterth contract discharge / 8 kV air discharge • Display display version for switching status Slide switch Confirmation Confirmation Confirmation Confirmation For use in hazard- ous locations Declaration of Conformity Exc Exc Kent. Confirmation Special Test Certific:	type of voltage supply via input/output link master	No				
 4 ue to burst according to IEC 61000-4-5 4 due to conductor-earth surge according to IEC 61000-4-5 4 due to individuation according to IEC 61000-4-5 4 due to high-frequency radiation according to IEC 61000-4-3 4 due to high-frequency radiation according to IEC 61000-4-3 4 due to rost ductor-conductor surge according to IEC 61000-4-3 4 due to high-frequency radiation according to IEC 61000-4-3 4 due to transporte to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 3 4 V (ine to line) corresponds to degree of severity 4 5 V contact discharge / 8 V air discharge 5 V contact discharge / 8 V air discharge 5 V contact discharge / 8 V contact discharge / 8 V contact discharge 5 V contact discharge	Electromagnetic compatibility					
 4 ue to conductor-centri surge according to IEC 61000-4.5 4 ue to to conductor-conductor surge according to IEC 61000-4.5 4 ue to high-frequency radiation according to IEC 61000-4.3 4 uo to high-frequency radiation according to IEC 61000-4.3 4 uo to high-frequency radiation according to IEC 61000-4.3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to high-frequency radiation according to IEC 61000-4.3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 3 4 uo to responde to degree of severity 4 4 uo to responde to degree of severity 4 4 uo to responde to degree of severity 4 4 uo to responde to degree of severity 4 4 uo to responde to degree of severity 4 4 uo to responde to degree of severity 4 4 uo to responde to degree of severity 4 4 uo to responde to degree of severity 4 4 uo to responde to degree of severity 4 4 uo to responde to degreee	conducted interference					
 e due to conductor-conductor surge according to IEC from -4.5 e due to high-frequency radiation according to IEC 61000-4.3 field-based interference according to IEC 61000-4.3 in V (ine to line) corresponds to degree of severity 3 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz field-based interference according to IEC 61000-4.3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (ine to line) corresponds to degree of severity 3 in V (in trequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz in V (in trequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz in V (in trequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz in V (in trequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz in V (in trequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz in V (in trequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz in V (in trequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz in V (in trequency range 0.15 to 80 MHz, modulation 80 % AM wit	 due to burst according to IEC 61000-4-4 	2 kV (power ports), 1 kV (signal ports) corresponds to de	egree of severity 3			
61000-4-5 - 4ue to high-frequency radiation according to IEC 61000-4-3 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz field-based interference according to IEC 61000-4-3 10 V/m electrostatic discharge according to IEC 61000-4-2 0 KV contact discharge / 8 kV air discharge Display display version for switching status Slide switch Cortificates/ approvals EMC General Product Approval EMC For use in hazard- ous locations Declaration of Conformity Test Certificates Marine / Shipping Image: State St	 due to conductor-earth surge according to IEC 61000-4-5 	2 kV (line to earth) corresponds to degree of severity 3				
$\begin{array}{c c c c c c c c c c c c c c c c c c c $		1 kV (line to line) corresponds to degree of severity 3				
4-6 10 V/m field-based interference according to IEC 61000-4-3 10 V/m electrostic discharge / 8 kV air discharge 6 kV contact discharge / 8 kV air discharge Display display version for switching status Slide switch Confirmation EMC Effect Declaration of Conformity Test Certificates Marine / Shipping Effect Effect Effect Effect Effect Effect Effect Effect Marine / Shipping Effect Effect Effect Effect Effect Effect Effect Effect Effect Effect Effect Effect Effect Effect Effect Effect Effect Effect						
electrostatic discharge according to IEC 61000-4-2 6 kV contact discharge / 8 kV air discharge Display display version for switching status Slide switch Certificates/ approvals EMC General Product Approval Confirmation EMC For use in hazard- ous locations Declaration of Conformity Test Certificates Marine / Shipping General Product Approval ECC Special Test Certificates Marine / Shipping General Product Approval ECC Special Test Certificates Marine / Shipping Marine / Shipping ECC Special Test Certificates Type Test Certificates Marine / Shipping ECC Special Test Certificates Type Test Certificates Marine / Shipping Special Test Certificates Type Test Certificates Special Test Report Marine / Shipping Special Test Certificates Type Test Certificates Special Test Report Special Test Report Special Test Shipping Special Test Certificates Test Certificates Test Certificates Special Test Report Special Test Report Special Test Shipping Spe		10 V in frequency range 0.15 to 80 MHz, modulation 80	% AM with 1 kHz			
Display display version for switching status Slide switch Certificates/ approvals EMC General Product Approval EMC Confirmation Openation EMC Openation of Conformity Test Certificates Marine / Shipping Openation of Conformity Test Certificates Marine / Shipping Openation of Conformity Special Test Certificates Marine / Shipping Openation Confirmation Special Test Certificates Marine / Shipping Marine / Shipping Openation Special Test Certificates Type Test Certificates Openation Marine / Shipping Openation Special Test Certificates Type Test Certificates Openation Marine / Shipping Openation Special Test Certificates Type Test Certificates Openation Marine / Shipping Openation Openation Openation Openation Openation Marine / Shipping Openation Openation Openation Openation Openation Marine / Shipping Openation Openation Openation Openation Openation Marine / Shipping Openation	field-based interference according to IEC 61000-4-3	10 V/m				
display version for switching status Slide switch Cortificates/ approvals EMC General Product Approval Emc Marine / Shipping Declaration of Conformity Test Certificates Marine / Shipping General Product State Emc General Product Certificates Marine / Shipping Emc Special Test Certificates Type Test Certificates (ates/Test Report) Marine / Shipping Marine / Shipping Emc General Product (ates/Test Report) Marine / Shipping Marine / Shipping Emc General Product (ates/Test Report) General Product (ates/Test Report) Confirmation	electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge				
Certificates/ approval EMC General Product Approval Confirmation EMC General Product Approval Confirmation EMC General Product Approval EMC Emc General Product Approval Emc Emc General Product Approval Emc Emc Confirmation Emc Emc Emc For use in hazard- ous locations Declaration of Conformity Test Certificates Marine / Shipping Emc Emc Emc Emc Emc Emc Emc Emc Emc Emc Emc Emc Emc Emc Emc Marine / Shipping Marine / Shipping Emc Emc Emc Emc Emc Marine / Shipping Emc Emc Emc Emc Marine / Shipping Emc Special Test Certificates Type Test Certificates Emc Marine / Shipping Emc Emc Emc Emc Emc Marine / Shipping Emc Emc Emc Emc Emc Marine / Shipping <td>Display</td> <td></td> <td></td>	Display					
EMC General Product Approval Confirmation EMC Sec. Confirmation EMC Emc Emc For use in hazard- ous locations Declaration of Conformity Test Certificates Marine / Shipping Special Test Certific- ate Type Test Certific- ate Type Test Certific- ates/Test Report Special Test Certific- ates/Test Report Other Marine / Shipping Emc Emc Emc Emc Emc Marine / Shipping Emc Emc Emc Emc Emc Marine / Shipping Emc Emc Emc Emc Emc Marine / Shipping Emc Emc Marine / Shipping Marine / Shipping Emc Marine / Shipping Emc Emc Emc Emc Emc E	display version for switching status	Slide switch				
KonstructionConfirmationConfirmationImage: ConfirmationImage: ConfirmationImage: ConfirmationFor use in hazard- our locationsDeclaration of ConformityTest CertificatesMarine / ShippingImage: ConfirmationImage: ConfirmationSpecial Test CertificatesMarine / ShippingImage: ConfirmationImage: ConfirmationSpecial Test CertificatesMarine / ShippingImage: ConfirmationImage: ConfirmationSpecial Test CertificatesImage: ConfirmationImage: Confirmation<	Certificates/ approvals					
$\begin{array}{c} \overbrace{CC}\\ \overbrace{CC} $	General Product Approval		EMC			
Declaration of Conformity Test Certificates Marine / Shipping Warine / Shipping CCC CCC Special Test Certificates Type Test Certificates Composition Marine / Shipping Marine / Shipping Special Test Certificates Type Test Certificates Composition Composition Marine / Shipping Marine / Shipping Special Test Certificates Type Test Certificates Confirmation Marine / Shipping Marine / Shipping Operation Operation Operation Operation Marine / Shipping Marine / Shipping Special Test Certificates Type Test Certificates Operation Operation Marine / Shipping Marine / Shipping Special Test Certificates Type Test Certificates Operation Operation Marine / Shipping Marine / Shipping Operation Operation Operation Operation Marine / Shipping Marine / Shipping Operation Operation Operation Operation Marine / Shipping Marine / Shipping Operation Operation Operation Operation Marine / Shipping Marine / Shipping Marine / Shipping Operation	CSA CCC		RCM			
Image: Second secon	Declaration of Conformity	Test Certificates	Marine / Shipping			
EUREAU VERITAS			ABS			
BUREAU VERITAS	Marine / Shipping		other			
BUREAU VERITAS		TTA MONTO A	Confirmation			
Further information	LICYCIS Register URS VERITAS					
	Further information					
Siemens has decided to exit the Russian market (see here).						
https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business	https://press.siemens.com/global/en/pressrelease/siemens-wind-do					
Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an			ly these products to ap			
EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).						
Information on the packaging						
https://support.industry.siemens.com/cs/ww/en/view/109813875						
https://www.siemens.com/ic10	Information, and Downloadcontor (Catalogo, Brochuros,					
Industry Mall (Online ordering system)	Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10	Industry Mall (Online ordering system)				
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3026-1SE0	https://www.siemens.com/ic10 Industry Mall (Online ordering system)					
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3026-1SE0	https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=	=3RB3026-1SE0				
Service&Support (Manuals, Certificates, Characteristics, FAQs,)	https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb= Cax online generator					
	https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb= Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx Service&Support (Manuals, Certificates, Characteristics, FAQs)	?lang=en&mlfb=3RB3026-1SE0				
<u>https://support.industry.siemens.com/cs/ww/en/ps/3RB3026-1SE0</u> Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)	https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb= Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx Service&Support (Manuals, Certificates, Characteristics, FAQs, https://support.industry.siemens.com/cs/ww/en/ps/3RB3026-1SE0	<u>?lang=en&mlfb=3RB3026-1SE0</u> ,)				

Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RB3026-1SE0/char Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3026-1SE0&objecttype=14&gridview=view1

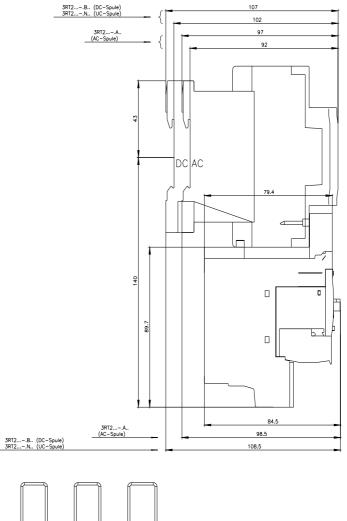



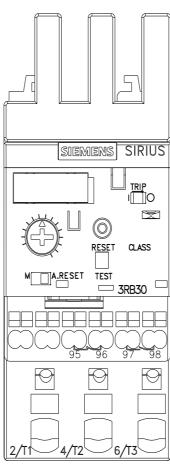

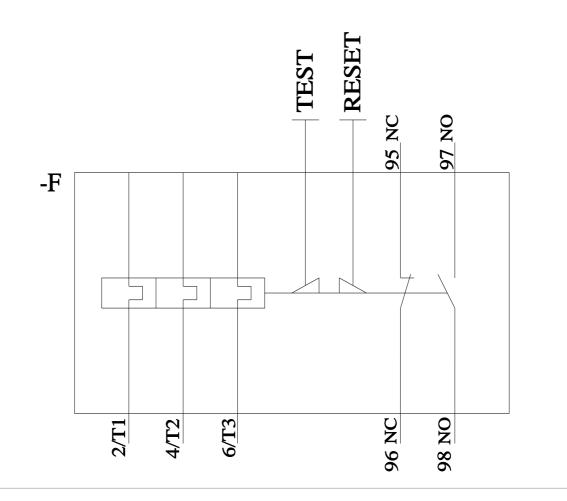

last modified:

2/9/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RB30261SE0