SIEMENS

Data sheet

3RB3143-4UD0



Overload relay 12.5...50 A Electronic For motor protection Size S3, Class 5E...30E Contactor mounting Main circuit: Screw Auxiliary circuit: Spring-type terminal Manual-Automatic-Reset

product brand name	SIRIUS			
product designation	solid-state overload relay			
product type designation	3RB3			
General technical data				
size of overload relay	S3			
size of contactor can be combined company-specific	S3			
power loss [W] for rated value of the current at AC in hot operating state	0.9 W			
• per pole	0.3 W			
insulation voltage with degree of pollution 3 at AC rated value	1 000 V			
surge voltage resistance rated value	8 kV			
maximum permissible voltage for protective separation in networks with grounded star point				
 between auxiliary and auxiliary circuit 	300 V			
 between auxiliary and auxiliary circuit 	300 V			
 between main and auxiliary circuit 	600 V			
 between main and auxiliary circuit 	690 V			
shock resistance	8g / 11 ms			
according to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 8g / 11 ms			
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s ² ; 10 cycles			
thermal current	50 A			
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]			
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001			
reference code according to IEC 81346-2	F			
Substance Prohibitance (Date)	03/01/2017			
Ambient conditions				
installation altitude at height above sea level maximum	2 000 m			
ambient temperature				
during operation	-25 +60 °C			
during storage	-40 +80 °C			
 during transport 	-40 +80 °C			
temperature compensation	-25 +60 °C			
relative humidity during operation	10 95 %			
Main circuit				
number of poles for main current circuit	3			
adjustable current response value current of the current- dependent overload release	12.5 50 A			
operating voltage				
rated value	1 000 V			
 for remote-reset function at DC 	24 V			
 at AC-3e rated value maximum 	1 000 V			

operating frequency rated value 50 60 Hz operational current rated value 50 A operational current at AC-3e at 400 V rated value 50 A operating power 50 A • for 3-phase motors at 400 V at 50 Hz 7.5 22 kW • for AC motors at 500 V at 50 Hz 11 30 kW	
operational current at AC-3e at 400 V rated value 50 A operating power 6 for 3-phase motors at 400 V at 50 Hz 7.5 22 kW	
operating power • for 3-phase motors at 400 V at 50 Hz 7.5 22 kW	
• for 3-phase motors at 400 V at 50 Hz 7.5 22 kW	
for AC motors at 690 V at 50 Hz 11 45 kW	
Auxiliary circuit	
design of the auxiliary switch integrated	
number of NC contacts for auxiliary contacts 1	
note for contactor disconnection	
number of NO contacts for auxiliary contacts 1	
note for message "tripped"	
number of CO contacts for auxiliary contacts 0	
operational current of auxiliary contacts at AC-15	
• at 24 V 4A	
• at 110 V 4 A	
• at 120 V 4 A	
• at 125 V 4 A	
• at 230 V 3 A	
operational current of auxiliary contacts at DC-13	
• at 24 V 2 A	
• at 60 V 0.55 A	
• at 110 V 0.3 A	
• at 125 V 0.3 A	
• at 220 V 0.11 A	
Protective and monitoring functions	
trip class CLASS 5E, 10E, 20E and 30E adjustable	
design of the overload release electronic	
response value current of the grounding protection minimum 0.75 x IMotor	
response time of the grounding protection in settled state 1 000 ms	
operating range of the grounding protection relating to current set value	
minimum IMotor > lower current setting value	
maximum IMotor < upper current setting value x 3.5	
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value 50 A	
at 600 V rated value 50 A	
contact rating of auxiliary contacts according to UL B600 / R300	
Short-circuit protection	
design of the fuse link	
for short-circuit protection of the main circuit	
- with type of coordination 1 required gG: 200 A	
 with type of assignment 2 required gG: 200 A for short-circuit protection of the auxiliary switch required fuse gG: 6 A 	
• for short-circuit protection of the auxiliary switch required in use g. 6 A	
mounting position any	
fastening method Contactor mounting	
height 106 mm	
width 70 mm	
depth 124 mm	
Connections/ Terminals	
product component removable terminal for auxiliary and Yes control circuit	
type of electrical connection	
for main current circuit screw-type terminals	
for auxiliary and control circuit spring-loaded terminals	
arrangement of electrical connectors for main current Top and bottom circuit	
type of connectable conductor cross-sections for main contacts	

			0 (0	5 40 2				
• solid				2x (2.5 16 mm ²)				
 stranded 			$2x 16 \text{ mm}^2$ 1x (2.5 70 mm²) 2x (2.5 50 mm²)					
 solid or stranded 				5 70 mm²), 2x (2,5 5				
finely stranded with core end processing type of connectable conductor cross-sections				1x (2,5 50 mm²), 2x (2,5 35 mm²)				
 for auxiliary cont 	acts		0 (0	05 4 5				
— solid			2x (0.25 1.5 mm ²)					
— solid or stra			2x (0,25 1,5 mm ²)					
	ded with core end processing		2x (0.25 1.5 mm ²)					
	ded without core end processi	ng	2x (0.25 1.5 mm ²)					
				2x (24 16)				
	tightening torque				4.5 6 N·m			
design of screwdriver	for main contacts with screw-type terminals							
			Diameter 5 to 6 mm					
size of the screwdrive	-		POZIU	Pozidriv PZ 2				
 for main contacts 	of the connection screw		MG					
	5		IVIO	M6				
Safety related data	the front according to IEC 6	30529	IP20					
-			IP20 finger-safe, for vertical contact from the front					
Communication/ Protoc	he front according to IEC 60	JZJ	inger					
			No					
Electromagnetic compa	y via input/output link maste		INU					
conducted interference			_					
			2 1/1	(now or norte) = 1 k / (sign)	al parts) corresponds to de	aroo of covority 2		
	 e due to burst according to IEC 61000-4-4 e due to conductor-earth surge according to IEC 61000-4-5 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 2 kV (line to earth) corresponds to degree of severity 3 				gree of sevenity 5			
				2 kV (line to earth) corresponds to degree of severity 3				
61000-4-5	due to conductor-conductor surge according to IEC 1 kV (line to line) corresponds to degree of severity 3 61000-4-5							
 due to high-frequ 	• due to high-frequency radiation according to IEC 61000- 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz							
4-6								
field-based interference according to IEC 61000-4-3			10 V/m					
electrostatic discharge according to IEC 61000-4-2			6 kV contact discharge / 8 kV air discharge					
Display								
display version for swite	ching status		Slide switch					
Certificates/ approvals			_					
General Product App	roval					EMC		
(SP)	(CCC)	<u>Confirmation</u>	ם		EAC	RCM		
For use in hazard- ous locations	Declaration of Conformity	1		Test Certificates		Marine / Shipping		
K ATEX	UK CA	CE EG-Konf.		<u>Type Test Certific-</u> ates/Test Report	Special Test Certific- ate	ABS		
Marine / Chinning					other			
Marine / Shipping					other			
Lloyd's Register urs	PRS			DIVUGLEDING	<u>Confirmation</u>			
Further information								

Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an

EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). **Information on the packaging**

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10 Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3143-4UD0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3143-4UD0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RB3143-4UD0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3143-4UD0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RB3143-4UD0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3143-4UD0&objecttype=14&gridview=view1

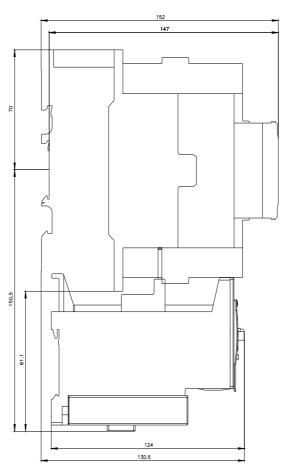



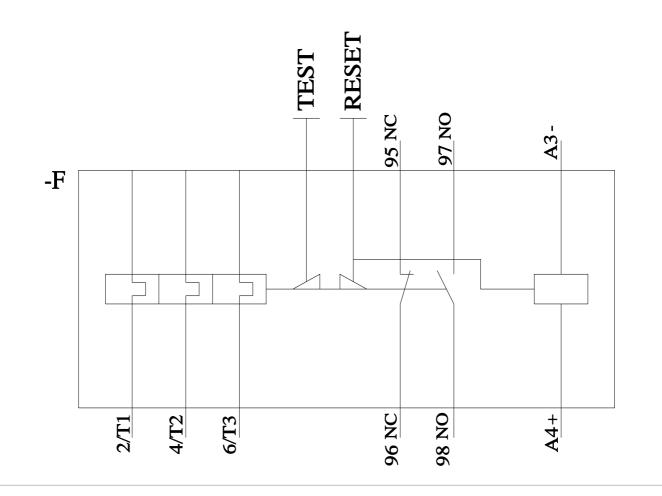

last modified:

2/9/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RB31434UD0