## **SIEMENS**

Data sheet 3RF2120-1AA02



Semiconductor relay, 1-phase 3RF2 Width 22.5 mm, 20 A 24-230 V / 24 V DC screw terminal

product brand name	SIRIUS
product designation	solid-state relay
design of the product	single-phase
product type designation	3RF21
manufacturer's article number	
<ul><li>_1 of the accessories that can be ordered</li></ul>	3RF2900-3PA88
<ul><li>_2 of the accessories that can be ordered</li></ul>	3RF2920-0HA13
<ul><li>_3 of the accessories that can be ordered</li></ul>	3RF2900-0EA18
<ul><li>_4 of the accessories that can be ordered</li></ul>	3RF2920-0GA13
<ul> <li>_5 of the accessories that can be ordered</li> </ul>	3RF2920-0FA08
product designation	
<ul><li>_1 of the accessories that can be ordered</li></ul>	terminal cover
<ul><li>_2 of the accessories that can be ordered</li></ul>	power regulator
<ul><li>_3 of the accessories that can be ordered</li></ul>	converter
<ul><li>_4 of the accessories that can be ordered</li></ul>	load monitoring
<ul><li>_5 of the accessories that can be ordered</li></ul>	load monitoring, basis
General technical data	
product function	zero-point switching
power loss [V·A] maximum	28.6 VA
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	28.6 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	28.6 W
without load current share typical	0.4 W
insulation voltage rated value	600 V
type of voltage of the control supply voltage	DC
surge voltage resistance of main circuit rated value	6 kV
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to EN 61346-2	Q
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/28/2009
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
operating voltage at AC	
at 50 Hz rated value	24 230 V
at 60 Hz rated value	24 230 V
operating frequency rated value	50 60 Hz
relative symmetrical tolerance of the operating frequency	10 %

operating range relative to the operating voltage at AC			
● at 50 Hz	20 253 V		
● at 60 Hz	20 253 V		
operational current			
<ul> <li>at AC-51 rated value</li> </ul>	20 A		
<ul> <li>according to UL 508 rated value</li> </ul>	20 A		
ampacity maximum	20 A		
operational current minimum	100 mA		
rate of voltage rise at the thyristor for main contacts maximum permissible	500 V/μs		
blocking voltage at the thyristor for main contacts maximum permissible	800 V		
reverse current of the thyristor	10 mA		
derating temperature	40 °C		
surge current resistance rated value	200 A		
I2t value maximum	200 A²-s		
Control circuit/ Control			
type of voltage of the control supply voltage	DC		
control supply voltage 1			
at DC rated value	30 V		
• at DC	15 24 V		
control supply voltage			
at DC initial value for signal <1> detection	15 V		
at DC filliar value for signal < 1> detection     at DC full-scale value for signal < 0> recognition	5 V		
control current at minimum control supply voltage			
• at DC	13 mA		
control current at DC rated value	15 mA		
ON-delay time	1 ms; additionally max, one half-wave		
OFF-delay time	1 ms; additionally max. one half-wave		
Auxiliary circuit	0		
number of NC contacts for auxiliary contacts	0		
number of NO contacts for auxiliary contacts	0		
number of CO contacts for auxiliary contacts	0		
Installation/ mounting/ dimensions			
fastening method	screw fixing		
side-by-side mounting	Yes		
design of the thread of the screw for securing the equipment	M4		
tightening torque of fixing screw maximum	1.5 N·m		
tightening torque [lbf·in] of fixing screw maximum	13 lbf·in		
height	85 mm		
width	22.5 mm		
depth	48 mm		
Connections/ Terminals			
type of electrical connection			
for main current circuit	screw-type terminals		
for auxiliary and control circuit	screw-type terminals		
type of connectable conductor cross-sections			
<ul> <li>for main contacts</li> </ul>			
— solid	2x (1.5 2.5 mm²), 2x (2.5 6 mm²)		
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
for AWG cables for main contacts	2x (14 10)		
connectable conductor cross-section for main contacts			
<ul> <li>solid or stranded</li> </ul>	1.5 6 mm²		
<ul> <li>finely stranded with core end processing</li> </ul>	1 10 mm²		
type of connectable conductor cross-sections			
for auxiliary and control contacts			
— solid	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
finely stranded with core end processing	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
finely stranded without core end processing	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
for AWG cables for auxiliary and control contacts	1x (AWG 20 12)		
I I I I I I I I I I I I I I I I I	· · · · · · · · · · · · · · · · · · ·		

			Declaration of Cor	
ertificates/ approvals	<u>relays</u>			
of NEOZED fuse usable	5SE2306; These fuses have a smaller rated current than the semiconductor			
manufacturer's article number	relays			
<ul> <li>at cylindrical design 10 x 38 mm usable</li> <li>at cylindrical design 14 x 51 mm usable</li> </ul>	3NW6001-1: These fuses have a smaller rated current than the semiconductor relays 3NW6101-1: These fuses have a smaller rated current than the semiconductor			
Ç	relays			
at NH design usable	3NA6803; These fuses have a smaller rated current than the semiconductor			
cylindrical design 22 x 58 mm usable manufacturer's article number of the gG fuse				
cylindrical design 14 x 51 mm usable  of back-up R fuse link for semiconductor protection at	3NC2225			
cylindrical design 10 x 38 mm usable  of back-up R fuse link for semiconductor protection at	3NC1032 3NC1430			
of back-up R fuse link for semiconductor protection at NH design usable     of back-up R fuse link for semiconductor protection at	3NE8015-1			
<ul> <li>of full range R fuse link for semiconductor protection at cylindrical design usable</li> <li>of back-up R fuse link for semiconductor protection at NH</li> </ul>	5SE1325 3NE8015-1			
of gS fuse for semiconductor protection at NH design usable	3NE1814-0			
manufacturer's article number				
hort-circuit protection, design of the fuse link				
field-bound HF interference emission according to CISPR11	Class B for the domestic, busin	ess and commercial envi	ronments	
conducted HF interference emissions according to CISPR11	Class A for industrial environment			
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV	air discharging, behavior	criterion 2	
field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1			
due to high-frequency radiation according to IEC 61000- 4-6	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1			
due to conductor-conductor surge according to IEC 61000-4-5	1 kV behavior criterion 2			
• due to conductor-earth surge according to IEC 61000-4-5	2 kV behavior criterion 2			
• due to burst according to IEC 61000-4-4	2 kV / 5 kHz behavior criterion 2			
conducted interference				
ectromagnetic compatibility				
during storage	-55 +80 °C			
during operation	-25 +60 °C			
ambient temperature				
installation altitude at height above sea level maximum	1 000 m			
mbient conditions	finger-safe, for vertical contact	HOIT THE HOIT		
protection class IP on the front according to IEC 60529	IP20	from the front		
related data	IP20			
for auxiliary and control contacts      fotu related data.	7 mm			
• for main contacts	7 mm			
stripped length of the cable				
of the auxiliary and control contacts	M3			
• for main contacts	M4			
design of the thread of the connection screw				
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	4.5 5.3 lbf·in			
for main contacts with screw-type terminals	7 10.3 lbf·in			
tightening torque [lbf·in]				
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	0.5 0.6 N·m			
for main contacts with screw-type terminals	2 2.5 N·m			
ightening torque				



Confirmation









Declaration of Conformity

**Test Certificates** 

other

Railway



Special Test Certificate

Type Test Certificates/Test Report

Confirmation



Vibration and Shock

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2120-1AA02


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2120-1AA02


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RF2120-1AA02

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF2120-1AA02&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF2120-1AA02&lang=en</a>

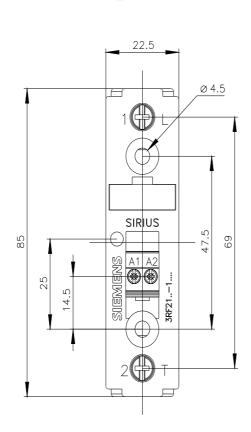

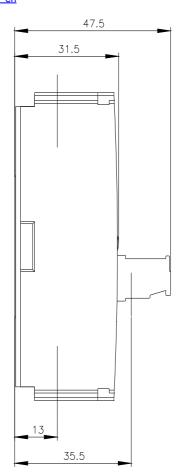

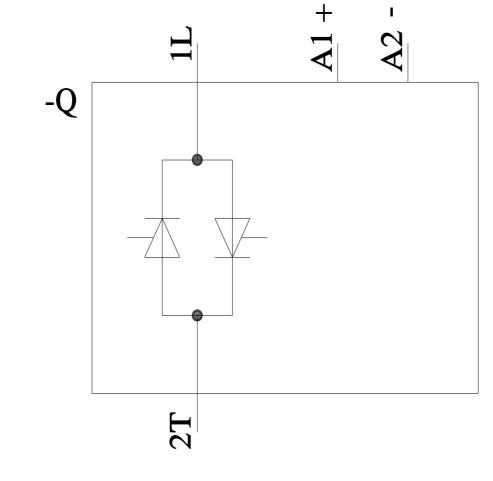

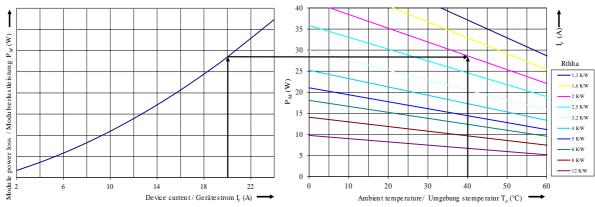

last modified: 1/12/2022 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RF21201AA02