SIEMENS

Data sheet 3RF2120-1AA24



Semiconductor relay, 1-phase 3RF2 Width 22.5 mm, 20 A 48-460 V / 110-230 V AC screw terminal

product brand name	SIRIUS
product designation	solid-state relay
design of the product	single-phase
product type designation	3RF21
manufacturer's article number	
_1 of the accessories that can be ordered	3RF2900-3PA88
_2 of the accessories that can be ordered	3RF2920-0HA36
 _4 of the accessories that can be ordered 	3RF2920-0GA36
product designation	
_1 of the accessories that can be ordered	terminal cover
_2 of the accessories that can be ordered	power regulator
_4 of the accessories that can be ordered	load monitoring
General technical data	
product function	zero-point switching
power loss [V·A] maximum	28.6 VA
power loss [W] for rated value of the current	
 at AC in hot operating state 	28.6 W
 at AC in hot operating state per pole 	28.6 W
without load current share typical	3.5 W
insulation voltage rated value	600 V
type of voltage of the control supply voltage	AC
surge voltage resistance of main circuit rated value	6 kV
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to EN 61346-2	Q
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/28/2009
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
operating voltage at AC	
 at 50 Hz rated value 	48 460 V
at 60 Hz rated value	48 460 V
operating frequency rated value	50 60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operating range relative to the operating voltage at AC	
● at 50 Hz	40 506 V
• at 60 Hz	40 506 V
operational current	

• at AC-51 rated value	20 A		
according to UL 508 rated value	20 A		
ampacity maximum	20 A		
operational current minimum	100 mA		
rate of voltage rise at the thyristor for main contacts maximum permissible	500 V/µs		
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V		
reverse current of the thyristor	10 mA		
derating temperature	40 °C		
surge current resistance rated value	200 A		
I2t value maximum	200 A²-s		
Control circuit/ Control			
type of voltage of the control supply voltage	AC		
control supply voltage 1 at AC			
• at 50 Hz	110 230 V		
● at 60 Hz	110 230 V		
control supply voltage frequency			
• 1 rated value	50 Hz		
• 2 rated value	60 Hz		
control supply voltage at AC			
at 50 Hz full-scale value for signal<0> recognition	40 V		
at 60 Hz full-scale value for signal<0> recognition	40 V		
control supply voltage			
at AC initial value for signal <1> detection	90 V		
symmetrical line frequency tolerance	5 Hz		
control current at minimum control supply voltage			
• at AC	2 mA		
control current at AC rated value	15 mA		
ON-delay time	40 ms; additionally max. one half-wave		
OFF-delay time	40 ms; additionally max. one half-wave		
o doidy tillio	10 mg, additionally max. one nan-wave		
Auxiliary circuit			
Auxiliary circuit	0		
number of NC contacts for auxiliary contacts	0		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	0		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts			
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions	0		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method • side-by-side mounting	0 0 screw fixing Yes		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	o screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm screw-type terminals screw-type terminals		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm screw-type terminals screw-type terminals		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm screw-type terminals screw-type terminals		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 screw fixing Yes M4 1.5 N·m 13 lbf-in 85 mm 22.5 mm 48 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm²		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm²		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm²		
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw fixing Yes M4 1.5 N·m 13 lbf·in 85 mm 22.5 mm 48 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm²		

General Product Approval		EMC	Declaration of Conformity	
Certificates/ approvals				
of NEOZED fuse usable	5SE2306: These fuses have a smaller rated current than the semiconductor relays			
at cylindrical design 14 x 51 mm usable manufacturer's article number	3NW6101-1: These fuses have a smaller rated current than the semiconductor relays			
at NH design usable	3NA6801: These fuses have a smaller rated current than the semiconductor relays			
manufacturer's article number of the gG fuse				
 of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable 	3NC2220			
of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	3NC1425			
of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable	3NC1016: These fuses have a smaller rated current than the semiconductor relays			
of back-up R fuse link for semiconductor protection at NH design usable	3NE8015-1			
of full range R fuse link for semiconductor protection at cylindrical design usable	<u>relays</u> <u>5SE1320</u>			
 of gS fuse for semiconductor protection at NH design usable 	3NE1813-0: These fuses have a smaller rated current than the semiconductor			
manufacturer's article number				
Short-circuit protection, design of the fuse link				
CISPR11 field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments			
conducted HF interference emissions according to	Class A for industrial environment			
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2			
4-6 field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m. behavior criterion 1			
• due to high-frequency radiation according to IEC 61000-	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1			
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV behavior criterion 2			
• due to conductor-earth surge according to IEC 61000-4-5	2 kV behavior criterion 2			
 due to burst according to IEC 61000-4-4 	2 kV / 5 kHz behavior criterion 2	2		
conducted interference				
Electromagnetic compatibility				
during storage	-55 +80 °C			
during operation	-25 +60 °C			
ambient temperature				
installation altitude at height above sea level maximum	1 000 m			
mbient conditions				
touch protection on the front according to IEC 60529	finger-safe, for vertical contact f	from the front		
protection class IP on the front according to IEC 60529	IP20			
afety related data				
for auxiliary and control contacts	7 mm			
• for main contacts	7 mm			
stripped length of the cable				
of the auxiliary and control contacts	M3			
• for main contacts	M4			
terminals design of the thread of the connection screw				
 for main contacts with screw-type terminals for auxiliary and control contacts with screw-type 	7 10.3 lbf·in 4.5 5.3 lbf·in			
tightening torque [lbf·in]				
 for main contacts with screw-type terminals for auxiliary and control contacts with screw-type terminals 	2 2.5 N·m 0.5 0.6 N·m			
tightening torque				
main contacts	14 10			
for AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for	1x (AWG 20 12)			
— finely stranded without core end processing	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)			



Confirmation









Declaration of Conformity

Test Certificates other

Railway



Type Test Certificates/Test Report

Special Test Certificate

Confirmation



Vibration and Shock

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2120-1AA24


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2120-1AA24


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RF2120-1AA24

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2120-1AA24&lang=en

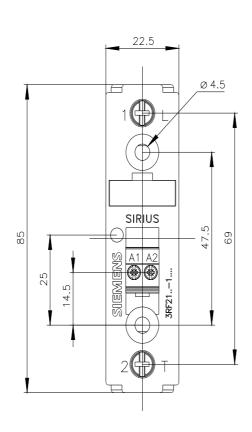

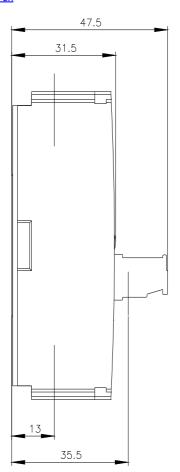

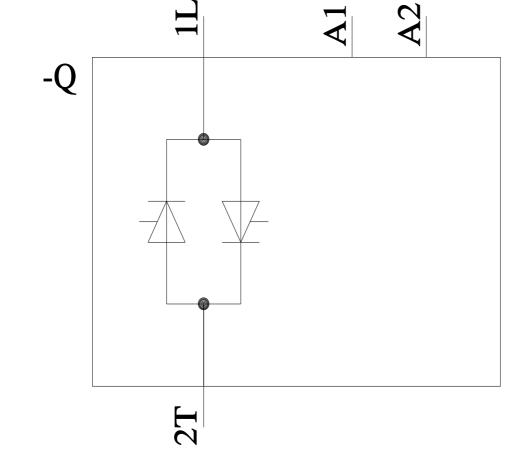

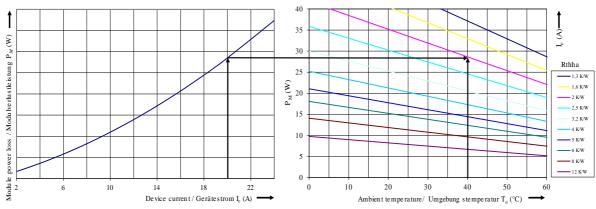

last modified: 1/12/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RF21201AA24