# **SIEMENS**

Data sheet 3RF2120-2AA24



Semiconductor relay, 1-phase 3RF2 Width 22.5 mm, 20 A 48-460 V / 110-230 V AC Spring-type terminal

product brand name	SIRIUS
product designation	solid-state relay
design of the product	single-phase
product type designation	3RF21
General technical data	
product function	zero-point switching
power loss [V·A] maximum	28.6 VA
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	28.6 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	28.6 W
<ul> <li>without load current share typical</li> </ul>	3.5 W
insulation voltage rated value	600 V
type of voltage of the control supply voltage	AC
surge voltage resistance of main circuit rated value	6 kV
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to EN 61346-2	Q
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/28/2009
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
operating voltage at AC	
<ul> <li>at 50 Hz rated value</li> </ul>	48 460 V
at 60 Hz rated value	48 460 V
operating frequency rated value	50 60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operating range relative to the operating voltage at AC	
• at 50 Hz	40 506 V
• at 60 Hz	40 506 V
operational current	
• at AC-51 rated value	20 A
according to UL 508 rated value	20 A
ampacity maximum	20 A
operational current minimum	100 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	500 V/μs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA

derating temperature	40 °C
surge current resistance rated value	200 A
	200 A <sup>2</sup> ·s
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
at 50 Hz	110 230 V
• at 50 Hz • at 60 Hz	110 230 V 110 230 V
• at 60 Hz  control supply voltage frequency	1.0 200 Y
• 1 rated value	50 Hz
• 1 rated value • 2 rated value	50 Hz
• 2 rated value  control supply voltage at AC	VV 112
at 50 Hz full-scale value for signal<0> recognition	40 V
<ul> <li>at 50 Hz full-scale value for signal&lt;0&gt; recognition</li> <li>at 60 Hz full-scale value for signal&lt;0&gt; recognition</li> </ul>	40 V
<ul><li>control supply voltage</li><li>at AC initial value for signal &lt;1&gt; detection</li></ul>	90 V
at AC initial value for signal <1> detection  symmetrical line frequency tolerance	90 V 5 Hz
control current at minimum control supply voltage	V - 102
• at AC	2 mA
at AC  control current at AC rated value	2 MA 15 mA
	40 ms; additionally max. one half-wave
ON-delay time OFF-delay time	40 ms; additionally max. one half-wave
Auxiliary circuit	10 mg, additionally max. One nair-wave
	0
number of NC contacts for auxiliary contacts	
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	
Installation/ mounting/ dimensions	scrow fiving
fastening method	screw fixing
side-by-side mounting  design of the thread of the screw for securing the	Yes
design of the thread of the screw for securing the equipment	M4
tightening torque of fixing screw maximum	1.5 N·m
tightening torque [lbf·in] of fixing screw maximum	13 lbf-in
height	85 mm
width	22.5 mm
depth	48 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	spring-loaded terminals
for auxiliary and control circuit	spring-loaded terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (0.5 2.5 mm²)
finely stranded with core end processing	2x (0.5 1.5 mm²)
— finely stranded without core end processing	2x (0.5 2.5 mm²)
• for AWG cables for main contacts	2x (18 14)
connectable conductor cross-section for main contacts	
solid or stranded	0.5 2.5 mm²
finely stranded with core end processing	0.5 1.5 mm²
finely stranded without core end processing	0.5 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary and control contacts	
— solid	0.5 1.5 mm²
finely stranded with core end processing	0.5 2.5 mm²
— finely stranded without core end processing	0.5 2.5 mm²
for AWG cables for auxiliary and control contacts	1x (AWG 20 12)
AWG number as coded connectable conductor cross section for main contacts	14 10
tightening torque	
for main contacts with screw-type terminals	2 2.5 N·m
stripped length of the cable	

• for main contacts	10 mm
for auxiliary and control contacts	10 mm
Safety related data	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
Electromagnetic compatibility	
conducted interference	
<ul> <li>due to burst according to IEC 61000-4-4</li> </ul>	2 kV / 5 kHz behavior criterion 2
<ul> <li>due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV behavior criterion 2
<ul> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV behavior criterion 2
<ul> <li>due to high-frequency radiation according to IEC 61000- 4-6</li> </ul>	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1
field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions according to CISPR11	Class A for industrial environment
field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments
Short-circuit protection, design of the fuse link	
manufacturer's article number	
<ul> <li>of gS fuse for semiconductor protection at NH design usable</li> </ul>	3NE1813-0: These fuses have a smaller rated current than the semiconductor relays
<ul> <li>of full range R fuse link for semiconductor protection at cylindrical design usable</li> </ul>	5SE1320
<ul> <li>of back-up R fuse link for semiconductor protection at NH design usable</li> </ul>	3NE8015-1
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable</li> </ul>	3NC1016: These fuses have a smaller rated current than the semiconductor relays
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li> </ul>	3NC1425
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li> </ul>	3NC2220
manufacturer's article number of the gG fuse	
at NH design usable	3NA6801: These fuses have a smaller rated current than the semiconductor relays
• at cylindrical design 14 x 51 mm usable	3NW6101-1; These fuses have a smaller rated current than the semiconductor relays
manufacturer's article number	
of NEOZED fuse usable	5SE2306; These fuses have a smaller rated current than the semiconductor relays
Certificates/ approvals	

**General Product Approval** 

**EMC** 

Declaration of Conformity



Confirmation









**Declaration of Con-**

**Test Certificates** 

other

Railway



Special Test Certific-<u>ate</u>

Type Test Certificates/Test Report

Confirmation



Vibration and Shock

Siemens has decided to exit the Russian market (see here).

### Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

### Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2120-2AA24

### Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2120-2AA24


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RF2120-2AA24


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF2120-2AA24&lang=en

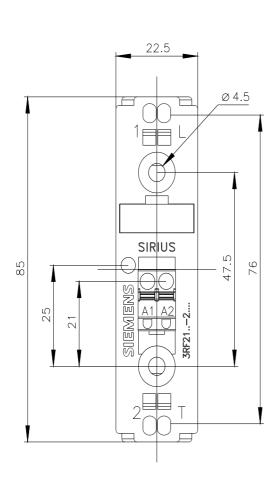

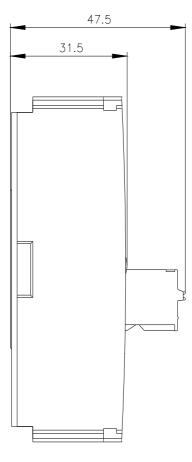

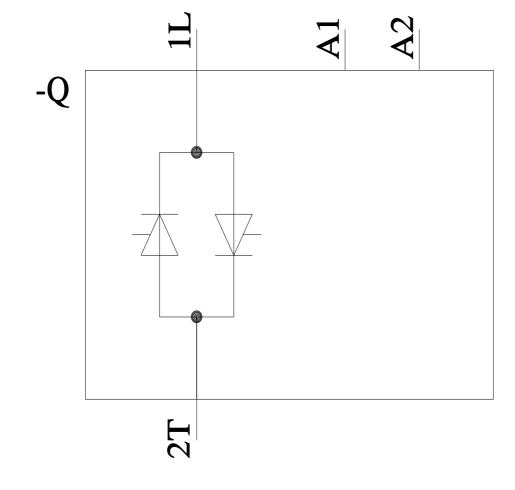

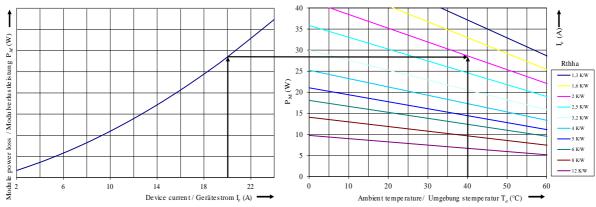

last modified: 1/12/2022 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RF21202AA24