SIEMENS

Data sheet 3RF2120-3AA02



Semiconductor relay, 1-phase 3RF2 Width 22.5 mm, 20 A 24-230 V / 24 V DC Ring cable connection

product brand name	SIRIUS
product designation	solid-state relay
design of the product	single-phase
product type designation	3RF21
manufacturer's article number	
_1 of the accessories that can be ordered	3RF2900-3PA88
 _3 of the accessories that can be ordered 	3RF2900-0EA18
 _4 of the accessories that can be ordered 	3RF2920-0GA13
product designation	
_1 of the accessories that can be ordered	terminal cover
 _3 of the accessories that can be ordered 	converter
_4 of the accessories that can be ordered	load monitoring
General technical data	
product function	zero-point switching
power loss [V·A] maximum	28.6 VA
power loss [W] for rated value of the current	
 at AC in hot operating state 	28.6 W
 at AC in hot operating state per pole 	28.6 W
 without load current share typical 	0.4 W
insulation voltage rated value	600 V
type of voltage of the control supply voltage	DC
surge voltage resistance of main circuit rated value	6 kV
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to EN 61346-2	Q
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/28/2009
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
operating voltage at AC	
 at 50 Hz rated value 	24 230 V
at 60 Hz rated value	24 230 V
operating frequency rated value	50 60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operating range relative to the operating voltage at AC	
• at 50 Hz	20 253 V
• at 60 Hz	20 253 V
operational current	

at AC-51 rated value	20 A		
according to UL 508 rated value	20 A		
ampacity maximum	20 A		
operational current minimum	100 mA		
rate of voltage rise at the thyristor for main contacts	500 V/µs		
maximum permissible			
blocking voltage at the thyristor for main contacts maximum permissible	800 V		
reverse current of the thyristor	10 mA		
derating temperature	40 °C		
surge current resistance rated value	200 A		
I2t value maximum	200 A ² ·s		
Control circuit/ Control			
type of voltage of the control supply voltage	DC		
control supply voltage 1			
at DC rated value	30 V		
• at DC	15 24 V		
control supply voltage			
 at DC initial value for signal <1> detection 	15 V		
• at DC full-scale value for signal<0> recognition	5 V		
control current at minimum control supply voltage			
• at DC	13 mA		
control current at DC rated value	15 mA		
ON-delay time	1 ms; additionally max. one half-wave		
OFF-delay time	1 ms; additionally max. one half-wave		
Auxiliary circuit			
number of NC contacts for auxiliary contacts	0		
number of NO contacts for auxiliary contacts	0		
number of CO contacts for auxiliary contacts	0		
Installation/ mounting/ dimensions			
fastening method	screw fixing		
side-by-side mounting	Yes		
design of the thread of the screw for securing the equipment	M4		
tightening torque of fixing screw maximum	1.5 N·m		
tightening torque [lbf·in] of fixing screw maximum	13 lbf-in		
height	85 mm		
width	22.5 mm		
depth	48 mm		
Connections/ Terminals			
type of electrical connection			
for main current circuit	Ring cable lug connection		
• for auxiliary and control circuit	ring terminal lug connection		
type of connectable conductor cross-sections			
for main contacts for JIS cable lug	JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5		
for DIN cable lug for main contacts	DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25		
type of connectable conductor cross-sections			
for auxiliary and control contacts			
— solid	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
 finely stranded with core end processing 	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
finely stranded without core end processing	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
for AWG cables for auxiliary and control contacts	1x (AWG 20 12)		
tightening torque			
for main contacts with screw-type terminals	2 2.5 N·m		
for auxiliary and control contacts with screw-type terminals	0.5 0.6 N·m		
tightening torque [lbf·in]			
• for main contacts with screw-type terminals	7 10.3 lbf-in		
 for auxiliary and control contacts with screw-type terminals 	4.5 5.3 lbf·in		
design of the thread of the connection screw			
• for main contacts	M5		

of the auxiliary and control contacts	M3			
stripped length of the cable	Wio			
• for main contacts	7 mm			
for auxiliary and control contacts	7 mm			
Safety related data	7 111111	_	_	
	IDOO IDOO with a seem			
protection class IP on the front according to IEC 60529	IP00; IP20 with cover finger-safe, for vertical contact from the front with cover			
touch protection on the front according to IEC 60529	finger-safe, for vertical contact f	rom the front with cover	_	
Ambient conditions				
installation altitude at height above sea level maximum	1 000 m			
ambient temperature				
during operation	-25 +60 °C			
during storage	-55 +80 °C			
Electromagnetic compatibility				
conducted interference				
 due to burst according to IEC 61000-4-4 	2 kV / 5 kHz behavior criterion 2	2		
 due to conductor-earth surge according to IEC 61000-4-5 	2 kV behavior criterion 2			
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV behavior criterion 2			
 due to high-frequency radiation according to IEC 61000- 4-6 	140 dBuV in the frequency rang	e 0.15 80 MHz, behav	rior criterion 1	
field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, beha	vior criterion 1		
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV	air discharging, behavior	criterion 2	
conducted HF interference emissions according to CISPR11	Class A for industrial environme	nt		
field-bound HF interference emission according to CISPR11	Class B for the domestic, busine	ess and commercial envi	ronments	
Short-circuit protection, design of the fuse link				
Short-circuit protection, design of the fuse link manufacturer's article number				
	3NE1814-0			
manufacturer's article number • of gS fuse for semiconductor protection at NH design	3NE1814-0 5SE1325			
manufacturer's article number • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at				
manufacturer's article number of gS fuse for semiconductor protection at NH design usable of full range R fuse link for semiconductor protection at cylindrical design usable of back-up R fuse link for semiconductor protection at NH	<u>5SE1325</u>			
manufacturer's article number of gS fuse for semiconductor protection at NH design usable of full range R fuse link for semiconductor protection at cylindrical design usable of back-up R fuse link for semiconductor protection at NH design usable of back-up R fuse link for semiconductor protection at NH design usable	5SE1325 3NE8015-1			
manufacturer's article number of gS fuse for semiconductor protection at NH design usable of full range R fuse link for semiconductor protection at cylindrical design usable of back-up R fuse link for semiconductor protection at NH design usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable	5SE1325 3NE8015-1 3NC1032			
manufacturer's article number of gS fuse for semiconductor protection at NH design usable of full range R fuse link for semiconductor protection at cylindrical design usable of back-up R fuse link for semiconductor protection at NH design usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable of back-up R fuse link for semiconductor protection at	5SE1325 3NE8015-1 3NC1032 3NC1430			
manufacturer's article number • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable	5SE1325 3NE8015-1 3NC1032 3NC1430	smaller rated current than	n the semiconductor	
manufacturer's article number • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable manufacturer's article number of the gG fuse	5SE1325 3NE8015-1 3NC1032 3NC1430 3NC2225 3NA6803: These fuses have a s			
manufacturer's article number • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable manufacturer's article number of the gG fuse • at NH design usable	5SE1325 3NE8015-1 3NC1032 3NC1430 3NC2225 3NA6803: These fuses have a serelays 3NW6001-1: These fuses have	a smaller rated current th	nan the semiconductor	
manufacturer's article number • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable • at NH design usable • at cylindrical design 10 x 38 mm usable • at cylindrical design 10 x 38 mm usable	5SE1325 3NE8015-1 3NC1032 3NC1430 3NC2225 3NA6803: These fuses have as relays 3NW6001-1: These fuses have relays 3NW6101-1: These fuses have	a smaller rated current th	nan the semiconductor	
manufacturer's article number • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable manufacturer's article number of the gG fuse • at NH design usable • at cylindrical design 10 x 38 mm usable • at cylindrical design 10 x 38 mm usable	5SE1325 3NE8015-1 3NC1032 3NC1430 3NC2225 3NA6803: These fuses have as relays 3NW6001-1: These fuses have relays 3NW6101-1: These fuses have	a smaller rated current the	nan the semiconductor	
manufacturer's article number • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable manufacturer's article number of the gG fuse • at NH design usable • at cylindrical design 10 x 38 mm usable • at cylindrical design 10 x 38 mm usable manufacturer's article number	5SE1325 3NE8015-1 3NC1032 3NC1430 3NC2225 3NA6803: These fuses have a serialyse and serials	a smaller rated current the	nan the semiconductor	

formity



Confirmation







Declaration of Con-

Test Certificates

other



Type Test Certificates/Test Report

Confirmation



Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2120-3AA02

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2120-3AA02


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RF2120-3AA02


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2120-3AA02&lang=en

+

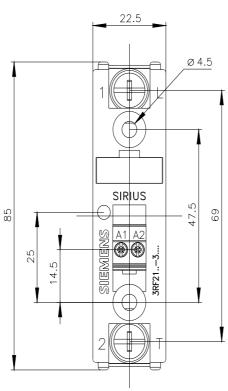

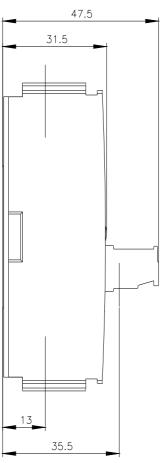

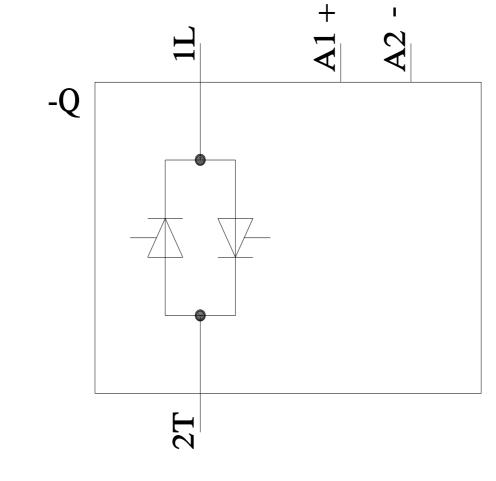

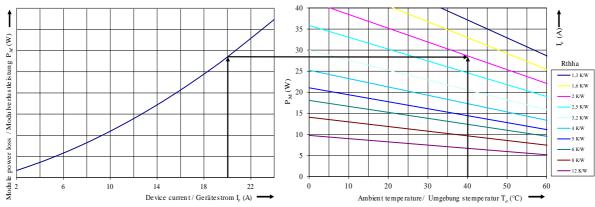

last modified: 1/27/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RF21203AA02