## SIEMENS

## Data sheet

## 3RF2320-2DA24



Solid-state contactor 1-phase 3RF2 AC 51 / 20 A / 40  $^\circ\rm C$  48-460 V / 110-230 V AC short circuit-proof with B miniature circuit breaker

product brand name	SIRIUS
product designation	solid-state contactor
design of the product	single-phase
product type designation	3RF23
General technical data	
product function	short-circuit resistant with B-automatic device
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	20 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	20 W
<ul> <li>without load current share typical</li> </ul>	3.5 W
insulation voltage rated value	600 V
degree of pollution	3
type of voltage	
<ul> <li>of the operating voltage</li> </ul>	AC
<ul> <li>of the control supply voltage</li> </ul>	AC
surge voltage resistance of main circuit rated value	6 kV
protection class IP	IP20
protection class IP on the front according to IEC 60529	IP20
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/28/2009
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4
Weight	0.196 kg
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
type of voltage of the operating voltage	AC
operating voltage	
● at AC	
— at 50 Hz rated value	48 460 V
— at 60 Hz rated value	48 460 V
operating frequency rated value	50 60 Hz
operating range relative to the operating voltage at AC	
● at 50 Hz	40 506 V
• at 60 Hz	40 506 V
operational current	
<ul> <li>at AC-51 rated value</li> </ul>	20 A

	40.0 Å
• at AC-51 according to IEC 60947-4-3	13.2 A
according to UL 508 rated value	17.6 A
operational current minimum	500 mA
operational current of the MCB at AC rated value	20 A
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/µs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	1 150 A
I2t value maximum	6 600 A <sup>2</sup> ·s
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
• at 50 Hz	110 230 V
• at 60 Hz	110 230 V
control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
control supply voltage at AC	
<ul> <li>at 50 Hz full-scale value for signal&lt;0&gt; recognition</li> </ul>	40 V
• at 60 Hz full-scale value for signal<0> recognition	40 V
control supply voltage	
<ul> <li>at AC initial value for signal &lt;1&gt; detection</li> </ul>	90 V
symmetrical line frequency tolerance	5 Hz
control current at minimum control supply voltage	
• at AC	2 mA
control current at AC rated value	15 mA
ON-delay time	40 ms; additionally max. one half-wave
OFF-delay time	40 ms; additionally max. one half-wave
Auxiliary circuit	
Auxiliary circuit type of switching contact	normally open contact (NO)
	normally open contact (NO) 0
type of switching contact	
type of switching contact number of NC contacts for auxiliary contacts	0
type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	0 0
type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts	0 0
type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions	0 0 0
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting	0 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment	0 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the	0 0 Ves screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height	0 0 Ves screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width	0 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth	0 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/mounting/dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/Terminals         product component removable terminal for auxiliary and control circuit	0 0 Ves screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/mounting/dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection	0 0 Ves screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit	0 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes Spring-loaded terminals
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit	0 0 Ves screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections	0 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes Spring-loaded terminals
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/mounting/dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for main contacts         • for main contacts	0 0 7 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes Spring-loaded terminals spring-loaded terminals
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/mounting/dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         - solid	0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes Spring-loaded terminals spring-loaded terminals 2x (0.5 2.5 mm <sup>2</sup> )
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/mounting/dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         — solid         — finely stranded with core end processing	0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes Yes spring-loaded terminals spring-loaded terminals 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> )
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/mounting/dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         — solid         — finely stranded with core end processing         — finely stranded without core end processing	0 0 7 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes Spring-loaded terminals spring-loaded terminals 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> )
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/mounting/dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         — solid         — finely stranded with core end processing         — finely stranded without core end processing         — finely stranded without core end processing         — finely stranded without core end processing	0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes Yes spring-loaded terminals spring-loaded terminals 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> )
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/mounting/dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/Terminals         product component removable terminal for auxiliary and control circuit         type of connectable conductor cross-sections         • for main current circuit         • for main contacts         — solid         — finely stranded with core end processing         — finely stranded without core end processing         • for AWG cables for main contacts         connectable conductor cross-section for main contacts	0 0 0 7 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm 7 Yes Spring-loaded terminals spring-loaded terminals 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (18 14)
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         — solid         — finely stranded with core end processing         — finely stranded without core end processing         • for AWG cables for main contacts         connectable conductor cross-section for main contacts         • solid or stranded	0 0 7 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes Spring-loaded terminals spring-loaded terminals 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (18 14) 0.5 2.5 mm <sup>2</sup>
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for main current circuit         • for main contacts         - solid         - finely stranded with core end processing         • for AWG cables for main contacts         • solid or stranded         • finely stranded with core end processing	0 0 7 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes Spring-loaded terminals spring-loaded terminals 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (18 14) 0.5 2.5 mm <sup>2</sup>
type of switching contact         number of NC contacts for auxiliary contacts         number of NO contacts for auxiliary contacts         number of CO contacts for auxiliary contacts         Installation/ mounting/ dimensions         fastening method side-by-side mounting         fastening method         design of the thread of the screw for securing the equipment         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         — solid         — finely stranded with core end processing         — finely stranded without core end processing         • for AWG cables for main contacts         connectable conductor cross-section for main contacts         • solid or stranded	0 0 7 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 95 mm 22.5 mm 120 mm Yes Spring-loaded terminals spring-loaded terminals 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (18 14) 0.5 2.5 mm <sup>2</sup>

<ul> <li>for auxiliary and control contacts</li> <li>— solid</li> </ul>	0.5 1.5 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm <sup>2</sup>
— finely stranded without core end processing	0.5 2.5 mm <sup>2</sup>
for AWG cables for auxiliary and control contacts	1x (AWG 20 12)
AWG number as coded connectable conductor cross section for main contacts	14 18
stripped length of the cable	-
• for main contacts	7 mm
<ul> <li>for auxiliary and control contacts</li> </ul>	7 mm
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
mbient conditions	
installation altitude at height above sea level maximum	1 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
lectromagnetic compatibility	
conducted interference	
due to burst according to IEC 61000-4-4	2 kV / 5 kHz behavior criterion 2
-	
<ul> <li>due to conductor-earth surge according to IEC 61000-4-5</li> <li>due to conductor-conductor surge according to IEC</li> </ul>	2 kV behavior criterion 2
61000-4-5	1 kV behavior criterion 2
due to high-frequency radiation according to IEC 61000- 4-6	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1
field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions according to CISPR11	Class A for industrial environment
field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments
hort-circuit protection, design of the fuse link	
manufacturer's article number	
of gS fuse for semiconductor protection at NH design usable	<u>3NE1814-0</u>
• of full range R fuse link for semiconductor protection at cylindrical design usable	<u>5SE1325</u>
of back-up R fuse link for semiconductor protection at NH design usable	<u>3NE8015-1</u>
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable</li> </ul>	<u>3NC1032</u>
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li> </ul>	<u>3NC1450</u>
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li> </ul>	<u>3NC2263</u> -
manufacturer's article number of the gG fuse	
• at NH design usable	<u>3NA6807</u>
• at cylindrical design 10 x 38 mm usable	<u>3NW6005-1: These fuses have a smaller rated current than the semiconductor</u> relays
• at cylindrical design 14 x 51 mm usable	<u>3NW6105-1: These fuses have a smaller rated current than the semiconductor relays</u>
• at cylindrical design 22 x 58 mm usable	3NW6205-1: These fuses have a smaller rated current than the semiconductor relays
manufacturer's article number	
	<u>5SB2711</u>
<ul> <li>of DIAZED fuse usable</li> </ul>	5SE2320
<ul><li>of DIAZED fuse usable</li><li>of NEOZED fuse usable</li></ul>	

<u>Type Test Certific-</u> ates/Test Report Special Test Certificate **Confirmation** 

other



Railway

Special Test Certific-

<u>ate</u>

Environment

Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2320-2DA24

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2320-2DA24


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RF2320-2DA24


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF2320-2DA24&lang=en

Ø4.5 22.5 ſŶ G SIRIUS ŵ 95 90 76 47. SIEMENS Α1 25 2 2320-Ø5

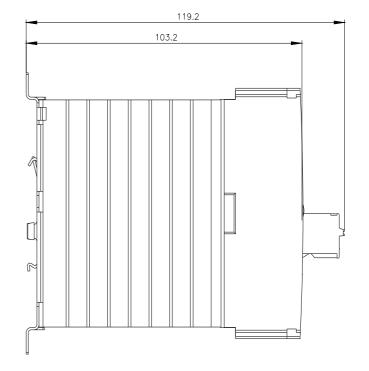

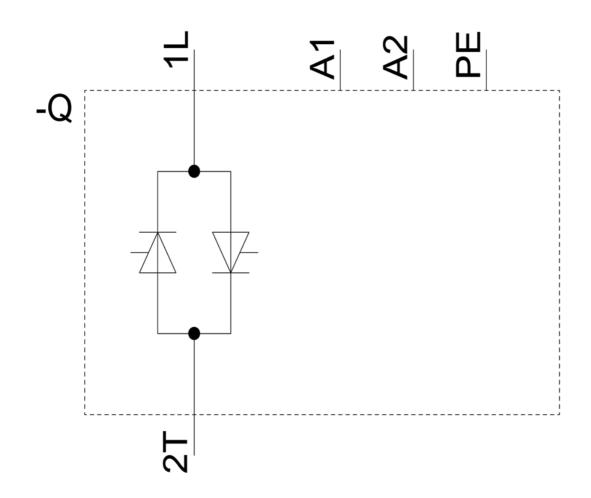

Subject to change without notice © Copyright Siemens

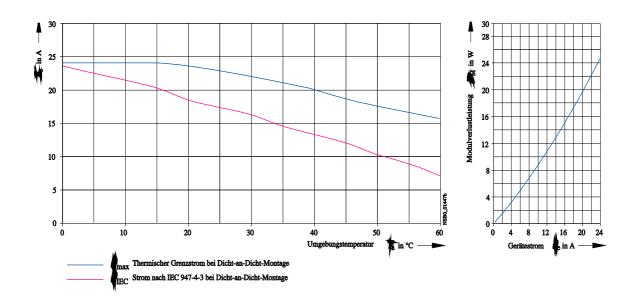

last modified:

8/12/2024 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RF23202DA24