SIEMENS

Data sheet

3RF2330-1BA02



Solid-state contactor 1-phase 3RF2 AC 15 / 15 A / 40 $^\circ\text{C}$ 24-230 V / 24 V DC Instantaneous switching

product brand name	SIRIUS			
product designation	solid-state contactor			
design of the product	single-phase			
product type designation	3RF23			
manufacturer's article number				
 _1 of the accessories that can be ordered 	<u>3RF2900-3PA88</u>			
 _2 of the accessories that can be ordered 	<u>3RF2950-0HA13</u>			
 _3 of the accessories that can be ordered 	<u>3RF2900-0EA18</u>			
 _4 of the accessories that can be ordered 	<u>3RF2950-0GA13</u>			
 _5 of the accessories that can be ordered 	<u>3RF2920-0FA08</u>			
product designation				
 _1 of the accessories that can be ordered 	terminal cover			
 _2 of the accessories that can be ordered 	power regulator			
 _3 of the accessories that can be ordered 	converter			
 _4 of the accessories that can be ordered 	load monitoring			
 _5 of the accessories that can be ordered 	load monitoring, basis			
General technical data				
product function	instantaneous switching			
power loss [W] for rated value of the current				
 at AC in hot operating state 	33 W			
 at AC in hot operating state per pole 	33 W			
 without load current share typical 	0.4 W			
insulation voltage rated value	600 V			
degree of pollution	3			
type of voltage				
 of the operating voltage 	AC			
 of the control supply voltage 	DC			
surge voltage resistance of main circuit rated value	6 kV			
protection class IP	IP20			
protection class IP on the front according to IEC 60529	IP20			
shock resistance according to IEC 60068-2-27	15g / 11 ms			
vibration resistance according to IEC 60068-2-6	2g			
reference code according to IEC 81346-2	Q			
Substance Prohibitance (Date)	05/28/2009			
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4			
Weight	0.3 kg			
Main circuit				
number of poles for main current circuit	1			
number of NO contacts for main contacts	1			

number of NC contacts for main contacts	0				
type of voltage of the operating voltage	AC				
operating voltage					
• at AC					
— at 50 Hz rated value	24 230 V				
— at 60 Hz rated value	24 230 V				
	24 230 V 50 60 Hz				
operating frequency rated value	50 60 HZ				
operating range relative to the operating voltage at AC	00 050 1/				
• at 50 Hz	20 253 V				
• at 60 Hz	20 253 V				
operational current					
• at AC-51 rated value	30 A				
• at AC-51 according to IEC 60947-4-3	22 A				
according to UL 508 rated value	15 A				
operational current minimum	500 mA				
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/µs				
blocking voltage at the thyristor for main contacts maximum permissible	800 V				
reverse current of the thyristor	10 mA				
derating temperature	40 °C				
surge current resistance rated value	600 A				
I2t value maximum	1 800 A ² ·s				
Control circuit/ Control					
type of voltage of the control supply voltage	DC				
control supply voltage 1 at DC rated value maximum permissible	30 V				
control supply voltage 1 at DC	15 24 V				
control supply voltage					
 at DC initial value for signal <1> detection 	15 V				
 at DC full-scale value for signal<0> recognition 	5 V				
control current at minimum control supply voltage					
• at DC	13 mA				
control current at DC rated value	15 mA				
ON-delay time	1 ms				
OFF-delay time	1 ms; additionally max. one half-wave				
Auxiliary circuit					
type of switching contact	normally open contact (NO)				
number of NC contacts for auxiliary contacts	0				
number of NO contacts for auxiliary contacts	0				
number of CO contacts for auxiliary contacts	0				
Installation/ mounting/ dimensions	•				
	Yes				
fastening method side-by-side mounting fastening method	screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715				
design of the thread of the screw for securing the equipment	M4				
height	100 mm				
width	45 mm				
depth	139 mm				
Connections/ Terminals					
product component removable terminal for auxiliary and	Yes				
control circuit					
type of electrical connection					
for main current circuit	screw-type terminals				
for auxiliary and control circuit	screw-type terminals				
type of connectable conductor cross-sections					
for main contacts					
— solid	2x (1.5 2.5 mm²), 2x (2.5 6 mm²)				
 — finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²				
 for AWG cables for main contacts 	2x (14 10)				
connectable conductor cross-section for main contacts					

• solid or stranded	1.5 6 mm ²			
finely stranded with core end processing	1 10 mm²			
type of connectable conductor cross-sections				
 for auxiliary and control contacts 				
— solid	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)			
 finely stranded with core end processing 	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)			
 finely stranded without core end processing 	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)			
 for AWG cables for auxiliary and control contacts 	1x (AWG 20 12)			
AWG number as coded connectable conductor cross section for main contacts	10 14			
tightening torque				
 for main contacts with screw-type terminals 	2 2.5 N·m			
 for auxiliary and control contacts with screw-type terminals 	0.5 0.6 N·m			
tightening torque [lbf·in]				
 for main contacts with screw-type terminals 	18 22 lbf·in			
 for auxiliary and control contacts with screw-type terminals 	4.5 5.3 lbf·in			
design of the thread of the connection screw				
for main contacts	M4			
 of the auxiliary and control contacts 	M3			
stripped length of the cable				
for main contacts	7 mm			
 for auxiliary and control contacts 	7 mm			
Electrical Safety				
protection class IP on the front according to IEC 60529	IP20			
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front			
Ambient conditions				
installation altitude at height above sea level maximum	1 000 m			
ambient temperature				
during operation	-25 +60 °C			
during storage	-55 +80 °C			
Electromagnetic compatibility				
conducted interference				
due to burst according to IEC 61000-4-4	2 kV / 5 kHz behavior criterion 2			
due to conductor-earth surge according to IEC 61000-4-5	2 kV behavior criterion 2			
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV behavior criterion 2			
	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1			
 due to high-frequency radiation according to IEC 61000- 4-6 	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1			
	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1 80 MHz 1 GHz 10 V/m, behavior criterion 1			
4-6 field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1			
4-6				
4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2			
4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment			
4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment			
4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment			
4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number • of gS fuse for semiconductor protection at NH design	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment Class B for the domestic, business and commercial environments			
4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment Class B for the domestic, business and commercial environments			
4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment Class B for the domestic, business and commercial environments 3NE1803-0 5SE1335			
 4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number of gS fuse for semiconductor protection at NH design usable of full range R fuse link for semiconductor protection at cylindrical design usable of back-up R fuse link for semiconductor protection at NH design usable of back-up R fuse link for semiconductor protection at NH 	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment Class B for the domestic, business and commercial environments 3NE1803-0 5SE1335 3NE8003-1			
 4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number of gS fuse for semiconductor protection at NH design usable of full range R fuse link for semiconductor protection at cylindrical design usable of back-up R fuse link for semiconductor protection at NH design usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable 	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment Class B for the domestic, business and commercial environments 3NE1803-0 5SE1335 3NE8003-1 3NC1032			
 4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number of gS fuse for semiconductor protection at NH design usable of full range R fuse link for semiconductor protection at cylindrical design usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable 	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment Class B for the domestic, business and commercial environments 3NE1803-0 5SE1335 3NE8003-1 3NC1032 3NC1450			
 4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number of gS fuse for semiconductor protection at NH design usable of full range R fuse link for semiconductor protection at cylindrical design usable of back-up R fuse link for semiconductor protection at NH design usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable 	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment Class B for the domestic, business and commercial environments 3NE1803-0 5SE1335 3NE8003-1 3NC1032 3NC1450			
 4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number of gS fuse for semiconductor protection at NH design usable of full range R fuse link for semiconductor protection at cylindrical design usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable 	80 MHz 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment Class B for the domestic, business and commercial environments 3NE1803-0 5SE1335 3NE8003-1 3NC1032 3NC1450 3NA6810: These fuses have a smaller rated current than the semiconductor			

nanufacturer's article numberof DIAZED fuse usable			5SB2711; These fuses have a smaller rated current than the semiconductor relays			
ble			a smaller rated current than	the semiconductor		
I				EMV		
<u>Confirmation</u>	UK CA		EHC	RCM		
	other		Railway	Environment		
<u>becial Test Certific-</u> ate	<u>Confirmation</u>		<u>Special Test Certific-</u> <u>ate</u>	Environmental Con- firmations		
	Decial Test Certific-	telays te	ale relays 5SE2320: These fuses have relays 5SE2320: These fuses have relays tother other other Decial Test Certific- ate Confirmation	relays 5SE2320: These fuses have a smaller rated current than relays Confirmation UK Image: Confirmation state other Railway becial Test Certificate Confirmation		

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2330-1BA02

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2330-1BA02


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RF2330-1BA02

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2330-1BA02&lang=en

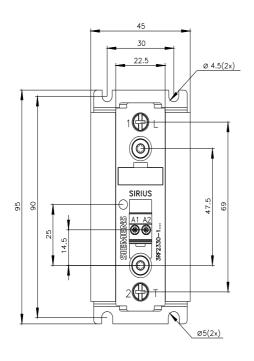

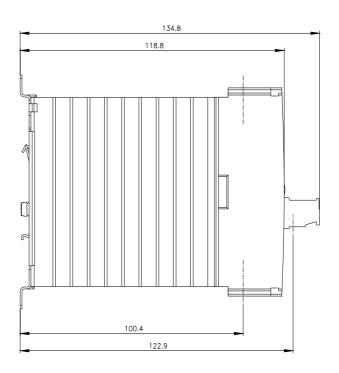

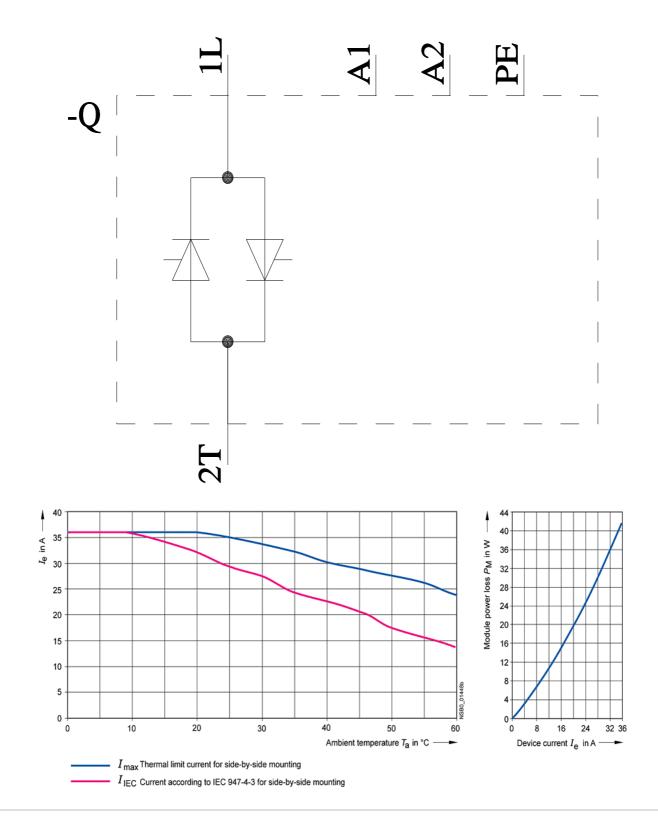

last modified:

8/12/2024 🖸

12/10/2024

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RF23301BA02