SIEMENS

Data sheet 3RF2340-3AA04



Solid-state contactor 1-phase 3RF2 AC 51 / 40 A / 40 $^{\circ}\text{C}$ 48-460 V / 24 V DC Ring cable connection

product brand name	SIRIUS
product designation	solid-state contactor
design of the product	single-phase
product type designation	3RF23
manufacturer's article number	
_1 of the accessories that can be ordered	3RF2900-3PA88
_3 of the accessories that can be ordered	3RF2900-0EA18
_4 of the accessories that can be ordered	3RF2950-0GA16
product designation	
_1 of the accessories that can be ordered	terminal cover
_3 of the accessories that can be ordered	converter
_4 of the accessories that can be ordered	load monitoring
General technical data	
product function	zero-point switching
power loss [W] for rated value of the current	
 at AC in hot operating state 	44 W
 at AC in hot operating state per pole 	44 W
without load current share typical	0.4 W
insulation voltage rated value	600 V
degree of pollution	3
type of voltage	
 of the operating voltage 	AC
of the control supply voltage	DC
surge voltage resistance of main circuit rated value	6 kV
protection class IP	IP00
protection class IP on the front according to IEC 60529	IP00
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	07/01/2006
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
	Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4
Weight	0.463 kg
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
type of voltage of the operating voltage	AC
operating voltage	
• at AC	

— at 50 Hz rated value	48 460 V	
— at 60 Hz rated value	48 460 V	
operating frequency rated value	50 60 Hz	
operating range relative to the operating voltage at AC		
● at 50 Hz	40 506 V	
● at 60 Hz	40 506 V	
operational current		
 at AC-51 rated value 	40 A	
at AC-51 according to IEC 60947-4-3	33 A	
according to UL 508 rated value	36 A	
operational current minimum	500 mA	
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/μs	
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V	
reverse current of the thyristor	10 mA	
derating temperature	40 °C	
surge current resistance rated value	1 200 A	
I2t value maximum	7 200 A²·s	
Control circuit/ Control		
type of voltage of the control supply voltage	DC	
control supply voltage 1 at DC rated value maximum permissible	30 V	
control supply voltage 1 at DC	15 24 V	
control supply voltage		
 at DC initial value for signal <1> detection 	15 V	
at DC full-scale value for signal<0> recognition	5 V	
control current at minimum control supply voltage		
• at DC	13 mA	
control current at DC rated value	15 mA	
ON-delay time	1 ms; additionally max. one half-wave	
OFF-delay time	1 ms; additionally max. one half-wave	
Auxiliary circuit		
Auxiliary circuit type of switching contact	normally open contact (NO)	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts	normally open contact (NO)	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	normally open contact (NO) 0	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts	normally open contact (NO)	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts lnstallation/ mounting/ dimensions	normally open contact (NO) 0 0 0	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts linstallation/ mounting/ dimensions fastening method side-by-side mounting	normally open contact (NO) 0 0 0 Ves	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts linstallation/ mounting/ dimensions fastening method side-by-side mounting fastening method	normally open contact (NO) 0 0 Ves screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment	normally open contact (NO) 0 0 Ves screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts lnstallation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts lnstallation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm	
type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts lnstallation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm Yes Ring cable lug connection	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts lnstallation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm Yes Ring cable lug connection ring terminal lug connection	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts for JIS cable lug	normally open contact (NO) 0 0 1 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm Yes Ring cable lug connection ring terminal lug connection	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts for JIS cable lug • for DIN cable lug for main contacts	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm Yes Ring cable lug connection ring terminal lug connection	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	normally open contact (NO) 0 0 1 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm Yes Ring cable lug connection ring terminal lug connection	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm Yes Ring cable lug connection ring terminal lug connection JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5 DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm Yes Ring cable lug connection ring terminal lug connection JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5 DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts for JIS cable lug • for DIN cable lug for main contacts type of connectable conductor cross-sections • for auxiliary and control contacts - solid - finely stranded with core end processing	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm Yes Ring cable lug connection ring terminal lug connection JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5 DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)	
type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	normally open contact (NO) 0 0 1 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm Yes Ring cable lug connection ring terminal lug connection JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5 DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)	
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts for JIS cable lug • for DIN cable lug for main contacts type of connectable conductor cross-sections • for auxiliary and control contacts - solid - finely stranded with core end processing	normally open contact (NO) 0 0 Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 M4 100 mm 67 mm 141 mm Yes Ring cable lug connection ring terminal lug connection JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5 DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)	

- for manin combants with payous to make the main also	2 2 5 N m		
for main contacts with screw-type terminals	2 2.5 N·m		
 for auxiliary and control contacts with screw-type terminals 	0.5 0.6 N·m		
tightening torque [lbf·in]			
 for auxiliary and control contacts with screw-type terminals 	4.5 5.3 lbf·in		
design of the thread of the connection screw			
for main contacts	M5		
of the auxiliary and control contacts	M3		
stripped length of the cable			
• for main contacts	10 mm		
 for auxiliary and control contacts 	10 mm		
Electrical Safety			
protection class IP on the front according to IEC 60529	IP00; IP20 with cover		
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover		
Ambient conditions			
installation altitude at height above sea level maximum	1 000 m		
ambient temperature			
during operation	-25 +60 °C		
during storage	-55 +80 °C		
Electromagnetic compatibility			
conducted interference			
due to burst according to IEC 61000-4-4	2 kV / 5 kHz hohavior criteries 2		
 due to conductor-earth surge according to IEC 61000-4-5 	2 kV / 5 kHz behavior criterion 2		
-	2 kV behavior criterion 2		
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV behavior criterion 2		
 due to high-frequency radiation according to IEC 61000- 4-6 	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1		
field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1		
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2		
conducted HF interference emissions according to CISPR11	Class A for industrial environment		
field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial env	ironments	
Short-circuit protection, design of the fuse link			
manufacturer's article number			
 of gS fuse for semiconductor protection at NH design usable 	<u>3NE1802-0</u>		
 of full range R fuse link for semiconductor protection at cylindrical design usable 	<u>5SE1350</u>		
 of back-up R fuse link for semiconductor protection at NH design usable 	3NE8017-1		
 of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable 	<u>3NC1450</u>		
 of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable 	3NC2280		
manufacturer's article number of the gG fuse			
at NH design usable	3NA6812: These fuses have a smaller rated current than the semiconductor relays		
• at cylindrical design 14 x 51 mm usable	3NW6112-1: These fuses have a smaller rated current than the semiconductor relays		
• at cylindrical design 22 x 58 mm usable	3NW6212-1: These fuses have a smaller rated current than the semiconductor relays		
manufacturer's article number			
of DIAZED fuse usable	5SB4111: These fuses have a smaller rated current that relays	n the semiconductor	
of NEOZED fuse usable	5SE2335: These fuses have a smaller rated current than the semiconductor relays		
Approvals Certificates			
		EMV	
General Product Approval		EMV	





Confirmation







Test Certificates

other

Environment

Type Test Certificates/Test Report Confirmation



Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2340-3AA04


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2340-3AA04


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RF2340-3AA04

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2340-3AA04&lang=en

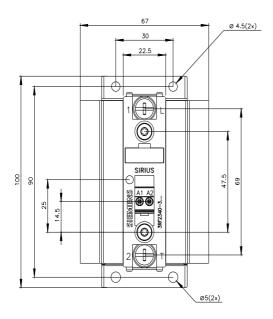

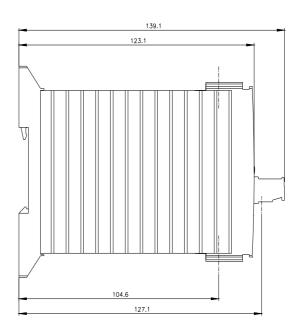

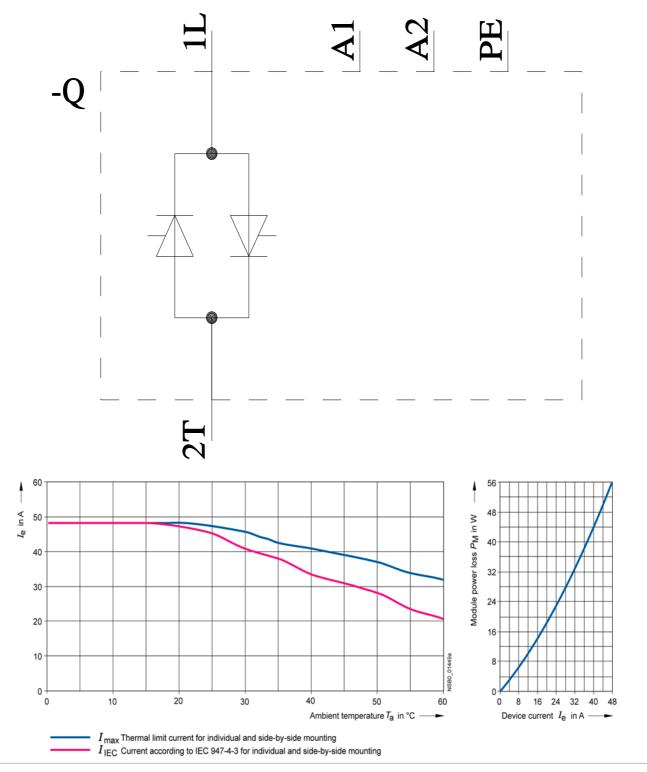

last modified: 8/12/2024 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RF23403AA04