## **SIEMENS**

Data sheet 3RF2350-3AA04



Solid-state contactor 1-phase 3RF2 AC 51 / 50 A / 40  $^{\circ}\text{C}$  48-460 V / 24 V DC Ring cable connection

product brand name	SIRIUS
product designation	solid-state contactor
design of the product	single-phase
product type designation	3RF23
manufacturer's article number	
<ul><li>_1 of the accessories that can be ordered</li></ul>	3RF2900-3PA88
<ul><li>_3 of the accessories that can be ordered</li></ul>	3RF2900-0EA18
<ul><li>_4 of the accessories that can be ordered</li></ul>	3RF2950-0GA16
product designation	
<ul><li>_1 of the accessories that can be ordered</li></ul>	terminal cover
<ul><li>_3 of the accessories that can be ordered</li></ul>	converter
<ul><li>_4 of the accessories that can be ordered</li></ul>	load monitoring
General technical data	
product function	zero-point switching
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	54 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	54 W
<ul> <li>without load current share typical</li> </ul>	0.4 W
insulation voltage rated value	600 V
degree of pollution	3
type of voltage	
<ul> <li>of the operating voltage</li> </ul>	AC
<ul> <li>of the control supply voltage</li> </ul>	DC
surge voltage resistance of main circuit rated value	6 kV
protection class IP	IP00
protection class IP on the front according to IEC 60529	IP00
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	07/01/2006
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4
Weight	0.453 kg
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
type of voltage of the operating voltage	AC
operating voltage	
• at AC	

— at 50 Hz rated value	48 460 V
— at 60 Hz rated value	48 460 V
operating frequency rated value	50 60 Hz
operating range relative to the operating voltage at AC	
● at 50 Hz	40 506 V
● at 60 Hz	40 506 V
operational current	
<ul> <li>at AC-51 rated value</li> </ul>	50 A
<ul><li>at AC-51 according to IEC 60947-4-3</li></ul>	36 A
according to UL 508 rated value	45 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/μs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	1 150 A
I2t value maximum	6 600 A²-s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1 at DC rated value maximum permissible	30 V
control supply voltage 1 at DC	15 24 V
control supply voltage	
at DC initial value for signal <1> detection	15 V
at DC full-scale value for signal<0> recognition	5 V
control current at minimum control supply voltage	
• at DC	13 mA
control current at DC rated value	15 mA
ON-delay time	1 ms; additionally max. one half-wave
OFF-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
Auxiliary circuit type of switching contact	normally open contact (NO)
Auxiliary circuit type of switching contact number of NC contacts for auxiliary contacts	normally open contact (NO)
Auxiliary circuit  type of switching contact  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts	normally open contact (NO) 0
Auxiliary circuit  type of switching contact  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of CO contacts for auxiliary contacts	normally open contact (NO)
Auxiliary circuit  type of switching contact  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  lnstallation/ mounting/ dimensions	normally open contact (NO) 0 0 0
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  linstallation/ mounting/ dimensions fastening method side-by-side mounting	normally open contact (NO) 0 0 0 Ves
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  linstallation/ mounting/ dimensions fastening method side-by-side mounting fastening method	normally open contact (NO)  0  0  Ves screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment	normally open contact (NO)  0  0  Ves screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4
Auxiliary circuit  type of switching contact  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions  fastening method side-by-side mounting  fastening method  design of the thread of the screw for securing the equipment  height	normally open contact (NO)  0  0  Yes  screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm
Auxiliary circuit  type of switching contact  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  lnstallation/ mounting/ dimensions  fastening method side-by-side mounting  fastening method  design of the thread of the screw for securing the equipment  height  width	normally open contact (NO)  0  0  Yes  screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm  67 mm
Auxiliary circuit  type of switching contact  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  lnstallation/ mounting/ dimensions  fastening method side-by-side mounting  fastening method  design of the thread of the screw for securing the equipment  height  width  depth	normally open contact (NO)  0  0  Yes  screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm
Auxiliary circuit  type of switching contact  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  lnstallation/ mounting/ dimensions  fastening method side-by-side mounting  fastening method  design of the thread of the screw for securing the equipment  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and	normally open contact (NO)  0  0  Yes  screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm  67 mm
type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	normally open contact (NO)  0  0  Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm  67 mm  141 mm
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment height width depth  Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	normally open contact (NO)  0  0  Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm 67 mm 141 mm
Auxiliary circuit  type of switching contact  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  lnstallation/ mounting/ dimensions  fastening method side-by-side mounting  fastening method  design of the thread of the screw for securing the equipment  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit	normally open contact (NO)  0  0  Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm 67 mm 141 mm  Yes  Ring cable lug connection
Auxiliary circuit  type of switching contact  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  lnstallation/ mounting/ dimensions  fastening method side-by-side mounting  fastening method  design of the thread of the screw for securing the equipment  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit	normally open contact (NO)  0  0  Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm 67 mm 141 mm
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit • for auxiliary and control circuit  type of connectable conductor cross-sections	normally open contact (NO)  0  0  Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm 67 mm 141 mm  Yes  Ring cable lug connection ring terminal lug connection
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit • for auxiliary and control circuit  type of connectable conductor cross-sections • for main contacts for JIS cable lug	normally open contact (NO)  0  0  1  Yes  screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm  67 mm  141 mm  Yes  Ring cable lug connection ring terminal lug connection
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit • for auxiliary and control circuit  type of connectable conductor cross-sections • for main contacts for JIS cable lug • for DIN cable lug for main contacts	normally open contact (NO)  0  0  Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm 67 mm 141 mm  Yes  Ring cable lug connection ring terminal lug connection
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment height width depth  Connections/ Terminals product component removable terminal for auxiliary and control circuit  type of electrical connection	normally open contact (NO)  0  0  1  Yes  screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm  67 mm  141 mm  Yes  Ring cable lug connection ring terminal lug connection
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection	normally open contact (NO)  0  0  Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm 67 mm 141 mm  Yes  Ring cable lug connection ring terminal lug connection JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5 DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection	normally open contact (NO)  0  0  Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm 67 mm 141 mm  Yes  Ring cable lug connection ring terminal lug connection  JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5 DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25  1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	normally open contact (NO)  0  0  Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm 67 mm 141 mm  Yes  Ring cable lug connection ring terminal lug connection  JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5 DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25  1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	normally open contact (NO)  0  0  1  Yes  screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm  67 mm  141 mm  Yes  Ring cable lug connection  ring terminal lug connection  JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5  DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25  1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
Auxiliary circuit  type of switching contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions fastening method side-by-side mounting fastening method  design of the thread of the screw for securing the equipment height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	normally open contact (NO)  0  0  Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715  M4  100 mm 67 mm 141 mm  Yes  Ring cable lug connection ring terminal lug connection  JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5 DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25  1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)

<ul> <li>for main contacts with screw-type terminals</li> </ul>	2 2.5 N·m
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	0.5 0.6 N·m
tightening torque [lbf·in]	
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	4.5 5.3 lbf·in
design of the thread of the connection screw	
<ul> <li>for main contacts</li> </ul>	M5
<ul> <li>of the auxiliary and control contacts</li> </ul>	M3
stripped length of the cable	
<ul> <li>for main contacts</li> </ul>	10 mm
<ul> <li>for auxiliary and control contacts</li> </ul>	10 mm
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00; IP20 with cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
Electromagnetic compatibility	
conducted interference	
<ul> <li>due to burst according to IEC 61000-4-4</li> </ul>	2 kV / 5 kHz behavior criterion 2
<ul> <li>due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV behavior criterion 2
<ul> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV behavior criterion 2
<ul> <li>due to high-frequency radiation according to IEC 61000- 4-6</li> </ul>	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1
field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions according to CISPR11	Class A for industrial environment
field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments
Short-circuit protection, design of the fuse link	
manufacturer's article number	
<ul> <li>of gS fuse for semiconductor protection at NH design usable</li> </ul>	3NE1817-0
<ul> <li>of full range R fuse link for semiconductor protection at cylindrical design usable</li> </ul>	<u>5SE1363</u>
<ul> <li>of back-up R fuse link for semiconductor protection at NH design usable</li> </ul>	3NE1817-0
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li> </ul>	3NC1450
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li> </ul>	3NC2280
manufacturer's article number	
• of NEOZED fuse usable	5SE2335: These fuses have a smaller rated current than the semiconductor relays
Approvals Cortificates	

Approvals Certificates

General Product Approval





Confirmation







EMV

Test Certificates oth

Environment

Type Test Certificates/Test Report

Confirmation



Environmental Confirmations

## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)


Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2350-3AA04


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2350-3AA04

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF2350-3AA04&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF2350-3AA04&lang=en</a>





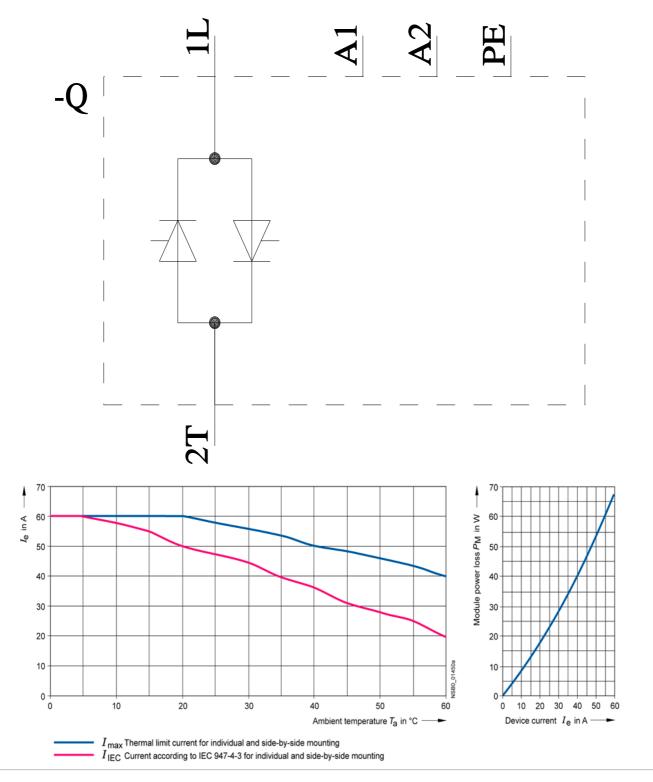

last modified:

8/12/2024

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RF23503AA04