



Figure similar

RS1-X for ET 200S Standard reversing starter expandable Setting range 0.55...0.8 A, AC-3, 0.21 kW / 400 V Electromechanical starter for brake control module

product brand name	SIMATIC
product designation	Motor starters
design of the product	reversing starter
product type designation	ET 200S
<b>General technical data</b>	
product function on-site operation	Yes
insulation voltage rated value	500 V
degree of pollution	3 at 400 V, 2 at 500 V according to IEC60664 (IEC61131)
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between main and auxiliary circuit	400 V
shock resistance	5g / 11 ms
vibration resistance	2g
operating frequency maximum	750 1/h
mechanical service life (operating cycles) of the main contacts typical	100 000
type of assignment	2
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/26/2016
product function	
• direct start	No
• reverse starting	Yes
product component motor brake output	Yes
product feature	
• brake control with 230 V AC	No
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
product extension braking module for brake control	Yes
product function short circuit protection	Yes
design of short-circuit protection	circuit-breakers
maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	50 kA
<b>Electromagnetic compatibility</b>	
EMC emitted interference according to IEC 60947-1	CISPR11, ambience A (industrial sector)
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3, ambience A (industrial sector)
conducted interference	
• due to burst according to IEC 61000-4-4	2 kV on voltage supply, inputs and outputs
• due to conductor-earth surge according to IEC 61000-4-5	2 kV (U > 24 V DC)
• due to conductor-conductor surge according to IEC	1 kV (U > 24 V DC)

61000-4-5	
<b>field-based interference according to IEC 61000-4-3</b>	80 MHz ... 1 GHz 10 V/m, 1.4 GHz ... 2 Hz 3 V/m, 2 GHz ... 2.7 GHz 1 V/m
<b>Safety related data</b>	
B10 value with high demand rate according to SN 31920	1 000 000
<b>proportion of dangerous failures</b>	
• with low demand rate according to SN 31920	50 %
• with high demand rate according to SN 31920	75 %
<b>failure rate [FIT]</b>	
• with low demand rate according to SN 31920	100 FIT
<b>protection class IP on the front according to IEC 60529</b>	IP20
<b>touch protection on the front according to IEC 60529</b>	finger-safe
<b>Main circuit</b>	
<b>number of poles for main current circuit</b>	3
<b>design of the switching contact</b>	electromechanical
<b>adjustable current response value current of the current-dependent overload release</b>	0.55 ... 0.8 A
<b>type of the motor protection</b>	bimetal
operating voltage rated value	200 ... 400 V
<b>operating frequency 1 rated value</b>	50 Hz
<b>operating frequency 2 rated value</b>	60 Hz
<b>relative positive tolerance of the operating frequency</b>	10 %
<b>relative negative tolerance of the operating frequency</b>	10 %
operating range relative to the operating voltage at AC at 50 Hz	200 ... 440 V
<b>operational current</b>	
• at AC-3 at 400 V rated value	0.8 A
operating power at AC-3 at 400 V rated value	0.21 kW
operating power for 3-phase motors at 400 V at 50 Hz	0.21 ... 0.21 kW
<b>Inputs/ Outputs</b>	
<b>product function</b>	
• digital inputs parameterizable	No
• digital outputs parameterizable	No
<b>number of digital inputs</b>	0
<b>number of sockets</b>	
• for digital output signals	0
• for digital input signals	0
<b>Supply voltage</b>	
<b>type of voltage of the supply voltage</b>	DC
<b>supply voltage 1 at DC</b>	24 ... 24 V
<b>supply voltage 1 at DC rated value</b>	
• minimum permissible	20.4 V
• maximum permissible	28.8 V
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	DC
control supply voltage at DC rated value	20.4 ... 28.8 V
<b>control supply voltage 1</b>	
• at DC rated value	20.4 ... 28.8 V
• at DC	24 ... 24 V
<b>power loss [W] in auxiliary and control circuit</b>	
• <b>in switching state OFF</b>	
— with bypass circuit	0.3744 W
— without bypass circuit	0.374 W
• <b>in switching state ON</b>	
— with bypass circuit	4.1184 W
— without bypass circuit	4.118 W
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	vertical, horizontal
<b>fastening method</b>	pluggable on terminal module
<b>height</b>	265 mm
<b>width</b>	90 mm
<b>depth</b>	120 mm

Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity during operation	5 ... 95 %

Communication/ Protocol	
<b>protocol is supported</b>	
• PROFIBUS DP protocol	Yes
• PROFINET protocol	Yes
design of the interface PROFINET protocol	Yes
<b>product function bus communication</b>	Yes
protocol is supported AS-Interface protocol	No
<b>product function</b>	
• supports PROFenergy measured values	No
• supports PROFenergy shutdown	No
<b>address space memory of address range</b>	
• of the inputs	1 byte
• of the outputs	1 byte
<b>type of electrical connection</b>	
• of the communication interface	via backplane bus
• for communication transmission	via backplane bus

Connections/ Terminals	
type of electrical connection for main current circuit	screw-type terminals
<b>type of electrical connection</b>	
• 1 for digital input signals	using control module
• 2 for digital input signals	using control module
<b>type of electrical connection</b>	
• at the manufacturer-specific device interface	plug
• for main energy infeed	screw-type terminals
• for load-side outgoing feeder	Screw-type terminals
• for main energy transmission	via energy bus
• for supply voltage line-side	via backplane bus
• for supply voltage transmission	via backplane bus

UL/CSA ratings	
operating voltage at AC at 60 Hz according to CSA and UL rated value	600 V

Certificates/ approvals	
General Product Approval	EMC



[Confirmation](#)



For use in hazardous locations	Declaration of Conformity	other	Dangerous Good
--------------------------------	---------------------------	-------	----------------



[Confirmation](#)

[Transport Information](#)

#### Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1301-0HB00-1AA2>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1301-0HB00-1AA2>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1301-0HB00-1AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1301-0HB00-1AA2&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1301-0HB00-1AA2&lang=en)

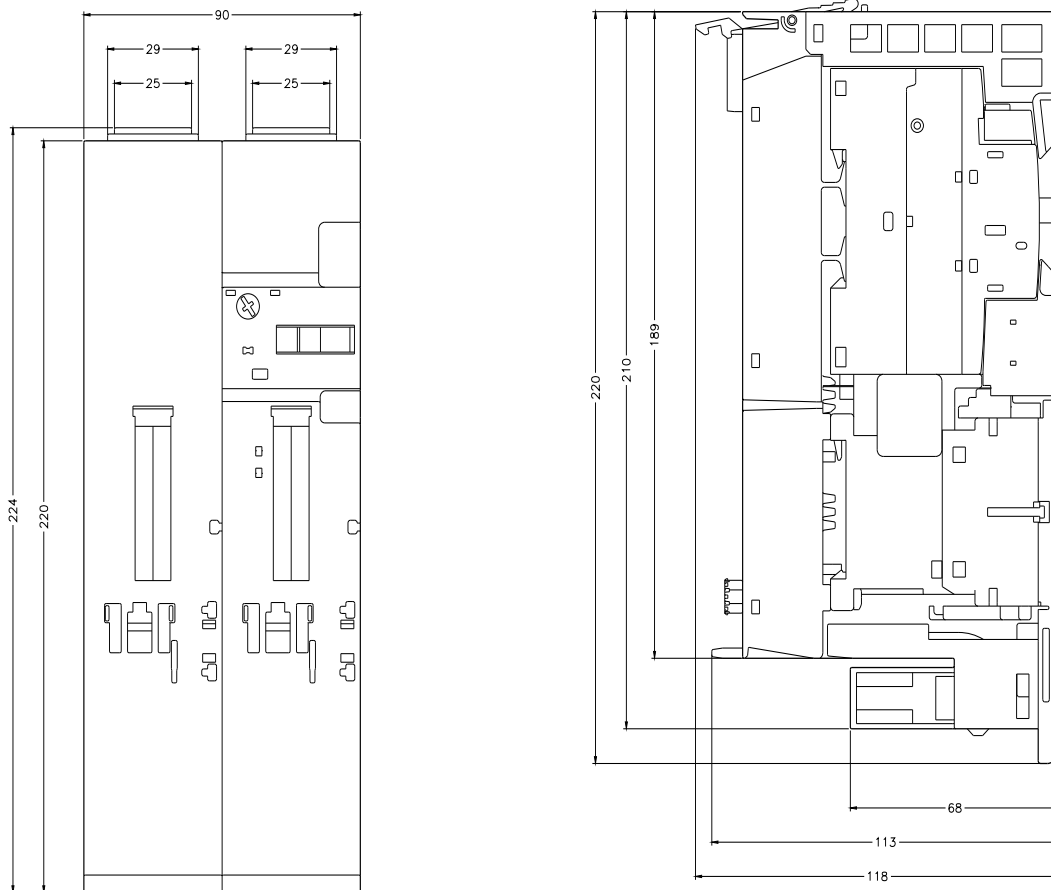

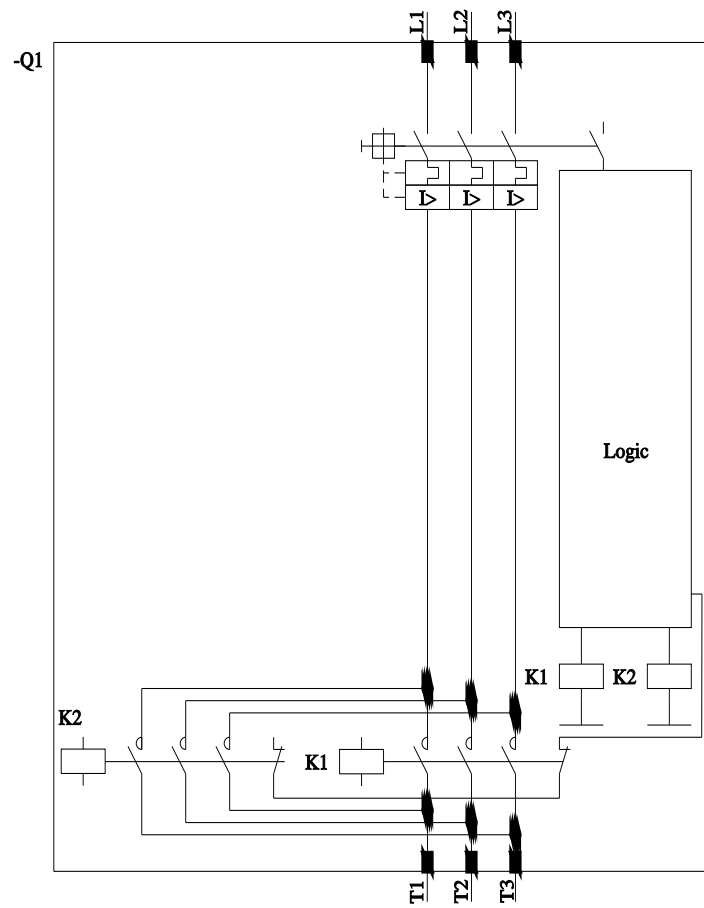

last modified:

12/15/2020

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

[3RK13010HB001AA2](#)