## SIEMENS

## Data sheet

## 3RK1301-0JB00-1AA2



RS1-X for ET 200S Standard reversing starter expandable Setting range 0.7...1.00 A AC-3, 0.25 kW / 400 V Electromechanical starter for brake control module

				1.1		2	
Fi	α	ur	e	Si	m	i	ar

product brand name	SIMATIC
product designation	Motor starters
design of the product	reversing starter
product type designation	ET 200S
General technical data	
product function on-site operation	Yes
insulation voltage rated value	500 V
degree of pollution	3 at 400 V, 2 at 500 V according to IEC60664 (IEC61131)
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between main and auxiliary circuit	400 V
shock resistance	5g / 11 ms
vibration resistance	2g
operating frequency maximum	750 1/h
mechanical service life (operating cycles) of the main contacts typical	100 000
type of assignment	2
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/26/2016
product function	
direct start	No
reverse starting	Yes
product component motor brake output	Yes
product feature	
<ul> <li>brake control with 230 V AC</li> </ul>	No
<ul> <li>brake control with 24 V DC</li> </ul>	No
<ul> <li>brake control with 180 V DC</li> </ul>	No
<ul> <li>brake control with 500 V DC</li> </ul>	No
product extension braking module for brake control	Yes
product function short circuit protection	Yes
design of short-circuit protection	circuit-breakers
maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	50 kA
Electromagnetic compatibility	
EMC emitted interference according to IEC 60947-1	CISPR11, ambience A (industrial sector)
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3, ambience A (industrial sector)
conducted interference	
<ul> <li>due to burst according to IEC 61000-4-4</li> </ul>	2 kV on voltage supply, inputs and outputs
<ul> <li>due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV (U > 24 V DC)
<ul> <li>due to conductor-conductor surge according to IEC</li> </ul>	1 kV (U > 24 V DC)

61000-4-5	
field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, 1.4 GHz2 Hz 3 V/m, 2 GHz 2.7 GHz 1 V/m
Safety related data	
	4 000 000
B10 value with high demand rate according to SN 31920 proportion of dangerous failures	1 000 000
	50 %
with low demand rate according to SN 31920	
with high demand rate according to SN 31920	75 %
failure rate [FIT]	
with low demand rate according to SN 31920	100 FIT
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe
Main circuit	2
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current- dependent overload release	0.7 1 A
type of the motor protection	bimetal
operating voltage rated value	200 400 V
operating frequency 1 rated value	50 Hz
operating frequency 2 rated value	60 Hz
relative positive tolerance of the operating frequency	10 %
relative negative tolerance of the operating frequency	10 %
operating range relative to the operating voltage at AC at 50 Hz	200 440 V
operational current	
• at AC-3 at 400 V rated value	1 A
operating power at AC-3 at 400 V rated value	0.35 kW
operating power for 3-phase motors at 400 V at 50 Hz	0.35 0.35 kW
Inputs/ Outputs	
product function	
<ul> <li>digital inputs parameterizable</li> </ul>	No
<ul> <li>digital outputs parameterizable</li> </ul>	No
number of digital inputs	0
number of sockets	
<ul> <li>for digital output signals</li> </ul>	0
<ul> <li>for digital input signals</li> </ul>	0
Supply voltage	
type of voltage of the supply voltage	DC
supply voltage 1 at DC	24 24 V
supply voltage 1 at DC rated value	
minimum permissible	20.4 V
maximum permissible	28.8 V
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	20.4 28.8 V
control supply voltage 1	
• at DC rated value	20.4 28.8 V
• at DC	24 24 V
power loss [W] in auxiliary and control circuit	
<ul> <li>in switching state OFF</li> </ul>	
— with bypass circuit	0.3744 W
<ul> <li>— without bypass circuit</li> </ul>	0.374 W
<ul> <li>in switching state ON</li> </ul>	
— with bypass circuit	4.1184 W
— without bypass circuit	4.118 W
Installation/ mounting/ dimensions	
mounting position	vertical, horizontal
fastening method	pluggable on terminal module
height	265 mm
width	90 mm
depth	120 mm

Ambient conditions				
installation altitude at height above sea level maximum	2 000 m			
ambient temperature				
during operation	0 60 °C			
during storage	-40 +70 °C			
during transport	-40 +70 °C			
relative humidity during operation	5 95 %			
Communication/ Protocol				
protocol is supported				
PROFIBUS DP protocol	Yes			
PROFINET protocol	Yes			
design of the interface PROFINET protocol	Yes			
product function bus communication	Yes			
protocol is supported AS-Interface protocol	No			
product function				
supports PROFlenergy measured values	No			
supports PROFlenergy shutdown	No			
address space memory of address range				
of the inputs	1 byte			
• of the outputs	1 byte			
type of electrical connection	Toyle			
of the communication interface	via backplane bus			
for communication transmission	via backplane bus			
Connections/ Terminals				
type of electrical connection for main current circuit	screw-type terminals			
type of electrical connection	sciew-type terminals			
1 for digital input signals	using control module			
	using control module			
2 for digital input signals     type of electrical connection				
	plug			
<ul> <li>at the manufacturer-specific device interface</li> <li>for main energy infeed</li> </ul>	screw-type terminals			
for load-side outgoing feeder	Screw-type terminals			
for main energy transmission	via energy bus			
for supply voltage line-side	via backplane bus			
for supply voltage transmission	via backplane bus			
UL/CSA ratings				
	(00)/			
operating voltage at AC at 60 Hz according to CSA and UL rated value	600 V			
Certificates/ approvals				
General Product Approval	EMC			
Conoral Froudol Approval				
<u>Confirmation</u>				
	) (կ) ԼԱՐ /Ծծ			
CSA CCC				
For use in hazard-				
ous locations Declaration of Conformity	other Dangerous Good			
εγ ce Uk	Confirmation Transport Information			
	-			
Further information				
Further information				

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...) <a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a>

Industry Mall (Online ordering system)

https://mail.industry.siemens.com/mail/en/en/Catalog/product?mlfb=3RK1301-0JB00-1AA2


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1301-0JB00-1AA2


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RK1301-0JB00-1AA2

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RK1301-0JB00-1AA2&lang=en

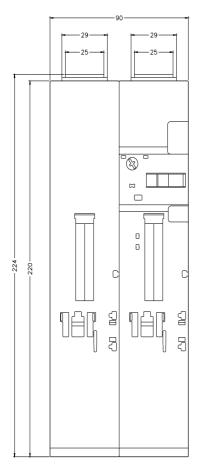

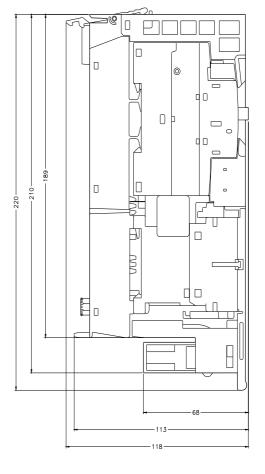

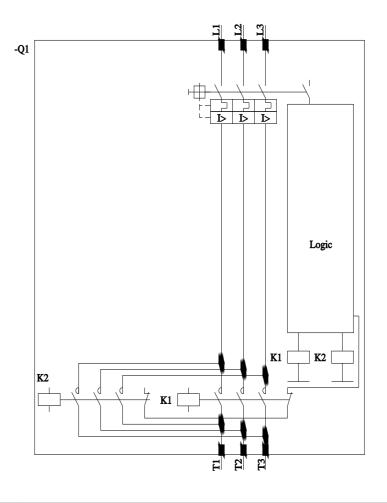

last modified:

12/15/2020 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RK13010JB001AA2