3RK1304-0HS00-7AA0

Data sheet



ET 200pro F-RSM Safety local Maintenance switch module Up to 16 A Disconnector function for Main circuit and safety evaluation functions Han Q4/2

product brand name	SIMATIC
product designation	Motor starters
design of the product	safety local isolator module
product type designation	ET 200pro
General technical data	
product function on-site operation	Yes
insulation voltage rated value	400 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between main and auxiliary circuit	400 V
protection class IP	IP65
shock resistance	15g / 11 ms
vibration resistance	2g
type of assignment	1
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/28/2009
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 Bleititanzirkonoxid - 12626-81-2
product component motor brake output	No
product feature	
 brake control with 230 V AC 	No
 brake control with 400 V AC 	No
 brake control with 24 V DC 	No
 brake control with 180 V DC 	No
 brake control with 500 V DC 	No
product function short circuit protection	Yes
design of short-circuit protection	circuit-breakers
maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	50 000 A
Safety related data	
safety device type according to IEC 61508-2	Туре В
safe state	Load circuit open
Safety Integrity Level (SIL) according to IEC 61508	3
SIL Claim Limit (subsystem) according to EN 62061	SILCL 3
performance level (PL) according to EN ISO 13849-1	e
category according to EN ISO 13849-1	4
stop category according to EN 60204-1	0
average diagnostic coverage level (DCavg)	99 %
PFHD with high demand rate according to EN 62061	5.35E-11 1/h

Safe failure fraction (SFF)	99 %
MTTFd	100 a
hardware fault tolerance according to IEC 61508	1
touch protection against electrical shock	finger-safe
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-	16 16 A
dependent overload release	
type of voltage	AC
operating voltage rated value	200 400 V
operating frequency 1 rated value	50 Hz
operating frequency 2 rated value	60 Hz
relative positive tolerance of the operating frequency	10 %
relative negative tolerance of the operating frequency	15 %
operating range relative to the operating voltage at AC at 50 Hz	200 440 V
operational current	
 at AC at 400 V rated value 	16 A
 at AC-3 at 400 V rated value 	16 A
• at AC-3e at 400 V rated value	16 A
operating power	
• at AC-3 at 400 V rated value	7 500 W
• at AC-3e at 400 V rated value	7 500 W
operating power for 3-phase motors at 400 V at 50 Hz	0 7 500 W
Inputs/ Outputs	
product function	
digital inputs parameterizable	No
digital outputs parameterizable	No
number of digital inputs	2
number of sockets	
for digital output signals	0
for digital input signals	2
	-
Supply voltage	
Supply voltage	DC .
type of voltage of the supply voltage	DC 24 24 V
type of voltage of the supply voltage supply voltage 1 at DC	DC 24 24 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible	24 24 V 20.4 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible	24 24 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control	24 24 V 20.4 V 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage	24 24 V 20.4 V 28.8 V DC
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value	24 24 V 20.4 V 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V any
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position fastening method	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V any screw fixing
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position fastening method height	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V any screw fixing 230 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position fastening method	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V any screw fixing
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position fastening method height width depth	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V any screw fixing 230 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position fastening method height width	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position fastening method height width depth	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position fastening method height width depth Ambient conditions	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm 170 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm 170 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm 170 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position fastening method height width depth Ambient conditions installation altitude at height above sea level maximum ambient temperature • during operation	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm 170 mm 3 500 m
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position fastening method height width depth Ambient conditions installation altitude at height above sea level maximum ambient temperature • during operation • during storage	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm 170 mm 3 500 m -25 +55 °C -40 +70 °C
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position fastening method height width depth Ambient conditions installation altitude at height above sea level maximum ambient temperature • during operation • during storage • during transport	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm 170 mm 3 500 m -25 +55 °C -40 +70 °C -40 +70 °C
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm 170 mm 3 500 m -25 +55 °C -40 +70 °C -40 +70 °C
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm 170 mm 3 500 m -25 +55 °C -40 +70 °C -40 +70 °C
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC Installation/ mounting/ dimensions mounting position fastening method height width depth Ambient conditions installation altitude at height above sea level maximum ambient temperature • during operation • during storage • during transport relative humidity during operation Communication/ Protocol protocol is supported	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm 170 mm 3 500 m -25 +55 °C -40 +70 °C -40 +70 °C 5 95 %
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V any screw fixing 230 mm 110 mm 170 mm 3 500 m -25 +55 °C -40 +70 °C -40 +70 °C 5 95 %

PROFIsafe protocol	No
design of the interface PROFINET protocol	Yes
product function bus communication	Yes
protocol is supported AS-Interface protocol	No
product function	
 supports PROFlenergy measured values 	No
 supports PROFlenergy shutdown 	No
address space memory of address range	
of the inputs	1 byte
• of the outputs	0 byte
type of electrical connection of the communication interface	via backplane bus
Connections/ Terminals	
type of electrical connection	
for main current circuit	tab terminals
type of electrical connection	
 1 for digital input signals 	M12 socket
 2 for digital input signals 	M12 socket
 3 for digital input signals 	M12 socket
4 for digital input signals	M12 socket
type of electrical connection	
 at the manufacturer-specific device interface 	optical interface
 for main energy infeed 	socket according to ISO23570
 for load-side outgoing feeder 	socket according to ISO23570
 for main energy transmission 	socket according to ISO23570
 for supply voltage line-side 	via backplane bus
 for supply voltage transmission 	via backplane bus
UL/CSA ratings	
operating voltage at AC at 60 Hz according to CSA and UL rated value	600 V
Certificates/ approvals	

Certificates/ approvals

General Product Approval

EMC

Declaration of Conformity



Confirmation









Test Certificates

other

Type Test Certificates/Test Report

Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

om/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-0HS00-7AA0

Cax online generator


nation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-0HS00-7AA0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-0HS00-7AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-0HS00-7AA0&lang=en

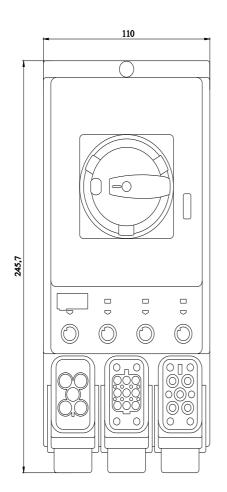

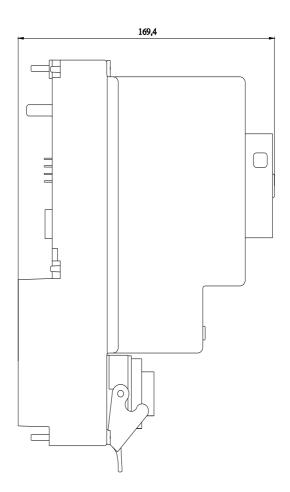

last modified: 8/7/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RK13040HS007AA0