



Figure similar

ET 200pro DSE HF DOL starter High Feature Mechanical switching Electronic overload protection AC-3, 5.5 kW / 400 V 1.50 A...12.00 A Brake contact 400 V AC 4 DI Han Q4/2 - Han Q8/0

| | |
|--|--|
| product brand name | SIMATIC |
| product designation | Motor starters |
| design of the product | direct starter |
| product type designation | ET 200pro |
| General technical data | |
| product function on-site operation | Yes |
| insulation voltage rated value | 400 V |
| degree of pollution | 3 |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for protective separation between main and auxiliary circuit | 400 V |
| protection class IP | IP65 |
| shock resistance | 15g / 11 ms |
| vibration resistance | 2g |
| mechanical service life (operating cycles) of the main contacts typical | 30 000 000 |
| type of assignment | 1 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 05/01/2012 |
| SVHC substance name | Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 Bleitanzirkonoxid - 12626-81-2 2,2',6,6'-Tetrabrom-4,4'-isopropylidendi - 79-94-7 |
| product function | |
| • direct start | Yes |
| • reverse starting | No |
| product component motor brake output | Yes |
| product feature | |
| • brake control with 230 V AC | No |
| • brake control with 400 V AC | Yes |
| • brake control with 24 V DC | No |
| • brake control with 180 V DC | No |
| • brake control with 500 V DC | No |
| type of voltage of the supply voltage for brake control required | AC |
| supply voltage for brake control required | 400 V |
| product function short circuit protection | Yes |
| design of short-circuit protection | fuse |
| maximum short-circuit current breaking capacity (Icu) | |
| • at 400 V rated value | 100 000 A |
| Safety related data | |

| | |
|--|----------------------|
| B10 value with high demand rate according to SN 31920 | 1 000 000 |
| proportion of dangerous failures | |
| • with low demand rate according to SN 31920 | 50 % |
| • with high demand rate according to SN 31920 | 75 % |
| failure rate [FIT] | |
| • with low demand rate according to SN 31920 | 100 FIT |
| touch protection against electrical shock | finger-safe |
| Main circuit | |
| number of poles for main current circuit | 3 |
| design of the switching contact | electromechanical |
| adjustable current response value current of the current-dependent overload release | 1.5 ... 12 A |
| type of the motor protection | solid-state |
| type of voltage | AC |
| operating voltage rated value | 200 ... 400 V |
| operating range relative to the operating voltage at AC at 50 Hz | 200 ... 440 V |
| operational current | |
| • at AC at 400 V rated value | 12 A |
| • at AC-3 at 400 V rated value | 12 A |
| operating power | |
| • at AC-3 at 400 V rated value | 5 500 W |
| operating power for 3-phase motors at 400 V at 50 Hz | 700 ... 5 500 W |
| Inputs/ Outputs | |
| product function | |
| • digital inputs parameterizable | Yes |
| • digital outputs parameterizable | No |
| number of digital inputs | 4 |
| number of sockets | |
| • for digital output signals | 0 |
| • for digital input signals | 4 |
| Supply voltage | |
| type of voltage of the supply voltage | DC |
| supply voltage 1 at DC | 24 ... 24 V |
| supply voltage 1 at DC rated value | |
| • minimum permissible | 20.4 V |
| • maximum permissible | 28.8 V |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | DC |
| control supply voltage at DC rated value | 20.4 ... 28.8 V |
| control supply voltage 1 | |
| • at DC rated value | 20.4 ... 28.8 V |
| • at DC | 24 ... 24 V |
| power loss [W] in auxiliary and control circuit | |
| • in switching state OFF | |
| — with bypass circuit | 1.6416 W |
| — without bypass circuit | 1.656 W |
| • in switching state ON | |
| — with bypass circuit | 3.888 W |
| — without bypass circuit | 3.888 W |
| Installation/ mounting/ dimensions | |
| mounting position | vertical, horizontal |
| fastening method | screw fixing |
| height | 230 mm |
| width | 110 mm |
| depth | 150 mm |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 3 500 m |
| ambient temperature | |
| • during operation | -25 ... +55 °C |
| • during storage | -40 ... +70 °C |
| • during transport | -40 ... +70 °C |

| | |
|--|-------------------|
| relative humidity during operation | 5 ... 95 % |
| Communication/ Protocol | |
| protocol is supported | |
| • PROFIBUS DP protocol | Yes |
| • PROFINET protocol | Yes |
| design of the interface PROFINET protocol | Yes |
| product function bus communication | Yes |
| protocol is supported AS-Interface protocol | No |
| product function | |
| • supports PROFinenergy measured values | Yes |
| • supports PROFinenergy shutdown | Yes |
| address space memory of address range | |
| • of the inputs | 2 byte |
| • of the outputs | 2 byte |
| type of electrical connection of the communication interface | via backplane bus |

| | |
|---|------------------------------|
| Connections/ Terminals | |
| type of electrical connection | |
| • for main current circuit | tab terminals |
| type of electrical connection | |
| • 1 for digital input signals | M12 socket |
| • 2 for digital input signals | M12 socket |
| • 3 for digital input signals | M12 socket |
| • 4 for digital input signals | M12 socket |
| type of electrical connection | |
| • at the manufacturer-specific device interface | optical interface |
| • for main energy infeed | socket according to ISO23570 |
| • for load-side outgoing feeder | socket according to ISO23570 |
| • for main energy transmission | socket according to ISO23570 |
| • for supply voltage line-side | via backplane bus |
| • for supply voltage transmission | via backplane bus |

| | |
|--|-------|
| UL/CSA ratings | |
| operating voltage at AC at 60 Hz according to CSA and UL rated value | 600 V |

| | | |
|---------------------------------|------------|--|
| Certificates/ approvals | | |
| General Product Approval | EMC | Declaration of Con- formity |



[Confirmation](#)



| | | | |
|--|--------------------------|--------------|-----------------------|
| Declaration of Con- formity | Test Certificates | other | Dangerous Good |
|--|--------------------------|--------------|-----------------------|



[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Transport Information](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)


<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5LS40-2AA3>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-5LS40-2AA3>

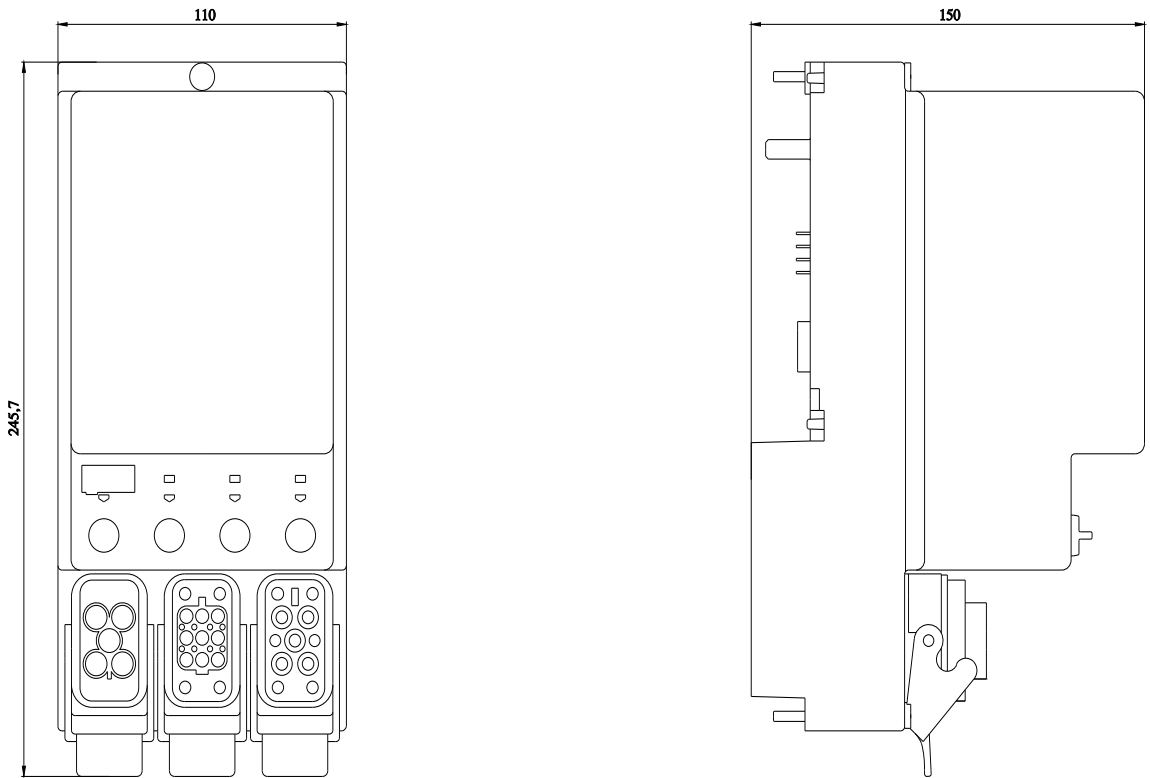

last modified:

8/7/2023 

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

[3RK13045LS402AA3](#)