# **SIEMENS**

#### **Data sheet**

### 3RK1308-0DA00-0CP0



Failsafe reversing starter High Feature; Electronic switching; Electronic overload protection up to 0.09 kW / 400 V; Adjustment range 0.1 .. 0.4 A; PROFlenergy; Option: 3DI/LC module

Figure similar

product brand name	SIMATIC
product category	Motor starter
product designation	Reversing starter
product type designation	ET 200SP
General technical data	
equipment variant according to IEC 60947-4-2	3
product function	Fail-safe reversing starter
on-site operation	Yes
intrinsic device protection	Yes
remote firmware update	Yes
for power supply reverse polarity protection	Yes
insulation voltage rated value	500 V
degree of pollution	2
overvoltage category	III
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
<ul> <li>between main and auxiliary circuit</li> </ul>	500 V
shock resistance	6g / 11 ms
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
operating frequency maximum	1 1/s
mechanical service life (operating cycles) of the main contacts typical	30 000 000
type of assignment	1
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	04/15/2016
product function	
direct start	Yes
reverse starting	Yes
product component motor brake output	No
product function short circuit protection	Yes
design of short-circuit protection	fuse
maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	55 kA
• at 500 V rated value	55 kA
at 500 V according to UL 60947 rated value	100 kA
maximum short-circuit current breaking capacity (Icu) in the IT network	
• at 400 V rated value	55 kA
• at 500 V rated value	55 kA
Electromagnetic compatibility	

FMO and the distriction of the second of the	-l A
EMC emitted interference according to IEC 60947-1	class A
EMC immunity according to IEC 60947-1	Class A
conducted interference	
due to burst according to IEC 61000-4-4	3 kV
due to conductor-earth surge according to IEC 61000-4-5	4 kV
<ul> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	2 kV
<ul> <li>due to high-frequency radiation according to IEC 61000- 4-6</li> </ul>	Class A
field-based interference according to IEC 61000-4-3	20 V/m
electrostatic discharge according to IEC 61000-4-2	8 kV air discharge
conducted HF interference emissions according to CISPR11	Class A for industrial environment
field-bound HF interference emission according to CISPR11	Class A for industrial environment
Safety related data	
safety device type according to IEC 61508-2	Туре В
safe state	Load circuit open
B10d value	10 100 000
Safety Integrity Level (SIL) according to IEC 61508	3
performance level (PL) according to EN ISO 13849-1	е
category according to EN ISO 13849-1	4
stop category according to EN 60204-1	0
diagnostics test interval by internal test function maximum	600 s
PFH according to IEC 61508 relating to SIL	3.6E-9 1/h
PFDavg with low demand rate according to IEC 61508	4.1E-7
hardware fault tolerance according to IEC 61508	1
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe
Main circuit	inigor outo
number of poles for main current circuit	3
design of the switching contact	Hybrid
adjustable current response value current of the current-	0.1 0.4 A
dependent overload release	
<u> </u>	50 %; from smallest adjustable rated current
minimum load [%]	50 %; from smallest adjustable rated current solid-state
minimum load [%] type of the motor protection	solid-state
minimum load [%] type of the motor protection operating voltage rated value	solid-state 48 500 V
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage	solid-state 48 500 V 10 %
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value	solid-state 48 500 V 10 % 50 Hz
minimum load [%] type of the motor protection operating voltage rated value relative symmetrical tolerance of the operating voltage operating frequency 1 rated value operating frequency 2 rated value	solid-state 48 500 V 10 % 50 Hz 60 Hz
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency	solid-state 48 500 V 10 % 50 Hz 60 Hz 5 %
minimum load [%]  type of the motor protection operating voltage rated value relative symmetrical tolerance of the operating voltage operating frequency 1 rated value operating frequency 2 rated value relative symmetrical tolerance of the operating frequency relative positive tolerance of the operating frequency	solid-state 48 500 V 10 % 50 Hz 60 Hz 5 %
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency	solid-state 48 500 V 10 % 50 Hz 60 Hz 5 % 5 %
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value	solid-state 48 500 V 10 % 50 Hz 60 Hz 5 % 5 % 5 % 0.4 A
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum	solid-state 48 500 V 10 % 50 Hz 60 Hz 5 % 5 % 5 % 0.4 A 4 A
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz	solid-state 48 500 V 10 % 50 Hz 60 Hz 5 % 5 % 5 % 0.4 A
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs	solid-state 48 500 V 10 % 50 Hz 60 Hz 5 % 5 % 5 % 0.4 A 4 A 0.06 0.12 kW
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs	solid-state 48 500 V 10 % 50 Hz 60 Hz 5 % 5 % 5 % 0.4 A 4 A 0.06 0.12 kW
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  0.4 A  4 A  0.06 0.12 kW
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  0.4 A  4 A  0.06 0.12 kW
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related  type of input characteristic	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  0.4 A  4 A  0.06 0.12 kW
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related  type of input characteristic  input voltage at digital input	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  0.4 A  4 A  0.06 0.12 kW   5  4 via 3DI/LC module  1  Type 1 in accordance with EN 61131-2
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related  type of input characteristic  input voltage at digital input  • at DC rated value	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  0.4 A  4 A  0.06 0.12 kW   5  4 via 3DI/LC module  1  Type 1 in accordance with EN 61131-2
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related  type of input characteristic  input voltage at digital input  • at DC rated value  • with signal <0> at DC	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  5 %  0.4 A  4 A  0.06 0.12 kW   5  4 via 3DI/LC module  1  Type 1 in accordance with EN 61131-2  24 V  0 5 V
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related  type of input characteristic  input voltage at digital input  • at DC rated value  • with signal <0> at DC  • for signal <1> at DC	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  5 %  0.4 A  4 A  0.06 0.12 kW   5  4 via 3DI/LC module  1  Type 1 in accordance with EN 61131-2  24 V  0 5 V  15 30
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related  type of input characteristic  input voltage at digital input  • at DC rated value  • with signal <0> at DC  • for signal <1> at DC  input current at digital input for signal <1> typical	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  5 %  0.4 A  4 A  0.06 0.12 kW   5  4 via 3DI/LC module  1  Type 1 in accordance with EN 61131-2  24 V  0 5 V
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related  type of input characteristic  input voltage at digital input  • at DC rated value  • with signal <0> at DC  • for signal <1> at DC  input current at digital input for signal <1> typical  Supply voltage	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  5 %  0.4 A  4 A  0.06 0.12 kW   5  4 via 3DI/LC module  1  Type 1 in accordance with EN 61131-2  24 V  0 5 V  15 30  0.009 A
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related  type of input characteristic  input voltage at digital input  • at DC rated value  • with signal <0> at DC  • for signal <1> at DC  input current at digital input for signal <1> typical  Supply voltage  type of voltage of the supply voltage	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  5 %  0.4 A  4 A  0.06 0.12 kW   5  4 via 3DI/LC module  1  Type 1 in accordance with EN 61131-2  24 V  0 5 V  15 30
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related  type of input characteristic  input voltage at digital input  • at DC rated value  • with signal <0> at DC  • for signal <1> at DC  input current at digital input for signal <1> typical  Supply voltage	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  5 %  0.4 A  4 A  0.06 0.12 kW   5  4 via 3DI/LC module  1  Type 1 in accordance with EN 61131-2  24 V  0 5 V  15 30  0.009 A
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related  type of input characteristic  input voltage at digital input  • at DC rated value  • with signal <0> at DC  • for signal <1> at DC  input current at digital input for signal <1> typical  Supply voltage  type of voltage of the supply voltage	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  5 %  0.4 A  4 A  0.06 0.12 kW   5  4 via 3DI/LC module  1  Type 1 in accordance with EN 61131-2  24 V  0 5 V  15 30  0.009 A
minimum load [%]  type of the motor protection  operating voltage rated value  relative symmetrical tolerance of the operating voltage  operating frequency 1 rated value  operating frequency 2 rated value  relative symmetrical tolerance of the operating frequency  relative positive tolerance of the operating frequency  relative negative tolerance of the operating frequency  operational current at AC at 400 V rated value  ampacity when starting maximum  operating power for 3-phase motors at 400 V at 50 Hz  Inputs/ Outputs  number of digital inputs  • note  • safety-related  type of input characteristic  input voltage at digital input  • at DC rated value  • with signal <0> at DC  • for signal <1> at DC  input current at digital input for signal <1> typical  Supply voltage  type of voltage of the supply voltage  supply voltage 1 at DC rated value	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  5 %  0.4 A  4 A  0.06 0.12 kW   5  4 via 3DI/LC module  1  Type 1 in accordance with EN 61131-2  24 V  0 5 V  15 30  0.009 A
minimum load [%]  type of the motor protection operating voltage rated value relative symmetrical tolerance of the operating voltage operating frequency 1 rated value relative symmetrical tolerance of the operating frequency relative symmetrical tolerance of the operating frequency relative positive tolerance of the operating frequency relative negative tolerance of the operating frequency operational current at AC at 400 V rated value ampacity when starting maximum operating power for 3-phase motors at 400 V at 50 Hz Inputs/ Outputs number of digital inputs • note • safety-related type of input characteristic input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input for signal <1> typical  Supply voltage type of voltage of the supply voltage supply voltage 1 at DC rated value • minimum permissible	solid-state  48 500 V  10 %  50 Hz  60 Hz  5 %  5 %  5 %  0.4 A  4 A  0.06 0.12 kW   5  4 via 3DI/LC module  1  Type 1 in accordance with EN 61131-2  24 V  0 5 V  15 30  0.009 A

	05. 4
in standby mode of operation	95 mA
during operation	160 mA
at switching on of motor	250 mA
power loss [W] for rated value of supply voltage	
<ul> <li>in switching state OFF with bypass circuit</li> </ul>	2.3 W
in switching state ON with bypass circuit	3.8 W
inrush current peak at 24 V	25 A; Observe the manual for group configuration
duration of inrush current peak at 24 V	0.145 ms
Response times	
ON-delay time	35 ms
OFF-delay time	35 50 ms
OFF-delay time with safety-related request	
<ul> <li>when switched off via control inputs maximum</li> </ul>	55 ms
<ul> <li>when switched off via supply voltage maximum</li> </ul>	120 ms
Power Electronics	
operational current	
• at 40 °C rated value	0.4 A
• at 50 °C rated value	0.4 A
• at 55 °C rated value	0.4 A
• at 60 °C rated value	0.4 A
Installation/ mounting/ dimensions	
mounting position	Vertical, horizontal (observe derating)
fastening method	pluggable in BaseUnit
height	142 mm
width	30 mm
depth	150 mm
·	150 111111
required spacing with side-by-side mounting	FO
• upwards	50 mm
• downwards	50 mm
Ambient conditions	
installation altitude at height above sea level maximum	4 000 m; For derating see manual
ambiant tamparatura	
ambient temperature	
during operation	-25 +60 °C; For derating see manual
•	-40 +70 °C
during operation	The state of the s
during operation     during storage     during transport environmental category during operation according to IEC 60721	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices)
<ul> <li>during operation</li> <li>during storage</li> <li>during transport</li> <li>environmental category during operation according to IEC</li> </ul>	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must
during operation     during storage     during transport environmental category during operation according to IEC 60721	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices)
during operation     during storage     during transport environmental category during operation according to IEC 60721 relative humidity during operation	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 %
during operation     during storage     during transport environmental category during operation according to IEC 60721 relative humidity during operation air pressure according to SN 31205	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 %
during operation     during storage     during transport  environmental category during operation according to IEC 60721  relative humidity during operation air pressure according to SN 31205  Communication/ Protocol	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 %
during operation     during storage     during transport environmental category during operation according to IEC 60721 relative humidity during operation air pressure according to SN 31205 Communication/ Protocol protocol is supported	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa
during operation     during storage     during transport environmental category during operation according to IEC 60721 relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa
during operation     during storage     during transport  environmental category during operation according to IEC 60721  relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes
during operation     during storage     during transport  environmental category during operation according to IEC 60721  relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication	-40 +70 °C -40 +70 °C  3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices)  10 95 %  900 1 060 hPa  Yes Yes
during operation     during storage     during transport  environmental category during operation according to IEC 60721  relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication  protocol is supported AS-Interface protocol	-40 +70 °C -40 +70 °C  3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices)  10 95 %  900 1 060 hPa  Yes Yes
during operation     during storage     during transport environmental category during operation according to IEC 60721 relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication  protocol is supported AS-Interface protocol  product function	-40 +70 °C -40 +70 °C  3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices)  10 95 %  900 1 060 hPa  Yes Yes Yes No
during operation     during storage     during transport  environmental category during operation according to IEC 60721  relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication  protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes Yes No
during operation     during storage     during transport  environmental category during operation according to IEC 60721  relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication  protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown  address space memory of address range	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes Yes Yes Yes Yes
during operation     during storage     during transport  environmental category during operation according to IEC 60721  relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication  protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown  address space memory of address range     of the inputs	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes Yes Yes Yes 4 byte
during operation     during storage     during transport  environmental category during operation according to IEC 60721  relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication  protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown  address space memory of address range     of the inputs     of the outputs	-40 +70 °C -40 +70 °C  3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices)  10 95 %  900 1 060 hPa   Yes Yes Yes No  Yes Yes Yes Yes Yes Yes Yes
during operation     during storage     during transport environmental category during operation according to IEC 60721 relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown address space memory of address range     of the inputs     of the outputs  type of electrical connection of the communication interface	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes Yes Yes Yes 4 byte
during operation     during storage     during transport environmental category during operation according to IEC 60721 relative humidity during operation air pressure according to SN 31205  Communication/ Protocol protocol is supported     PROFIBUS DP protocol     PROFINET protocol product function bus communication protocol is supported AS-Interface protocol product function     supports PROFlenergy measured values     supports PROFlenergy shutdown address space memory of address range     of the inputs     of the outputs type of electrical connection of the communication interface Connections/ Terminals	-40 +70 °C -40 +70 °C  3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices)  10 95 %  900 1 060 hPa   Yes Yes Yes No  Yes Yes Yes Yes Yes Yes Yes
during operation     during storage     during transport  environmental category during operation according to IEC 60721  relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication  protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown  address space memory of address range     of the inputs     of the outputs  type of electrical connection of the communication interface  Connections/ Terminals  type of electrical connection	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes Yes No  Yes Yes Plug contact to Base Unit
during operation     during storage     during transport  environmental category during operation according to IEC 60721  relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication  protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown  address space memory of address range     of the inputs     of the outputs  type of electrical connection of the communication interface  Connections/ Terminals  type of electrical connection     of tor digital input signals	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes Yes No  Yes Yes Plug contact to Base Unit
during operation     during storage     during transport  environmental category during operation according to IEC 60721  relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication  protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown  address space memory of address range     of the inputs     of the outputs  type of electrical connection of the communication interface  Connections/ Terminals  type of electrical connection     1 for digital input signals     2 for digital input signals     2 for digital input signals	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes Yes No  Yes Yes Plug contact to Base Unit
during operation     during storage     during transport environmental category during operation according to IEC 60721 relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown address space memory of address range     of the inputs     of the outputs type of electrical connection of the communication interface  Connections/ Terminals  type of electrical connection     1 for digital input signals     2 for digital input signals type of electrical connection	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes Yes No  Yes Yes Plug contact to Base Unit  Pluggable module - accessory Plug contact to Base Unit
during operation     during storage     during transport environmental category during operation according to IEC 60721 relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown address space memory of address range     of the inputs     of the outputs  type of electrical connection of the communication interface  Connections/ Terminals  type of electrical connection     1 for digital input signals     2 for digital input signals     for main energy infeed	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes Yes No  Yes Yes Plug contact to Base Unit  Plug contact to Base Unit  Plug contact to Base Unit
during operation     during storage     during transport environmental category during operation according to IEC 60721 relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication  protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown address space memory of address range     of the inputs     of the outputs  type of electrical connection of the communication interface  Connections/ Terminals  type of electrical connection     of rodigital input signals     of romain energy infeed     for load-side outgoing feeder	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes Yes No  Yes Yes Plug contact to Base Unit
during operation     during storage     during transport environmental category during operation according to IEC 60721 relative humidity during operation air pressure according to SN 31205  Communication/ Protocol  protocol is supported     PROFIBUS DP protocol     PROFINET protocol  product function bus communication  protocol is supported AS-Interface protocol  product function     supports PROFlenergy measured values     supports PROFlenergy shutdown address space memory of address range     of the inputs     of the outputs  type of electrical connection of the communication interface  Connections/ Terminals  type of electrical connection     1 for digital input signals     2 for digital input signals     type of electrical connection     for main energy infeed	-40 +70 °C -40 +70 °C 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices) 10 95 % 900 1 060 hPa  Yes Yes Yes No  Yes Yes Plug contact to Base Unit  Plug contact to Base Unit  Plug contact to Base Unit

UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor at 480 V rated value	0.4 A
operating voltage at AC at 60 Hz according to CSA and UL rated value	480 V
Certificates/ approvals	



**General Product Approval** 



Confirmation







**EMC** 

For use in hazardous locations Functional Safety/Safety of Machinery

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping



Type Examination Certificate





Type Test Certificates/Test Report



Marine / Shipping





Confirmation

other



Profibus

#### Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1308-0DA00-0CP0

Cax online generator


 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RK1308-0DA00-0CP0}$ 


 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 


https://support.industry.siemens.com/cs/ww/en/ps/3RK1308-0DA00-0CP0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RK1308-0DA00-0CP0&lang=en

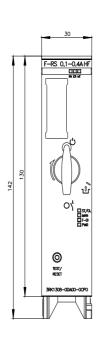

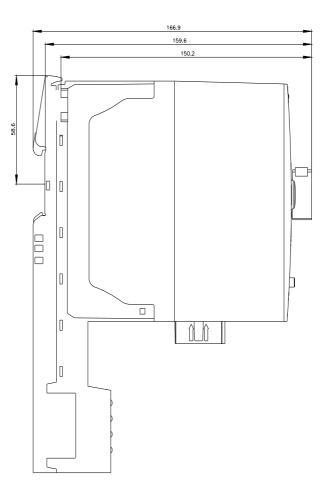

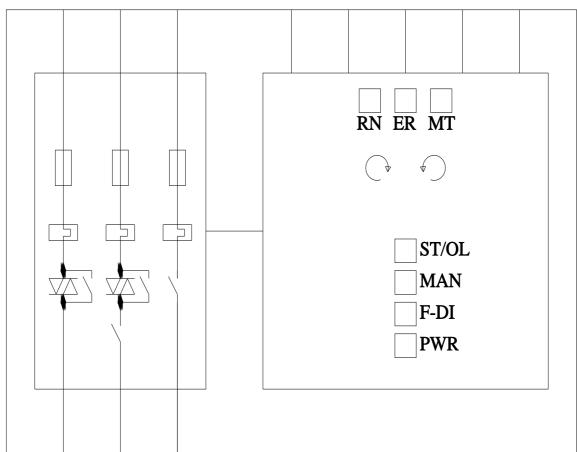

last modified: 10/22/2021 🖸



## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RK13080DA000CP0