3RK1395-6KS41-3AD0

## **Data sheet**



SIRIUS motor starter M200D Technology module Reversing starter Mechanical switching AC-3, 0.75KW / 400 V 0.15 A...2.00 A Electronic overload protection Thermistor: THERMOCLICK / PTC without brake contact 4 DI / 2 DO Han Q4/2 - Han Q8/0 with manual on-site operation and key-operated switch via communication module 3RK1305\* can be used on PROFIBUS or PROFINET

product brand name	SIRIUS
product designation	Motor starters
design of the product	reversing starter
product type designation	M200D
product function	
on-site operation	Yes
<ul> <li>control circuit interface to parallel wiring</li> </ul>	No
insulation voltage rated value	500 V
degree of pollution	3
surge voltage resistance rated value	6 000 V
maximum permissible voltage for protective separation	
<ul> <li>between main and auxiliary circuit</li> </ul>	400 V
<ul> <li>between control and auxiliary circuit</li> </ul>	24 V
shock resistance	12g / 11 ms
vibration resistance	7 mm / 2g
mechanical service life (operating cycles) of the main contacts typical	10 000 000
type of assignment	2
Substance Prohibitance (Date)	07/01/2006
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
Weight	4.1 kg
product function	
direct start	No
reverse starting	Yes
product component motor brake output	No
product feature	
<ul> <li>brake control with 230 V AC</li> </ul>	No
<ul> <li>brake control with 400 V AC</li> </ul>	No
<ul> <li>brake control with 24 V DC</li> </ul>	No
<ul> <li>brake control with 180 V DC</li> </ul>	No
<ul> <li>brake control with 500 V DC</li> </ul>	No
product extension braking module for brake control	No
product function short circuit protection	Yes
design of short-circuit protection	circuit-breakers
maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	50 000 A
• at 500 V rated value	50 000 A
EMC emitted interference according to IEC 60947-1	CISPR11, ambience A (industrial sector)
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3, ambience A (industrial sector)
conducted interference	

<ul> <li>due to burst according to IEC 61000-4-4</li> </ul>	2 kV network connection / 1 kV control connection
<ul> <li>due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV
due to conductor-conductor surge according to IEC     61000 4 5	1 kV
61000-4-5 Safety related data	
proportion of dangerous failures	
	50 %
with low demand rate according to SN 31920      with high demand rate according to SN 31920	50 % 75 %
with high demand rate according to SN 31920  PAGENIA With high demand rate according to SN 34930	
B10 value with high demand rate according to SN 31920	1 000 000
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
IEC 61508	
T1 value for proof test interval or service life according to IEC	20 a
61508	
Electrical Safety	
touch protection against electrical shock	finger-safe
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current- dependent overload release	0.15 2 A
type of the motor protection	full motor protection
operating voltage rated value	200 440 V
operational current	
• at AC at 400 V rated value	2 A
at AC-3 at 400 V rated value	2 A
operating power	
• at AC-3	
— at 400 V rated value	0.75 kW
— at 500 V rated value	750 W
• at AC-3e	
— at 400 V rated value	1 kW
— at 500 V rated value	0.75 kW
product function	
<ul> <li>digital inputs parameterizable</li> </ul>	Yes
digital outputs parameterizable	Yes
number of digital inputs	4
number of sockets	
<ul> <li>for digital output signals</li> </ul>	2
for digital input signals	4
number of digital outputs	2
Supply voltage	
type of voltage of the supply voltage	DC
supply voltage 1 at DC	24 V
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1 at DC rated value	20.4 28.8 V
control supply voltage 1 at DC	20.4 28.8 V
control current at DC	
<ul> <li>in standby mode of operation</li> </ul>	100 mA
during operation	600 mA
power loss [W] in auxiliary and control circuit	
<ul> <li>in switching state OFF with bypass circuit</li> </ul>	1.9584 W
<ul> <li>in switching state ON with bypass circuit</li> </ul>	5.04 W
Response times	
ON-delay time	85 ms
OFF-delay time	65 ms
mounting position	vertical, horizontal, flat
mounting position recommended	horizontal
fastening method	screw fixing
height	215 mm
width	294 mm

2 000 m 25 +55 °C 40 +70 °C 40 +70 °C 10 95 %
-25 +55 °C 40 +70 °C 40 +70 °C 10 95 %
40 +70 °C 40 +70 °C 10 95 %
40 +70 °C 40 +70 °C 10 95 %
40 +70 °C 10 95 %
10 95 % No
No
No
NO NO
No
No
No
Yes
No
No
olug according to ISO 23570, HAN Q4/2
connector
M12 socket
1.6 A
0.7 hp
1 hp
600 V

## General Product Approval







Confirmation





EMV Test Certificates other Dangerous goods Environment Industrial Communication



Type Test Certificates/Test Report

Confirmation

**Transport Information** 

Environmental Confirmations



Profibus

## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1395-6KS41-3AD0

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1395-6KS41-3AD0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RK1395-6KS41-3AD0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RK1395-6KS41-3AD0&lang=en

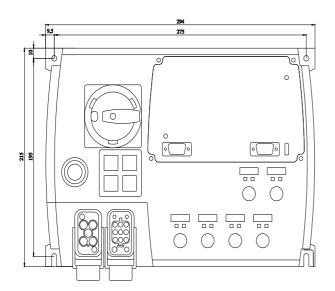

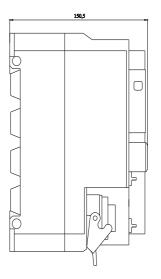

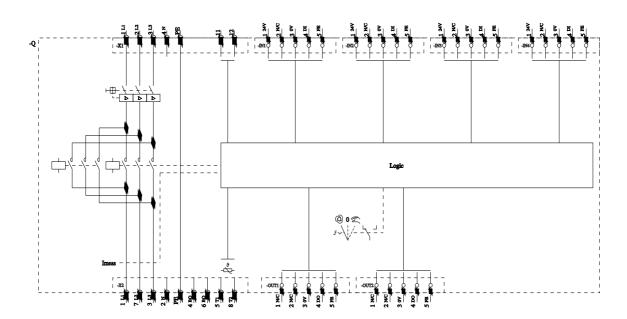

last modified: 3/11/2024 🖸



## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RK13956KS413AD0