



SIRIUS motor starter M200D Technology module Reversing starter Electronic switching AC-3, 5.5 kW / 400 V 1.5 A...12.00 A Electronic overload protection Thermistor: THERMOCLICK / PTC without brake contact 4 DI / 2 DO Han Q4/2 - Han Q8/0 with manual on-site operation and key-operated switch via communication module 3RK1305\* can be used on PROFIBUS or PROFINET

|   |   |
|---|---|
| product brand name                                    | SIRIUS  |
| product designation                                   | Motor starters  |
| design of the product                                 | reversing starter   |
| product type designation                              | M200D   |
| product function                                      |   |
| • on-site operation                                   | Yes   |
| • control circuit interface to parallel wiring        | No  |
| insulation voltage rated value                        | 500 V   |
| degree of pollution                                   | 3   |
| surge voltage resistance rated value                  | 6 000 V   |
| maximum permissible voltage for protective separation |   |
| • between main and auxiliary circuit                  | 400 V   |
| • between control and auxiliary circuit               | 24 V  |
| shock resistance                                      | 12g / 11 ms   |
| vibration resistance                                  | 7 mm / 2g   |
| type of assignment                                    | 1   |
| Substance Prohibitance (Date)                         | 07/01/2006  |
| SVHC substance name                                   | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8<br>2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 |
| Weight  | 4.266 kg  |
| product function                                      |   |
| • direct start  | No  |
| • reverse starting                                    | Yes   |
| product component motor brake output                  | No  |
| product feature                                       |   |
| • brake control with 230 V AC                         | No  |
| • brake control with 400 V AC                         | No  |
| • brake control with 24 V DC                          | No  |
| • brake control with 180 V DC                         | No  |
| • brake control with 500 V DC                         | No  |
| product extension braking module for brake control    | No  |
| product function short circuit protection             | Yes   |
| design of short-circuit protection                    | circuit-breakers  |
| maximum short-circuit current breaking capacity (Icu) |   |
| • at 400 V rated value                                | 50 000 A  |
| • at 500 V rated value                                | 20 000 A  |
| EMC emitted interference according to IEC 60947-1     | CISPR11, ambience A (group 2)   |
| EMC immunity according to IEC 60947-1                 | corresponds to degree of severity 3, ambience A (industrial sector)   |
| conducted interference                                |   |
| • due to burst according to IEC 61000-4-4             | 2 kV network connection / 1 kV control connection   |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• due to conductor-earth surge according to IEC 61000-4-5</li> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>  | 2 kV<br>1 kV                            |
| <b>Safety related data</b>  |   |
| <b>proportion of dangerous failures</b>   |   |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> <li>• with high demand rate according to SN 31920</li> </ul>   | 50 %<br>75 %                            |
| <b>B10 value with high demand rate according to SN 31920</b>  | 1 000 000                               |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>  | 100 FIT                                 |
| <b>IEC 61508</b>  |   |
| T1 value for proof test interval or service life according to IEC 61508   | 20 a                                    |
| <b>Electrical Safety</b>  |   |
| <b>touch protection against electrical shock</b>  | finger-safe                             |
| <b>Main circuit</b>   |   |
| <b>number of poles for main current circuit</b>   | 3                                       |
| <b>design of the switching contact</b>  | solid-state / thyristor / 2 phases      |
| <b>adjustable current response value current of the current-dependent overload release</b>  | 1.5 ... 12 A                            |
| <b>type of the motor protection</b>   | full motor protection                   |
| operating voltage rated value   | 200 ... 440 V                           |
| <b>operational current</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC at 400 V rated value</li> <li>• at AC-3 at 400 V rated value</li> </ul>  | 12 A<br>12 A                            |
| <b>operating power</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> </ul> </li> <li>• at AC-3e <ul style="list-style-type: none"> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> </ul> </li> </ul> | 5.5 kW<br>5 500 W<br><br>6 kW<br>5.5 kW |
| <b>product function</b>   |   |
| <ul style="list-style-type: none"> <li>• digital inputs parameterizable</li> <li>• digital outputs parameterizable</li> </ul>   | Yes<br>Yes                              |
| <b>number of digital inputs</b>   | 4                                       |
| <b>number of sockets</b>  |   |
| <ul style="list-style-type: none"> <li>• for digital output signals</li> <li>• for digital input signals</li> </ul>   | 2<br>4                                  |
| <b>number of digital outputs</b>  | 2                                       |
| <b>Supply voltage</b>   |   |
| <b>type of voltage of the supply voltage</b>  | DC                                      |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>  | DC                                      |
| <b>control supply voltage 1 at DC rated value</b>   | 20.4 ... 28.8 V                         |
| <b>control supply voltage 1 at DC</b>   | 20.4 ... 28.8 V                         |
| <b>control current at DC</b>  |   |
| <ul style="list-style-type: none"> <li>• in standby mode of operation</li> <li>• during operation</li> </ul>  | 100 mA<br>0.6 A                         |
| <b>power loss [W] in auxiliary and control circuit</b>  |   |
| <ul style="list-style-type: none"> <li>• in switching state OFF with bypass circuit</li> <li>• in switching state ON with bypass circuit</li> </ul>   | 2.7936 W<br>9.216 W                     |
| <b>Response times</b>   |   |
| <b>ON-delay time</b>  | 25 ms                                   |
| <b>OFF-delay time</b>   | 35 ms                                   |
| <b>mounting position</b>  | vertical, horizontal, flat              |
| <b>mounting position recommended</b>  | horizontal                              |
| <b>fastening method</b>   | screw fixing                            |
| <b>height</b>   | 215 mm                                  |
| <b>width</b>  | 294 mm                                  |
| <b>depth</b>  | 148 mm                                  |

| Ambient conditions   |                                       |
|--|---------------------------------------|
| installation altitude at height above sea level maximum              | 2 000 m                               |
| <b>ambient temperature</b>   |                                       |
| • during operation   | -25 ... +55 °C                        |
| • during storage   | -40 ... +70 °C                        |
| • during transport   | -40 ... +70 °C                        |
| relative humidity during operation                                   | 10 ... 95 %                           |
| <b>protocol is supported</b>   |                                       |
| • PROFIBUS DP protocol   | No                                    |
| • PROFINET protocol  | No                                    |
| <b>design of the interface</b>                                       |                                       |
| • AS-Interface protocol  | No                                    |
| • PROFINET protocol  | No                                    |
| • PROFIBUS DP protocol   | No                                    |
| <b>product function bus communication</b>                            | Yes                                   |
| protocol is supported AS-Interface protocol                          | No                                    |
| product function control circuit interface with IO link              | No                                    |
| <b>type of electrical connection</b>                                 |                                       |
| • for main current circuit   | plug according to ISO 23570, HAN Q4/2 |
| • for auxiliary and control circuit                                  | connector                             |
| <b>type of electrical connection</b>                                 |                                       |
| • 1 for digital input signals  | M12 socket                            |
| • 1 for digital output signals                                       | M12 socket                            |
| • 2 for digital input signals  | M12 socket                            |
| • 3 for digital input signals  | M12 socket                            |
| • 4 for digital input signals  | M12 socket                            |
| full-load current (FLA) for 3-phase AC motor at 480 V rated value    | 11 A                                  |
| <b>yielded mechanical performance [hp]</b>                           |                                       |
| • for 3-phase AC motor   |                                       |
| — at 220/230 V rated value   | 3 hp                                  |
| — at 460/480 V rated value   | 7.5 hp                                |
| operating voltage at AC at 60 Hz according to CSA and UL rated value | 480 V                                 |

#### Approvals Certificates

##### General Product Approval



[Confirmation](#)



EG-Konf.



UL



| EMV | Test Certificates                                  | other                        | Environment                                 | Industrial Communication |
|-----|--|------------------------------|---|--------------------------|
|     | <a href="#">Type Test Certificates/Test Report</a> | <a href="#">Confirmation</a> | <a href="#">Environmental Conformations</a> |                          |

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1395-6LS71-3AD0>

##### Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1395-6LS71-3AD0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1395-6LS71-3AD0>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1395-6LS71-3AD0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1395-6LS71-3AD0&lang=en)

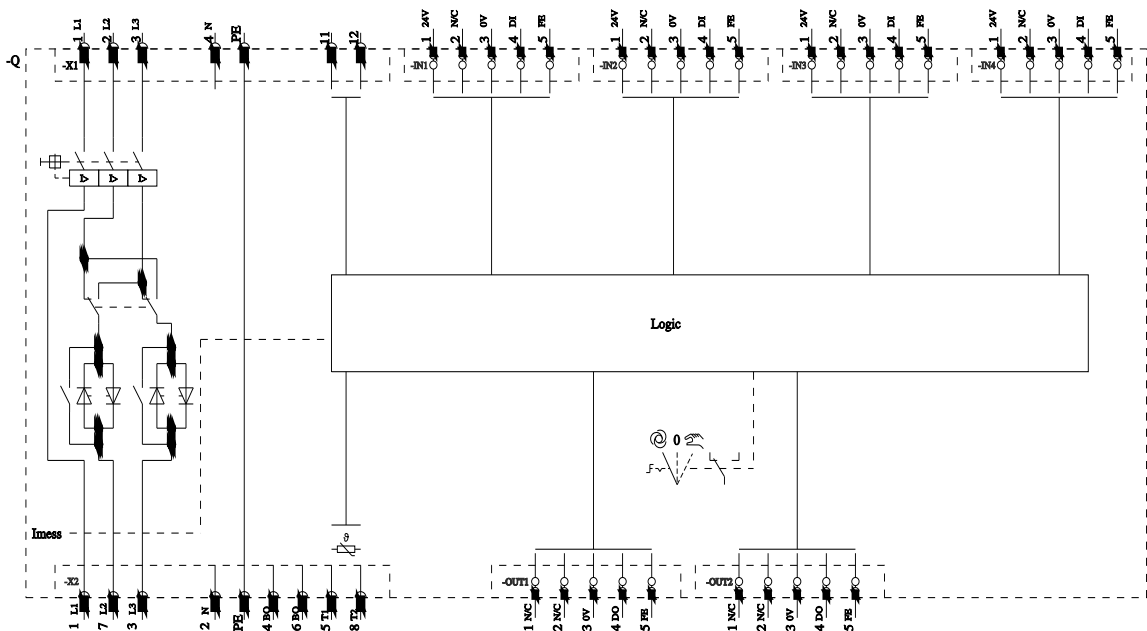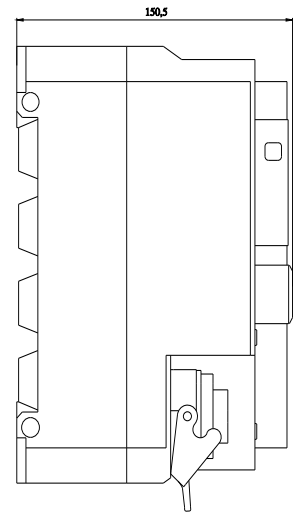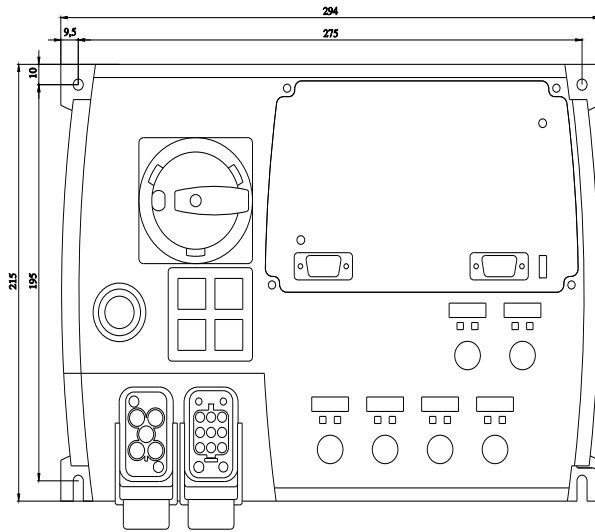



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Siemens:](#)

[3RK13956LS713AD0](#)