SIEMENS

Data sheet 3RN2000-2AA30



Thermistor motor protection relay Compact evaluation unit, 17.5 mm enclosure, spring-type terminals, 1 changeover contact, US = 24 V AC/DC, Auto RESET, suitable for bimetallic switch, supply =output voltage, 1 LED (tripped)

product brand name	SIRIUS
product category	SIRIUS 3RN2 thermistor motor protection
product designation	Thermistor motor protection relay
design of the product	Compact evaluation unit, suitable for bimetallic switch (terminal A1 jumpered with root of changeover contact)
product type designation	3RN2
General technical data	
product function	thermistor motor protection
display version LED	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	0.3 W
at DC in hot operating state	0.3 W
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
degree of pollution	3
surge voltage resistance rated value	4 kV
shock resistance according to IEC 60068-2-27	11g / 15 ms
vibration resistance according to IEC 60068-2-6	10 55 Hz: 0.35 mm
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000
thermal current of the switching element with contacts maximum	5 A
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	05/28/2009
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
Weight	0.124 kg
Product Function	
product function	
• error memory	No
 dynamic open-circuit detection 	No
external reset	No
• auto-RESET	Yes
manual RESET	No
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
• at 50 Hz rated value	24 24 V
at 60 Hz rated value	24 24 V
control supply voltage at DC rated value	24 24 V
operating range factor control supply voltage rated value at	

DC	
• initial value	0.85
full-scale value	1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
initial value	0.85
full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
initial value	0.85
full-scale value	1.1
inrush current peak	
• at 24 V	1.8 A
duration of inrush current peak	
• at 24 V	2 ms
Measuring circuit	
buffering time in the event of power failure minimum	40 ms
Precision	
relative metering precision	9 %
Auxiliary circuit	
material of switching contacts	AgSnO2
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	1
Main circuit	
	E0
operating frequency rated value	50 60 Hz
ampacity of the output relay at AC-15 at 250 V at 50/60 Hz	3 A
ampacity of the output relay at DC-13 • at 24 V	4.0
***	1A
continuous current of the DIAZED fuse link of the output relay	6 A
Electromagnetic compatibility	
Electromagnetic compatibility conducted interference	
conducted interference	2 kV (power ports) / 1 kV (signal ports)
conducted interference • due to burst according to IEC 61000-4-4	2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground)
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5	2 kV (line to ground)
conducted interference • due to burst according to IEC 61000-4-4	
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC	2 kV (line to ground)
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5	2 kV (line to ground) 1 kV (line to line)
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2	2 kV (line to ground) 1 kV (line to line)
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in)
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in)
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections • solid	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in) 0.5 4 mm²
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in) 0.5 4 mm² 0.5 2.5 mm²
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • finely stranded without core end processing	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in) 0.5 4 mm² 0.5 2.5 mm² 0.5 4 mm²
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • finely stranded without core end processing • for AWG cables solid	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in) 0.5 4 mm² 0.5 2.5 mm² 0.5 4 mm² 20 12
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • finely stranded without core end processing • for AWG cables solid • for AWG cables stranded	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in) 0.5 4 mm² 0.5 2.5 mm² 0.5 4 mm²
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • finely stranded without core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in) 0.5 4 mm² 0.5 2.5 mm² 0.5 4 mm² 2 0 12 20 12
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • finely stranded without core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in) 0.5 4 mm² 0.5 2.5 mm² 0.5 4 mm² 20 12 20 12 0.5 4 mm²
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in) 0.5 4 mm² 0.5 2.5 mm² 0.5 4 mm² 20 12 20 12 0.5 4 mm² 0.5 2.5 mm²
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • finely stranded with core end processing • finely stranded with core end processing	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in) 0.5 4 mm² 0.5 2.5 mm² 0.5 4 mm² 20 12 20 12
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • finely stranded without core end processing • finely stranded without core end processing	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in) 0.5 4 mm² 0.5 2.5 mm² 20 12 20 12 0.5 4 mm² 0.5 2.5 mm² 0.5 4 mm²
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the voltage supply and other circuits Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • finely stranded with core end processing • finely stranded with core end processing	2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge without galvanic isolation No No Yes spring-loaded terminal (push-in) spring-loaded terminals (push-in) 0.5 4 mm² 0.5 2.5 mm² 0.5 4 mm² 20 12 20 12 0.5 4 mm² 0.5 2.5 mm²

Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	100 mm
width	17.5 mm
depth	90 mm
required spacing	
 with side-by-side mounting 	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
 for grounded parts 	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— at the side	0 mm
— downwards	0 mm
for live parts	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-40 +85 °C
during transport	-40 +85 °C
relative humidity during operation maximum	70 %
Approvals Certificates	

General Product Approval



Confirmation









Marine / Shipping EMV **Test Certificates** other



Type Test Certificates/Test Report







Confirmation

Environment

Environmental Confirmations

Further information

Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

 $\underline{https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RN2000-2AA30}$

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RN2000-2AA30


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RN2000-2AA30

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RN2000-2AA30&lang=en

Characteristic: Derating

https://support.industry.siemens.com/cs/ww/en/ps/3RN2000-2AA30/manual

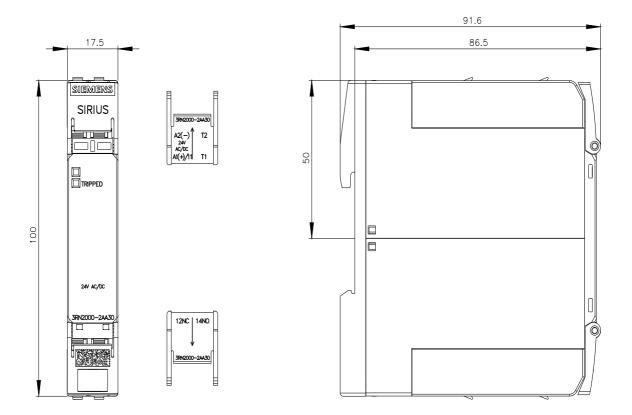

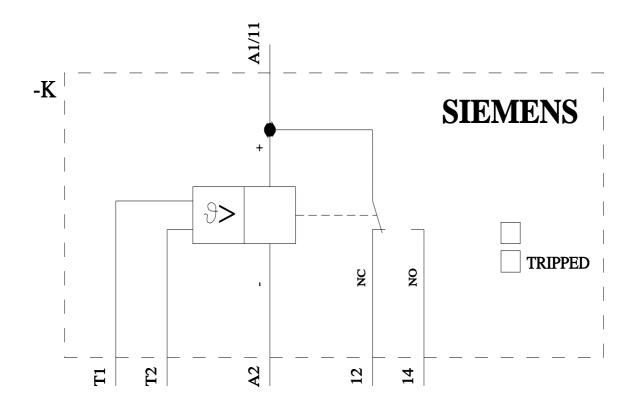

last modified: 12/10/2024 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RN20002AA30