## SIEMENS

## Data sheet

## 3RT2015-1AH02



power contactor, AC-3e/AC-3, 7 A, 3 kW / 400 V, 3-pole, 48 V AC, 50/60 Hz, auxiliary contacts: 1 NC, screw terminal, size: S00

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S00
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	0.6 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	0.2 W
<ul> <li>without load current share typical</li> </ul>	1.1 W
type of calculation of power loss depending on pole	quadratic
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
<ul> <li>of auxiliary circuit rated value</li> </ul>	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	6,7g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	10,5g / 5 ms, 6,6g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of contactor typical</li> </ul>	30 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Weight	0.231 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Environmental footprint	
Environmental Product Declaration(EPD)	Yes
Global Warming Potential [CO2 eq] total	39.6 kg
Global Warming Potential [CO2 eq] during manufacturing	1.18 kg
Global Warming Potential [CO2 eq] during operation	38.5 kg
Global Warming Potential [CO2 eq] after end of life	-0.155 kg
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
• at AC-3 rated value maximum	690 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated value	18 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	18 A
— up to 690 V at ambient temperature 60 °C rated value	16 A
• at AC-3	7.4
— at 400 V rated value	7 A
— at 500 V rated value	6 A
<ul> <li>— at 690 V rated value</li> <li>● at AC-3e</li> </ul>	4.9 A
at AC-se     — at 400 V rated value	7 A
— at 500 V rated value	6 A
— at 690 V rated value	4.9 A
• at AC-4 at 400 V rated value	6.5 A
• at AC-5a up to 690 V rated value	15.8 A
• at AC-5b up to 400 V rated value	5.8 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	4 A
— up to 400 V for current peak value n=20 rated value	4 A
— up to 500 V for current peak value n=20 rated value	3.8 A
— up to 690 V for current peak value n=20 rated value	3.6 A
● at AC-6a	
— up to 230 V for current peak value n=30 rated value	2.7 A
— up to 400 V for current peak value n=30 rated value	2.7 A
<ul> <li>— up to 500 V for current peak value n=30 rated value</li> </ul>	2.5 A
— up to 690 V for current peak value n=30 rated value	2.4 A
minimum cross-section in main circuit at maximum AC-1 rated value	2.5 mm <sup>2</sup>
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	2.6 A
at 690 V rated value	1.8 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	15 A
— at 60 V rated value	15 A
— at 110 V rated value	1.5 A
— at 220 V rated value	0.6 A
— at 440 V rated value	0.42 A
— at 600 V rated value	0.42 A
with 2 current paths in series at DC-1     at 24 // rated value	15.0
- at 24 V rated value	15 A
— at 60 V rated value	15 A
— at 110 V rated value	8.4 A
— at 220 V rated value	1.2 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.5 A

with 2 compart metho in conice of DC 4				
with 3 current paths in series at DC-1				
— at 24 V rated value	15 A			
— at 60 V rated value	15 A			
— at 110 V rated value	15 A			
— at 220 V rated value	15 A			
— at 440 V rated value	0.9 A			
— at 600 V rated value	0.7 A			
• at 1 current path at DC-3 at DC-5				
— at 24 V rated value	15 A			
— at 60 V rated value	0.35 A			
— at 110 V rated value	0.1 A			
• with 2 current paths in series at DC-3 at DC-5				
— at 24 V rated value	15 A			
— at 60 V rated value	3.5 A			
— at 110 V rated value	0.25 A			
• with 3 current paths in series at DC-3 at DC-5				
— at 24 V rated value	15 A			
— at 60 V rated value	15 A			
— at 110 V rated value	15 A			
— at 220 V rated value	1.2 A			
— at 440 V rated value	0.14 A			
— at 600 V rated value	0.14 A			
operating power				
• at AC-3				
— at 230 V rated value	1.5 kW			
— at 400 V rated value	3 kW			
— at 500 V rated value	3 kW			
— at 690 V rated value	4 kW			
• at AC-3e				
— at 230 V rated value	1.5 kW			
— at 400 V rated value	3 kW			
— at 500 V rated value	3 kW			
— at 690 V rated value	4 kW			
operating power for approx. 200000 operating cycles at AC- 4				
• at 400 V rated value	1.15 kW			
• at 690 V rated value	1.15 kW			
operating apparent power at AC-6a				
• up to 230 V for current peak value n=20 rated value	1.5 kVA			
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	2.7 kVA			
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	3.3 kVA			
<ul> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	4.3 kVA			
operating apparent power at AC-6a				
• up to 230 V for current peak value n=30 rated value	1 kVA			
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	1.8 kVA			
<ul> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	2.2 kVA			
<ul> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	2.9 kVA			
short-time withstand current in cold operating state up to 40 $^\circ\mathrm{C}$				
<ul> <li>limited to 1 s switching at zero current maximum</li> </ul>	120 A; Use minimum cross-section acc. to AC-1 rated value			
<ul> <li>limited to 5 s switching at zero current maximum</li> </ul>	86 A; Use minimum cross-section acc. to AC-1 rated value			
<ul> <li>limited to 10 s switching at zero current maximum</li> </ul>	67 A; Use minimum cross-section acc. to AC-1 rated value			
<ul> <li>limited to 30 s switching at zero current maximum</li> </ul>	52 A; Use minimum cross-section acc. to AC-1 rated value			
<ul> <li>limited to 60 s switching at zero current maximum</li> </ul>	43 A; Use minimum cross-section acc. to AC-1 rated value			
no-load switching frequency				
• at AC	10 000 1/h			
operating frequency				
● at AC-1 maximum	1 000 1/h			
● at AC-2 maximum	750 1/h			
• at AC-3 maximum	750 1/h			
<ul> <li>at AC-3e maximum</li> </ul>	750 1/h			

● at AC-4 maximum	250 1/h			
Control circuit/ Control				
type of voltage of the control supply voltage	AC			
control supply voltage at AC				
• at 50 Hz rated value	48 V			
• at 60 Hz rated value	48 V			
operating range factor control supply voltage rated value of				
magnet coil at AC				
• at 50 Hz	0.8 1.1			
• at 60 Hz	0.85 1.1			
apparent pick-up power of magnet coil at AC				
• at 50 Hz	27 VA			
at 60 Hz  inductive never factor with closing never of the coil	24.3 VA			
inductive power factor with closing power of the coil • at 50 Hz	0.8			
• at 50 Hz	0.75			
apparent holding power of magnet coil at AC				
• at 50 Hz	4.2 VA			
• at 60 Hz	3.3 VA			
inductive power factor with the holding power of the coil				
• at 50 Hz	0.25			
• at 60 Hz	0.25			
closing delay				
• at AC	9 35 ms			
opening delay				
• at AC	4 15 ms			
arcing time	10 15 ms			
control version of the switch operating mechanism	Standard A1 - A2			
Auxiliary circuit				
number of NC contacts for auxiliary contacts instantaneous contact	1			
operational current at AC-12 maximum	10 A			
operational current at AC-15				
• at 230 V rated value	10 A			
• at 400 V rated value	3 A			
• at 500 V rated value	2 A			
• at 690 V rated value	1 A			
operational current at DC-12				
at 24 V rated value	10 A			
<ul> <li>at 48 V rated value</li> <li>at 60 V rated value</li> </ul>	6 A			
at 50 V rated value     at 110 V rated value	6 A 3 A			
at 110 V rated value     at 125 V rated value	2 A			
at 220 V rated value	1A			
at 600 V rated value	0.15 A			
operational current at DC-13				
at 24 V rated value	10 A			
• at 48 V rated value	2 A			
• at 60 V rated value	2 A			
• at 110 V rated value	1 A			
• at 125 V rated value	0.9 A			
• at 220 V rated value	0.3 A			
• at 600 V rated value	0.1 A			
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)			
UL/CSA ratings				
full-load current (FLA) for 3-phase AC motor				
• at 480 V rated value	4.8 A			
at 600 V rated value	6.1 A			
yielded mechanical performance [hp]				
for single-phase AC motor	0.25 hz			
— at 110/120 V rated value	0.25 hp			

of 220 V retadivelya	0.75 hr			
<ul> <li>— at 230 V rated value</li> <li>for 3-phase AC motor</li> </ul>	0.75 hp			
- at 200/208 V rated value	1.5 hp			
— at 220/230 V rated value	2 hp			
— at 460/480 V rated value	3 hp			
— at 575/600 V rated value	5 hp			
contact rating of auxiliary contacts according to UL				
Short-circuit protection				
design of the fuse link				
for short-circuit protection of the main circuit				
- with type of coordination 1 required	gG: 35A (690V,100kA), aM: 20A (690V,100kA), BS88: 35A (415V,80kA)			
— with type of assignment 2 required	gG: 20A (690V,100kA), aM: 16A (690V, 100kA), BS88: 20A (415V, 80kA)			
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 10 A (500 V, 1 kA)			
Installation/ mounting/ dimensions				
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and			
	backward by +/- 22.5° on vertical mounting surface			
fastening method side-by-side mounting	Yes			
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715			
height	58 mm			
width	45 mm			
depth	73 mm			
required spacing				
with side-by-side mounting	40			
— forwards	10 mm			
— upwards	10 mm			
— downwards	10 mm			
— at the side	0 mm			
<ul> <li>for grounded parts</li> </ul>	10 mm			
— forwards — upwards	10 mm			
— at the side	6 mm			
— downwards	10 mm			
for live parts				
— forwards	10 mm			
— upwards	10 mm			
— downwards	10 mm			
— at the side	6 mm			
Connections/ Terminals				
type of electrical connection				
for main current circuit	screw-type terminals			
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals			
<ul> <li>at contactor for auxiliary contacts</li> </ul>	Screw-type terminals			
• of magnet coil	Screw-type terminals			
type of connectable conductor cross-sections				
for main contacts				
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²			
— solid or stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²			
- finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)			
<ul> <li>for AWG cables for main contacts</li> </ul>	2x (20 16), 2x (18 14), 2x 12			
connectable conductor cross-section for main contacts				
• solid	0.5 4 mm²			
● stranded	0.5 4 mm²			
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm²			
connectable conductor cross-section for auxiliary contacts				
solid or stranded	0.5 4 mm <sup>2</sup>			
finely stranded with core end processing	0.5 2.5 mm²			
type of connectable conductor cross-sections				
for auxiliary contacts				
— solid or stranded	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>			
— finely stranded with core end processing	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )			
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14), 2x 12			

AWG number as coded connectable conducto section	r cross				
for main contacts	20	0 12			
		0 12 0 12			
for auxiliary contacts	20	J 12			
Safety related data	_		_	_	
product function					
mirror contact according to IEC 60947-4-1		es			
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>		0			
suitable for safety function		es			
suitability for use safety-related switching OFF		es			
service life maximum		Оа			
test wear-related service life necessary	Y	es			
proportion of dangerous failures					
<ul> <li>with low demand rate according to SN 3192</li> </ul>		40 %			
with high demand rate according to SN 319		3 %			
B10 value with high demand rate according to	SN 31920 1	000 000			
failure rate [FIT] with low demand rate accordi 31920	ng to SN 10	00 FIT			
ISO 13849					
device type according to ISO 13849-1	3				
overdimensioning according to ISO 13849-2 no	ecessary Y	es			
IEC 61508					
safety device type according to IEC 61508-2	Ty	уре А			
Electrical Safety					
protection class IP on the front according to IB	EC 60529 IP	20			
touch protection on the front according to IEC	60529 fir	nger-safe, for vertical contact	from the front		
pprovals Certificates					
General Product Ap-					
proval EMV	Test Certificates		Marine / Shipping		
	Type Test Certific- ates/Test Report	<u>Special Test Certific-</u> <u>ate</u>	ABS	B U REAU VERITAS	
Marine / Shipping				other	
Llovds Register				<u>Miscellaneous</u>	
DNV LRS	PRS	RINA	RMRS		
DNV LRS other	PRS Railway	Environment	RMRS		
	PRS Railway Special Test Certific ate		RMRS Environmental Con- firmations		
other	Special Test Certific				

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2015-1AH02 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2015-1AH02


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1AH02


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2015-1AH02&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1AH02/char


Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2015-1AH02&objecttype=14&gridview=view1







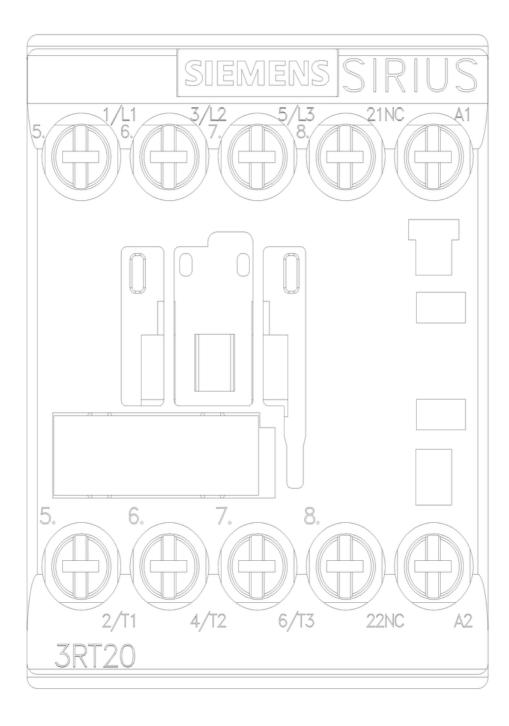

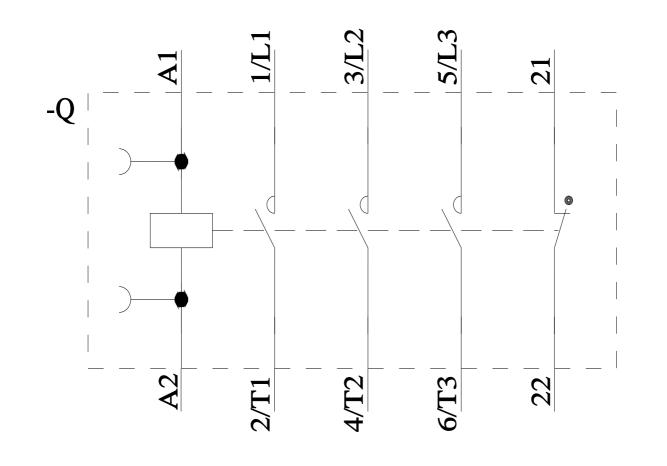

last modified:

7/19/2024 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20151AH02