3RT2018-1TP01-0RA0

Data sheet



power contactor, AC-3e/AC-3, 16 A, 7.5 kW / 400 V, 3-pole, 230 V AC, 50/60 Hz, with integrated varistor, auxiliary contacts: 1 NO, screw terminal, size: S00, ambient temperature: -30 to +70 °C, thermal rating: max 0.857, operating range coil: 0.95 ... 1.03 Us, Us = 230 V, maximum temperature 70 °C, frequency of operation 0.857 Z,

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S00
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	3 W
 at AC in hot operating state per pole 	1 W
without load current share typical	1.5 W
type of calculation of power loss depending on pole	quadratic
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	7,3g / 5 ms, 4,7g / 10 ms
shock resistance with sine pulse	
• at AC	11,4g / 5 ms, 7,3g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	3 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	3 000 000
 of the contactor with added auxiliary switch block typical 	3 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Weight	0.232 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +70 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

lain circuit	0
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
 at AC-3 rated value maximum 	690 V
at AC-3e rated value maximum	690 V
operational current	
 at AC-1 at 400 V at ambient temperature 40 °C rated value 	22 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated	22 A
value	227
— up to 690 V at ambient temperature 60 °C rated	20 A
value	
• at AC-3	
— at 400 V rated value	16 A
— at 500 V rated value	12.4 A
— at 690 V rated value	8.9 A
• at AC-3e	
— at 400 V rated value	16 A
— at 500 V rated value	12.4 A
— at 690 V rated value	8.9 A
• at AC-4 at 400 V rated value	11.5 A
• at AC-5a up to 690 V rated value	19.4 A
• at AC-5b up to 400 V rated value	13.2 A
• at AC-6a	
 up to 230 V for current peak value n=20 rated value 	9.6 A
 up to 400 V for current peak value n=20 rated value 	9.6 A
 up to 500 V for current peak value n=20 rated value 	9.6 A
 up to 690 V for current peak value n=20 rated value 	8.9 A
• at AC-6a	
 up to 230 V for current peak value n=30 rated value 	6.6 A
 up to 400 V for current peak value n=30 rated value 	6.4 A
 up to 500 V for current peak value n=30 rated value 	6.4 A
— up to 690 V for current peak value n=30 rated value	6.4 A
minimum cross-section in main circuit at maximum AC-1 rated value	4 mm²
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	5.5 A
at 690 V rated value	4.4 A
operational current	4.4 A
at 1 current path at DC-1	
— at 24 V rated value	20 A
— at 60 V rated value	20 A
— at 110 V rated value	2.1 A
— at 110 V rated value — at 220 V rated value	0.8 A
— at 220 V rated value — at 440 V rated value	0.6 A
	0.6 A
— at 600 V rated valuewith 2 current paths in series at DC-1	0.0 A
— at 24 V rated value	20 A
— at 60 V rated value	20 A
— at 60 V rated value — at 110 V rated value	12 A
— at 110 v rated value — at 220 V rated value	1.6 A
— at 220 V rated value — at 440 V rated value	0.8 A
— at 440 V rated value — at 600 V rated value	0.6 A 0.7 A
	U.I A
with 3 current paths in series at DC-1 at 24 V roted value.	20.4
— at 24 V rated value	20 A
— at 60 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	20 A
— at 440 V rated value	1.3 A

— at 600 V rated value	1 A
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	20 A
— at 60 V rated value	0.5 A
— at 110 V rated value	0.15 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 60 V rated value	5 A
— at 110 V rated value	0.35 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 60 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	1.5 A
— at 440 V rated value	0.2 A
— at 600 V rated value	0.2 A
operating power	
• at AC-2 at 400 V rated value	7.5 kW
• at AC-3	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	7.5 kW
• at AC-3e	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	7.5 kW
operating power for approx. 200000 operating cycles at AC-	
4	
• at 400 V rated value	2.5 kW
at 690 V rated value	3.5 kW
operating apparent power at AC-6a	
 up to 230 V for current peak value n=20 rated value 	3.8 kVA
 up to 400 V for current peak value n=20 rated value 	6.6 kVA
 up to 500 V for current peak value n=20 rated value 	8.3 kVA
• up to 690 V for current peak value n=20 rated value	10.6 kVA
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	2.5 kVA
• up to 400 V for current peak value n=30 rated value	4.4 kVA
 up to 500 V for current peak value n=30 rated value 	5.5 kVA
 up to 690 V for current peak value n=30 rated value 	7.6 kVA
short-time withstand current in cold operating state up to	
40 °C	
 limited to 1 s switching at zero current maximum 	300 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 5 s switching at zero current maximum 	169 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 10 s switching at zero current maximum 	128 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 30 s switching at zero current maximum 	92 A; Use minimum cross-section acc. to AC-1 rated value
• limited to 60 s switching at zero current maximum	74 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	10 000 1/h
operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
• at AC-3e maximum	750 1/h
• at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	218 237 V

a at 60 Hz rated value	210 227 \
at 60 Hz rated value portating range factor central supply voltage rated value of	218 237 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.95 1.03
• at 60 Hz	0.95 1.03
design of the surge suppressor	with varistor
apparent pick-up power of magnet coil at AC	With Valision
	37 VA
• at 50 Hz	
• at 60 Hz	33 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.8
• at 60 Hz	0.75
apparent holding power of magnet coil at AC	
• at 50 Hz	5.7 VA
• at 60 Hz	4.4 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.25
● at 60 Hz	0.25
closing delay	
• at AC	9 35 ms
opening delay	
• at AC	4 15 ms
arcing time	10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	10 A
at 400 V rated value	3 A
at 500 V rated value	2 A
at 690 V rated value	1 A
operational current at DC-12	
at 24 V rated value	10 A
at 48 V rated value	6 A
at 60 V rated value	6 A
at 110 V rated value	3 A
at 125 V rated value	2 A
at 220 V rated value	1A
at 600 V rated value	0.15 A
operational current at DC-13	0.1071
operational current at DC-13	
at 24 V rated value	10.0
at 24 V rated value at 48 V rated value	10 A
• at 48 V rated value	2 A
at 48 V rated valueat 60 V rated value	2 A 2 A
at 48 V rated valueat 60 V rated valueat 110 V rated value	2 A 2 A 1 A
 at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value 	2 A 2 A 1 A 0.9 A
 at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value 	2 A 2 A 1 A 0.9 A 0.3 A
 at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value 	2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
 at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts	2 A 2 A 1 A 0.9 A 0.3 A
at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings	2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
 at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts	2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings	2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor	2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value	2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value	2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp]	2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value for single-phase AC motor for single-phase AC motor	2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value for single-phase AC motor at 110/120 V rated value	2 A 2 A 1 A 0.9 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 14 A 11 A
at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value for single-phase AC motor at 110/120 V rated value at 230 V rated value at 230 V rated value	2 A 2 A 1 A 0.9 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 14 A 11 A
at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value for single-phase AC motor at 110/120 V rated value at 230 V rated value for 3-phase AC motor	2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 14 A 11 A 1 hp 2 hp

— at 460/480 V rated value	10 hp
— at 575/600 V rated value	10 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V	C characteristic: 10 A; 0.4 kA
design of the fuse link	
• for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method side-by-side mounting	Yes
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	58 mm
width	45 mm
depth	73 mm
required spacing	
 with side-by-side mounting 	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
 for grounded parts 	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
 for live parts 	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
 for main current circuit 	screw-type terminals
 for auxiliary and control circuit 	screw-type terminals
 at contactor for auxiliary contacts 	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections	
 for main contacts 	
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
— solid or stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
for AWG cables for main contacts	2x (20 16), 2x (18 14), 2x 12
connectable conductor cross-section for main contacts	
• solid	0.5 4 mm²
• stranded	0.5 4 mm²
finely stranded with core end processing	0.5 2.5 mm²
connectable conductor cross-section for auxiliary contacts	
 solid or stranded 	0.5 4 mm²
finely stranded with core end processing	0.5 2.5 mm²
type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 for AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14), 2x 12
AWG number as coded connectable conductor cross section	
• for main contacts	20 12
for auxiliary contacts	20 12
Safety related data	

product function	
 mirror contact according to IEC 60947-4-1 	Yes; with 3RH29
 positively driven operation according to IEC 60947-5-1 	No
suitable for safety function	Yes
suitability for use safety-related switching OFF	Yes
service life maximum	20 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %
B10 value with high demand rate according to SN 31920	1 000 000
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Further information	

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2018-1TP01-0RA0

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RT2018-1TP01-0RA0}$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2018-1TP01-0RA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2018-1TP01-0RA0&lang=en


Characteristic: Tripping characteristics, I^2t , Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2018-1TP01-0RA0/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2018-1TP01-0RA0&objecttype=14&gridview=view1







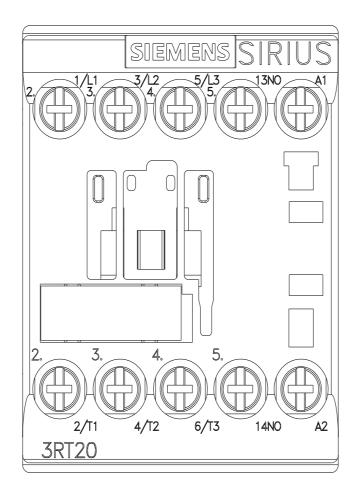

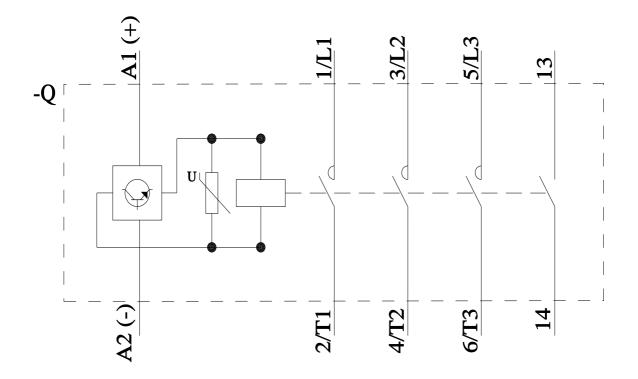

last modified: 4/17/2025 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20181TP010RA0