# **SIEMENS**

Data sheet 3RT2024-2BB44



power contactor, AC-3e/AC-3, 12 A, 5.5 kW / 400 V, 3-pole, 24 V DC, auxiliary contacts: 2 NO + 2 NC, spring-loaded terminal, size: S0, removable auxiliary switch

| product brand name   | SIRIUS                   |
|--|--------------------------|
| product designation  | Power contactor          |
| product type designation   | 3RT2                     |
| General technical data   |                          |
| size of contactor  | S0                       |
| product extension  |                          |
| <ul> <li>function module for communication</li> </ul>  | No                       |
| <ul><li>auxiliary switch</li></ul>   | No                       |
| power loss [W] for rated value of the current  |                          |
| <ul> <li>at AC in hot operating state</li> </ul>   | 0.9 W                    |
| <ul> <li>at AC in hot operating state per pole</li> </ul>  | 0.3 W                    |
| without load current share typical   | 5.9 W                    |
| insulation voltage   |                          |
| <ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>                                   | 690 V                    |
| of auxiliary circuit with degree of pollution 3 rated value  | 690 V                    |
| surge voltage resistance   |                          |
| of main circuit rated value  | 6 kV                     |
| of auxiliary circuit rated value   | 6 kV                     |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 400 V                    |
| shock resistance at rectangular impulse  |                          |
| • at DC  | 10g / 5 ms, 7,5g / 10 ms |
| shock resistance with sine pulse   |                          |
| • at DC  | 15g / 5 ms, 10g / 10 ms  |
| mechanical service life (operating cycles)   |                          |
| of contactor typical   | 10 000 000               |
| <ul> <li>of the contactor with added electronically optimized<br/>auxiliary switch block typical</li> </ul>  | 5 000 000                |
| <ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>                               | 10 000 000               |
| reference code according to IEC 81346-2  | Q                        |
| Substance Prohibitance (Date)  | 10/01/2009               |
| Ambient conditions   |                          |
| installation altitude at height above sea level maximum  | 2 000 m                  |
| ambient temperature  |                          |
| <ul> <li>during operation</li> </ul>   | -25 +60 °C               |
| during storage   | -55 +80 °C               |
| relative humidity minimum  | 10 %                     |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum   | 95 %                     |
| Main circuit   |                          |
| number of poles for main current circuit   | 3                        |

| number of NO contacts for main contacts                                  | 3      |
|--|--------|
| operating voltage  |        |
| <ul> <li>at AC-3 rated value maximum</li> </ul>                          | 690 V  |
| at AC-3e rated value maximum   | 690 V  |
| operational current  |        |
| <ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated</li> </ul>  | 40 A   |
| value  |        |
| • at AC-1  |        |
| <ul> <li>up to 690 V at ambient temperature 40 °C rated value</li> </ul> | 40 A   |
| — up to 690 V at ambient temperature 60 °C rated                         | 35 A   |
| value  |        |
| • at AC-3  |        |
| — at 400 V rated value   | 12 A   |
| — at 500 V rated value   | 12 A   |
| — at 690 V rated value   | 9 A    |
| • at AC-3e   |        |
| — at 400 V rated value   | 12 A   |
| — at 500 V rated value   | 12 A   |
| — at 690 V rated value   | 9 A    |
| • at AC-4 at 400 V rated value   | 12.5 A |
| • at AC-5a up to 690 V rated value                                       | 35.2 A |
| • at AC-5b up to 400 V rated value                                       | 9.9 A  |
| • at AC-6a   |        |
| — up to 230 V for current peak value n=20 rated value                    | 11.4 A |
| — up to 400 V for current peak value n=20 rated value                    | 11.4 A |
| — up to 500 V for current peak value n=20 rated value                    | 11.3 A |
| — up to 690 V for current peak value n=20 rated value                    | 9 A    |
| • at AC-6a   |        |
| — up to 230 V for current peak value n=30 rated value                    | 7.6 A  |
| — up to 400 V for current peak value n=30 rated value                    | 7.6 A  |
| — up to 500 V for current peak value n=30 rated value                    | 7.6 A  |
| — up to 690 V for current peak value n=30 rated value                    | 7.6 A  |
| minimum cross-section in main circuit at maximum AC-1 rated value        | 10 mm² |
| operational current for approx. 200000 operating cycles at               |        |
| AC-4   | 554    |
| • at 400 V rated value   | 5.5 A  |
| at 690 V rated value   | 5.5 A  |
| operational current  |        |
| • at 1 current path at DC-1  |        |
| — at 24 V rated value  | 35 A   |
| — at 60 V rated value  | 20 A   |
| — at 110 V rated value   | 4.5 A  |
| — at 220 V rated value   | 1 A    |
| — at 440 V rated value   | 0.4 A  |
| — at 600 V rated value   | 0.25 A |
| with 2 current paths in series at DC-1                                   |        |
| — at 24 V rated value  | 35 A   |
| — at 60 V rated value  | 35 A   |
| — at 110 V rated value   | 35 A   |
| — at 220 V rated value   | 5 A    |
| — at 440 V rated value   | 1 A    |
| — at 600 V rated value   | 0.8 A  |
| with 3 current paths in series at DC-1                                   |        |
| — at 24 V rated value  | 35 A   |
| — at 60 V rated value  | 35 A   |
| — at 110 V rated value   | 35 A   |
| — at 220 V rated value   | 35 A   |
| — at 440 V rated value   | 2.9 A  |
| — at 600 V rated value   | 1.4 A  |
| <ul> <li>at 1 current path at DC-3 at DC-5</li> </ul>                    |        |

| -t 04 Vtdl  | 00 A   |
|---|--|
| — at 24 V rated value   | 20 A   |
| — at 60 V rated value   | 5 A  |
| — at 110 V rated value  | 2.5 A  |
| — at 220 V rated value  | 1 A  |
| — at 440 V rated value  | 0.09 A   |
| — at 600 V rated value  | 0.06 A   |
| <ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>  |  |
| — at 24 V rated value   | 35 A   |
| — at 60 V rated value   | 35 A   |
| — at 110 V rated value  | 15 A   |
| — at 220 V rated value  | 3 A  |
| — at 440 V rated value  | 0.27 A   |
| — at 600 V rated value  | 0.16 A   |
| <ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>  |  |
| — at 24 V rated value   | 35 A   |
| — at 60 V rated value   | 35 A   |
| — at 110 V rated value  | 35 A   |
| — at 220 V rated value  | 10 A   |
| — at 440 V rated value  | 0.6 A  |
| — at 600 V rated value  | 0.6 A  |
| operating power   |  |
| • at AC-3   |  |
| — at 230 V rated value  | 3 kW   |
| — at 400 V rated value  | 5.5 kW   |
| — at 500 V rated value  | 5.5 kW   |
| — at 690 V rated value  | 7.5 kW   |
| • at AC-3e  |  |
| — at 230 V rated value  | 3 kW   |
| — at 400 V rated value  | 5.5 kW   |
| — at 500 V rated value  | 5.5 kW   |
| — at 690 V rated value  | 7.5 kW   |
| operating power for approx. 200000 operating cycles at AC-  |  |
| at 400 V rated value  | 2.6 kW   |
| • at 400 v rated value  | 2.0 KW   |
| • at 690 V rated value  | 4.6 kW   |
| • at 690 V rated value  | 4.6 kW   |
| operating apparent power at AC-6a   |  |
| operating apparent power at AC-6a  ● up to 230 V for current peak value n=20 rated value  | 4.5 kVA  |
| <ul> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=20 rated value</li> <li>up to 400 V for current peak value n=20 rated value</li> </ul>   | 4.5 kVA<br>7.8 kVA   |
| <ul> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=20 rated value</li> <li>up to 400 V for current peak value n=20 rated value</li> <li>up to 500 V for current peak value n=20 rated value</li> </ul>  | 4.5 kVA<br>7.8 kVA<br>9.8 kVA  |
| operating apparent power at AC-6a  up to 230 V for current peak value n=20 rated value  up to 400 V for current peak value n=20 rated value  up to 500 V for current peak value n=20 rated value  up to 690 V for current peak value n=20 rated value   | 4.5 kVA<br>7.8 kVA   |
| operating apparent power at AC-6a  oup to 230 V for current peak value n=20 rated value  oup to 400 V for current peak value n=20 rated value  oup to 500 V for current peak value n=20 rated value  oup to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a  | 4.5 kVA<br>7.8 kVA<br>9.8 kVA<br>10.7 kVA  |
| operating apparent power at AC-6a  oup to 230 V for current peak value n=20 rated value oup to 400 V for current peak value n=20 rated value oup to 500 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value operating apparent power at AC-6a oup to 230 V for current peak value n=30 rated value   | 4.5 kVA<br>7.8 kVA<br>9.8 kVA<br>10.7 kVA  |
| operating apparent power at AC-6a  oup to 230 V for current peak value n=20 rated value oup to 400 V for current peak value n=20 rated value oup to 500 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value operating apparent power at AC-6a oup to 230 V for current peak value n=30 rated value oup to 400 V for current peak value n=30 rated value  | 4.5 kVA<br>7.8 kVA<br>9.8 kVA<br>10.7 kVA<br>3 kVA<br>5.2 kVA  |
| operating apparent power at AC-6a  oup to 230 V for current peak value n=20 rated value oup to 400 V for current peak value n=20 rated value oup to 500 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value operating apparent power at AC-6a oup to 230 V for current peak value n=30 rated value oup to 400 V for current peak value n=30 rated value oup to 500 V for current peak value n=30 rated value   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA  |
| operating apparent power at AC-6a  oup to 230 V for current peak value n=20 rated value  oup to 400 V for current peak value n=20 rated value  oup to 500 V for current peak value n=20 rated value  oup to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a  oup to 230 V for current peak value n=30 rated value  oup to 400 V for current peak value n=30 rated value  oup to 500 V for current peak value n=30 rated value  oup to 690 V for current peak value n=30 rated value  | 4.5 kVA<br>7.8 kVA<br>9.8 kVA<br>10.7 kVA<br>3 kVA<br>5.2 kVA  |
| operating apparent power at AC-6a  oup to 230 V for current peak value n=20 rated value oup to 400 V for current peak value n=20 rated value oup to 500 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value operating apparent power at AC-6a oup to 230 V for current peak value n=30 rated value oup to 400 V for current peak value n=30 rated value oup to 500 V for current peak value n=30 rated value   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA  |
| operating apparent power at AC-6a  oup to 230 V for current peak value n=20 rated value oup to 400 V for current peak value n=20 rated value oup to 500 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value operating apparent power at AC-6a oup to 230 V for current peak value n=30 rated value oup to 400 V for current peak value n=30 rated value oup to 500 V for current peak value n=30 rated value oup to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA  |
| operating apparent power at AC-6a  oup to 230 V for current peak value n=20 rated value oup to 400 V for current peak value n=20 rated value oup to 500 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value operating apparent power at AC-6a oup to 230 V for current peak value n=30 rated value oup to 400 V for current peak value n=30 rated value oup to 500 V for current peak value n=30 rated value oup to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA  |
| operating apparent power at AC-6a  oup to 230 V for current peak value n=20 rated value oup to 400 V for current peak value n=20 rated value oup to 500 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value operating apparent power at AC-6a oup to 230 V for current peak value n=30 rated value oup to 400 V for current peak value n=30 rated value oup to 500 V for current peak value n=30 rated value oup to 690 V for current peak value n=30 rated value oup to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C old imited to 1 s switching at zero current maximum  | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  |
| operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value  • up to 400 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  • up to 690 V for current peak value n=30 rated value  operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  210 A; Use minimum cross-section acc. to AC-1 rated value 210 A; Use minimum cross-section acc. to AC-1 rated value   |
| operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  210 A; Use minimum cross-section acc. to AC-1 rated value 210 A; Use minimum cross-section acc. to AC-1 rated value   |
| operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value  • up to 400 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  • up to 690 V for current peak value n=30 rated value  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  210 A; Use minimum cross-section acc. to AC-1 rated value 210 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value   |
| operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value  • up to 400 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  210 A; Use minimum cross-section acc. to AC-1 rated value 210 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value   |
| operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value  • up to 400 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  • up to 690 V for current peak value n=30 rated value  operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  210 A; Use minimum cross-section acc. to AC-1 rated value 210 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 126 A; Use minimum cross-section acc. to AC-1 rated value 105 A; Use minimum cross-section acc. to AC-1 rated value   |
| operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum no-load switching frequency • at DC operating frequency  | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  210 A; Use minimum cross-section acc. to AC-1 rated value 210 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 126 A; Use minimum cross-section acc. to AC-1 rated value 105 A; Use minimum cross-section acc. to AC-1 rated value   |
| operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum no-load switching frequency • at DC  operating frequency • at AC-1 maximum   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  210 A; Use minimum cross-section acc. to AC-1 rated value 210 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 126 A; Use minimum cross-section acc. to AC-1 rated value 105 A; Use minimum cross-section acc. to AC-1 rated value 1 500 1/h   |
| operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value  • up to 400 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to  40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  no-load switching frequency  • at DC  operating frequency  • at AC-1 maximum  • at AC-2 maximum   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  210 A; Use minimum cross-section acc. to AC-1 rated value 210 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 126 A; Use minimum cross-section acc. to AC-1 rated value 105 A; Use minimum cross-section acc. to AC-1 rated value 105 A; Use minimum cross-section acc. to AC-1 rated value 1 500 1/h 1 000 1/h 1 000 1/h                     |
| operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value  • up to 400 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  • up to 690 V for current peak value n=30 rated value  operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  210 A; Use minimum cross-section acc. to AC-1 rated value 210 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 126 A; Use minimum cross-section acc. to AC-1 rated value 105 A; Use minimum cross-section acc. to AC-1 rated value 1 500 1/h 1 000 1/h 1 000 1/h 1 000 1/h           |
| operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum  no-load switching frequency • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-3 maximum • at AC-3 maximum | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  210 A; Use minimum cross-section acc. to AC-1 rated value 210 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 126 A; Use minimum cross-section acc. to AC-1 rated value 105 A; Use minimum cross-section acc. to AC-1 rated value 1 500 1/h 1 000 1/h 1 000 1/h 1 000 1/h 1 000 1/h |
| operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value  • up to 400 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  • up to 690 V for current peak value n=30 rated value  operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum   | 4.5 kVA 7.8 kVA 9.8 kVA 10.7 kVA  3 kVA 5.2 kVA 6.5 kVA 9 kVA  210 A; Use minimum cross-section acc. to AC-1 rated value 210 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 170 A; Use minimum cross-section acc. to AC-1 rated value 126 A; Use minimum cross-section acc. to AC-1 rated value 105 A; Use minimum cross-section acc. to AC-1 rated value 1 500 1/h 1 000 1/h 1 000 1/h 1 000 1/h           |

| type of voltage of the control supply voltage   | DC   |
|---|--|
| control supply voltage at DC  | 241/   |
| rated value     operating range factor control supply voltage rated value of magnet coil at DC        | 24 V   |
| • initial value   | 0.8  |
| • full-scale value  | 1.1  |
| closing power of magnet coil at DC  | 5.9 W  |
| holding power of magnet coil at DC  | 5.9 W  |
| closing delay   |  |
| • at DC   | 50 170 ms  |
| opening delay   |  |
| • at DC   | 15 18 ms   |
| arcing time   | 10 10 ms   |
| control version of the switch operating mechanism   | Standard A1 - A2   |
| Auxiliary circuit   |  |
| number of NC contacts for auxiliary contacts instantaneous contact                                    | 2  |
| number of NO contacts for auxiliary contacts instantaneous contact                                    | 2  |
| operational current at AC-12 maximum  | 10 A   |
| operational current at AC-15  |  |
| at 230 V rated value  | 6 A  |
| at 400 V rated value  | 3 A  |
| at 500 V rated value  | 2 A  |
| at 690 V rated value  | 1 A  |
| operational current at DC-12  | 40.4   |
| • at 24 V rated value   | 10 A   |
| <ul><li>at 48 V rated value</li><li>at 60 V rated value</li></ul>                                     | 6 A<br>6 A   |
| at 100 V rated value     at 110 V rated value   | 3 A  |
| at 175 V rated value     at 125 V rated value   | 2 A  |
| at 220 V rated value  | 1A   |
| at 600 V rated value  | 0.15 A   |
| operational current at DC-13  |  |
| at 24 V rated value   | 6 A  |
| at 48 V rated value   | 2 A  |
| • at 60 V rated value   | 2 A  |
| at 110 V rated value  | 1 A  |
| at 125 V rated value  | 0.9 A  |
| at 220 V rated value  | 0.3 A  |
| at 600 V rated value  | 0.1 A  |
| contact reliability of auxiliary contacts   | 1 faulty switching per 100 million (17 V, 1 mA)                              |
| UL/CSA ratings  |  |
| full-load current (FLA) for 3-phase AC motor  |  |
| • at 480 V rated value  | 11 A   |
| at 600 V rated value  | 11 A   |
| yielded mechanical performance [hp]   |  |
| • for single-phase AC motor   |  |
| — at 110/120 V rated value  | 1 hp   |
| — at 230 V rated value  | 2 hp   |
| • for 3-phase AC motor  |  |
| — at 200/208 V rated value  | 3 hp   |
| — at 220/230 V rated value  | 3 hp   |
| — at 460/480 V rated value  | 7.5 hp   |
| — at 575/600 V rated value  | 10 hp  |
| contact rating of auxiliary contacts according to UL  | A600 / Q600  |
| Short-circuit protection  |  |
| <ul> <li>design of the fuse link</li> <li>for short-circuit protection of the main circuit</li> </ul> |  |
| with type of coordination 1 required  | gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA)            |
| mar type or opportunitation is required   | 30. 00. (000 1, 10010 1), aim. 021 (000 1, 10010 1), 5000. 001 (410 1,00101) |

| — with type of assignment 2 required  | gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA)                 |
|---|---|
| for short-circuit protection of the auxiliary switch required   | gG: 10 A (500 V, 1 kA)  |
| Installation/ mounting/ dimensions  | go. 1077 (000 V, 110 V)   |
| mounting position   | +/-180° rotation possible on vertical mounting surface; can be tilted forward and |
|   | backward by +/- 22.5° on vertical mounting surface                                |
| fastening method  | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715          |
| side-by-side mounting   | Yes   |
| height  | 102 mm  |
| width   | 45 mm   |
| depth   | 154 mm  |
| required spacing  |   |
| with side-by-side mounting  | 40  |
| — forwards  | 10 mm   |
| — upwards   | 10 mm   |
| — downwards   | 10 mm   |
| — at the side   | 0 mm  |
| for grounded parts  |   |
| — forwards  | 10 mm   |
| — upwards   | 10 mm   |
| — at the side   | 6 mm  |
| — downwards   | 10 mm   |
| • for live parts  | 40  |
| — forwards  | 10 mm   |
| — upwards   | 10 mm   |
| — downwards   | 10 mm   |
| — at the side   | 6 mm  |
| Connections/ Terminals  |   |
| type of electrical connection   |   |
| for main current circuit  | spring-loaded terminals   |
| for auxiliary and control circuit   | spring-loaded terminals   |
| at contactor for auxiliary contacts   | Spring-type terminals   |
| of magnet coil  | Spring-type terminals   |
| type of connectable conductor cross-sections for main contacts  | 0 (4 40 0   |
| • solid   | 2x (1 10 mm²)   |
| solid or stranded   | 2x (1 10 mm²)   |
| finely stranded with core end processing  | 2x (1 6 mm²)  |
| finely stranded without core end processing   | 2x (1 6 mm²)  |
| connectable conductor cross-section for main contacts   | 4 40 2  |
| • solid   | 1 10 mm²  |
| stranded  - finally expanded with easy and processing.  | 1 10 mm²  |
| finely stranded with core end processing  | 1 6 mm²   |
| finely stranded without core end processing   | 1 6 mm²   |
| connectable conductor cross-section for auxiliary contacts  | 0.5 2.5 mm²   |
| solid or stranded     finely stranded with core and processing.   | 0.5 2.5 mm <sup>2</sup>   |
| finely stranded with core end processing     finely stranded without core and processing                          | 0.5 1.5 mm²   |
| finely stranded without core end processing  type of connectable conductor excess sections.                       | 0.5 2.5 mm²   |
| type of connectable conductor cross-sections  |   |
| for auxiliary contacts     — solid or stranded  | 2v (0.5 2.5 mm²)  |
|   | 2x (0.5 2.5 mm²)  |
| <ul> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> </ul> | 2x (0.5 1.5 mm²)<br>2x (0.5 2.5 mm²)  |
| Inner stranded without core end processing     for AWG cables for auxiliary contacts                              |   |
| AWG number as coded connectable conductor cross section   | 2x (20 14)  |
| for main contacts   | 18 8  |
| for auxiliary contacts  | 20 14   |
| Safety related data   |   |
| product function  |   |
| mirror contact according to IEC 60947-4-1   | Yes   |
| ~   |   |
| <ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>  | No  |

| B10 value with high demand rate according to SN 31920                   | 450 000  |
|---|--|
| proportion of dangerous failures  |  |
| <ul> <li>with low demand rate according to SN 31920</li> </ul>          | 40 %   |
| <ul> <li>with high demand rate according to SN 31920</li> </ul>         | 73 %   |
| failure rate [FIT] with low demand rate according to SN 31920           | 100 FIT  |
| T1 value for proof test interval or service life according to IEC 61508 | 20 a   |
| protection class IP on the front according to IEC 60529                 | IP20   |
| touch protection on the front according to IEC 60529                    | finger-safe, for vertical contact from the front |

### **General Product Approval**





Confirmation



**KC** 



**Functional** ЕМС Safety/Safety of Machinery

**Declaration of Conformity** 

**Test Certificates** 



Type Examination Cer**tificate** 





Type Test Certificates/Test Report

Special Test Certific-<u>ate</u>

#### Marine / Shipping













Marine / Shipping

other

Railway

**Dangerous Good** 

Environment



Confirmation



Vibration and Shock

**Transport Information** 

**Environmental Confirmations** 

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2024-2BB44

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2024-2BB44

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT20


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2024-2BB44&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2024-2BB44&lang=en</a>


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2024-2BB44/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2024-2BB44&objecttype=14&gridview=view1







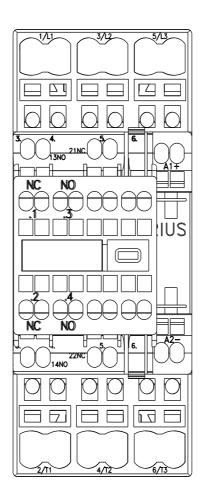

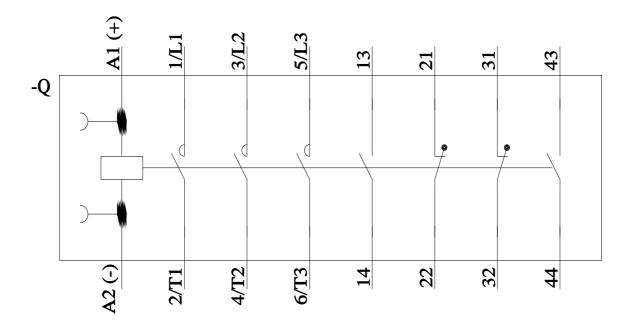

last modified: 8/15/2023 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20242BB44