# **SIEMENS**

### **Data sheet**

3RT2026-2CK64-3MA0



power contactor, AC-3e/AC-3, 25 A, 11 kW / 400 V, 3-pole, 110 V AC, 50 Hz / 120 V, 60 Hz, with plugged-in varistor, auxiliary contacts: 2 NO + 2 NC, spring-loaded terminal, size: S0, captive auxiliary switch

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S0
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	No
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	5.7 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	1.9 W
<ul> <li>without load current share typical</li> </ul>	2.7 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	8,3g / 5 ms, 5,3g / 10 ms
shock resistance with sine pulse	
• at AC	13,5g / 5 ms, 8,3g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Blei - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	

number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
at AC-3e rated value maximum	690 V
operational current	
at AC-1 at 400 V at ambient temperature 40 °C rated	40 A
value	
• at AC-1	40.4
<ul> <li>up to 690 V at ambient temperature 40 °C rated value</li> </ul>	40 A
— up to 690 V at ambient temperature 60 °C rated	35 A
value	
• at AC-3	
— at 400 V rated value	25 A
— at 500 V rated value	18 A
— at 690 V rated value	13 A
• at AC-3e	
— at 400 V rated value	25 A
— at 500 V rated value	18 A
— at 690 V rated value	13 A
• at AC-4 at 400 V rated value	15.5 A
• at AC-5a up to 690 V rated value	35.2 A
• at AC-5b up to 400 V rated value	20.7 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	20.2 A
— up to 400 V for current peak value n=20 rated value	20.2 A
— up to 500 V for current peak value n=20 rated value	20.2 A
— up to 690 V for current peak value n=20 rated value	12.9 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	13.5 A
— up to 400 V for current peak value n=30 rated value	13.5 A
— up to 500 V for current peak value n=30 rated value	13.5 A
— up to 690 V for current peak value n=30 rated value	13 A
minimum cross-section in main circuit at maximum AC-1 rated	10 mm²
value operational current for approx. 200000 operating cycles at	
AC-4	
at 400 V rated value	9 A
at 690 V rated value	9 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	35 A
— at 60 V rated value	20 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
<ul> <li>with 2 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
<ul> <li>with 3 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	35 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A

• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	20 A
— at 60 V rated value	5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.09 A
— at 600 V rated value	0.06 A
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	15 A
— at 220 V rated value	3 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	10 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
operating power	
• at AC-2 at 400 V rated value	11 kW
• at AC-3	
— at 230 V rated value	5.5 kW
— at 400 V rated value	11 kW
— at 500 V rated value	11 kW
— at 690 V rated value	11 kW
• at AC-3e	TTWY
— at 230 V rated value	5.5 kW
— at 400 V rated value	11 kW
	11 kW
— at 500 V rated value	
— at 690 V rated value	11 kW
operating power for approx. 200000 operating cycles at AC-	
at 400 V rated value	4.4 kW
at 690 V rated value	7.7 kW
operating apparent power at AC-6a	
up to 230 V for current peak value n=20 rated value	8 kVA
• up to 400 V for current peak value n=20 rated value	13.9 kVA
up to 500 V for current peak value n=20 rated value	17.4 kVA
up to 690 V for current peak value n=20 rated value	15.4 kVA
operating apparent power at AC-6a	
up to 230 V for current peak value n=30 rated value	5.3 kVA
	9.3 kVA
up to 400 V for current peak value n=30 rated value	
up to 500 V for current peak value n=30 rated value      up to 600 V for current peak value n=30 rated value	11.6 kVA
up to 690 V for current peak value n=30 rated value      short time withstand current in cold expecting state up to	15.5 kVA
short-time withstand current in cold operating state up to 40 °C	
limited to 1 s switching at zero current maximum	375 A; Use minimum cross-section acc. to AC-1 rated value
limited to 5 s switching at zero current maximum	300 A; Use minimum cross-section acc. to AC-1 rated value
limited to 3 s switching at zero current maximum	210 A; Use minimum cross-section acc. to AC-1 rated value
Ilmited to 30 s switching at zero current maximum	144 A; Use minimum cross-section acc. to AC-1 rated value
Ilmited to 50 s switching at zero current maximum     Ilmited to 60 s switching at zero current maximum	118 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	11074, OSC Hilliminum Gross-Section acc. to AC-1 rated value
	5 000 1/h
• at AC	5 000 1/h
operating frequency	4 000 4/h
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
at AC-3e maximum	750 1/h
• at AC-4 maximum	250 1/h

Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	110 V
at 60 Hz rated value	120 V
operating range factor control supply voltage rated value of	
magnet coil at AC	
● at 50 Hz	0.8 1.1
● at 60 Hz	0.8 1.1
design of the surge suppressor	with varistor
apparent pick-up power of magnet coil at AC	
● at 50 Hz	81 VA
● at 60 Hz	79 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.72
● at 60 Hz	0.74
apparent holding power of magnet coil at AC	
● at 50 Hz	10.5 VA
• at 60 Hz	8.5 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.25
● at 60 Hz	0.28
closing delay	
• at AC	8 40 ms
opening delay	
• at AC	4 16 ms
arcing time	10 10 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous	2
contact	
number of NO contacts for auxiliary contacts instantaneous contact	2
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	6 A
at 400 V rated value	3 A
at 500 V rated value	2 A
■ at 500 v taleu value	
at 690 V rated value	1 A
at 690 V rated value     operational current at DC-12	1 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> </ul>	1 A 10 A
at 690 V rated value  operational current at DC-12      at 24 V rated value      at 48 V rated value	1 A 10 A 6 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value	1 A 10 A 6 A 6 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value	1 A  10 A 6 A 6 A 3 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value	1 A  10 A 6 A 6 A 3 A 2 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value	1 A  10 A 6 A 6 A 3 A 2 A 1 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value	1 A  10 A 6 A 6 A 3 A 2 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  operational current at DC-13	1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  at 24 V rated value  at 24 V rated value	1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  operational current at DC-13	1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  at 600 V rated value  at 600 V rated value  operational current at DC-13  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 60 V rated value  at 60 V rated value	1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  at 600 V rated value  operational current at DC-13  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 60 V rated value  at 110 V rated value  at 110 V rated value	1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  at 600 V rated value  at 600 V rated value  operational current at DC-13  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 60 V rated value  at 110 V rated value  at 110 V rated value  at 125 V rated value	1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  at 600 V rated value  at 600 V rated value  operational current at DC-13  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 110 V rated value  at 125 V rated value  at 125 V rated value  at 125 V rated value  at 220 V rated value	1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  at 600 V rated value  at 600 V rated value  operational current at DC-13  at 24 V rated value  at 48 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 125 V rated value  at 120 V rated value  at 220 V rated value  at 600 V rated value	1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  at 600 V rated value  operational current at DC-13  at 24 V rated value  at 48 V rated value  at 48 V rated value  at 110 V rated value  at 125 V rated value  at 60 V rated value  at 110 V rated value  at 120 V rated value  at 125 V rated value  at 125 V rated value  at 125 V rated value  at 600 V rated value	1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  operational current at DC-13  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 60 V rated value  at 110 V rated value  at 60 V rated value  at 60 V rated value  at 125 V rated value  at 600 V rated value  contact reliability of auxiliary contacts  UL/CSA ratings	1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  at 600 V rated value  at 600 V rated value  operational current at DC-13  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 60 V rated value  at 110 V rated value  at 110 V rated value  at 125 V rated value  at 125 V rated value  cat 220 V rated value  at 600 V rated value  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	1 A  10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  at 600 V rated value  operational current at DC-13  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 60 V rated value  at 110 V rated value  at 110 V rated value  at 125 V rated value  at 125 V rated value  cat 220 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  at 480 V rated value	1 A  10 A 6 A 6 A 8 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 690 V rated value  operational current at DC-12  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 110 V rated value  at 125 V rated value  at 220 V rated value  at 600 V rated value  at 600 V rated value  at 600 V rated value  operational current at DC-13  at 24 V rated value  at 48 V rated value  at 60 V rated value  at 60 V rated value  at 110 V rated value  at 110 V rated value  at 125 V rated value  at 125 V rated value  cat 220 V rated value  at 600 V rated value  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	1 A  10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)

<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	2 hp
— at 230 V rated value	3 hp
<ul> <li>for 3-phase AC motor</li> </ul>	
— at 200/208 V rated value	5 hp
<ul> <li>— at 220/230 V rated value</li> </ul>	7.5 hp
— at 460/480 V rated value	15 hp
— at 575/600 V rated value	20 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
for short-circuit protection of the main circuit	
— with type of coordination 1 required	gG: 100 A (690 V, 100 kA), aM: 50 A (690 V, 100 kA), BS88: 100 A (415 V, 80 kA)
— with type of assignment 2 required	gG: 35A (690V, 100kA), aM: 20A (690V, 100kA), BS88: 35A (415V, 80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	102 mm
width	45 mm
depth	144 mm
required spacing	
<ul> <li>with side-by-side mounting</li> </ul>	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
for grounded parts	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	V IIIII
type of electrical connection	and a landed towningly
for main current circuit     for applications and control circuit	spring-loaded terminals
for auxiliary and control circuit	spring-loaded terminals
at contactor for auxiliary contacts	Spring-type terminals
of magnet coil	Spring-type terminals
type of connectable conductor cross-sections for main contacts	
• solid	2x (1 10 mm²)
• solid or stranded	2x (1 10 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 6 mm²)
finely stranded without core end processing	2x (1 6 mm²)
connectable conductor cross-section for main contacts	
• solid	1 10 mm²
• stranded	1 10 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	1 6 mm²
• finely stranded without core end processing	1 6 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 2.5 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 1.5 mm²
finely stranded without core end processing	0.5 2.5 mm²
type of connectable conductor cross-sections	
-7	

<ul> <li>for auxiliary contacts</li> </ul>	
<ul> <li>solid or stranded</li> </ul>	2x (0.5 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²)
<ul> <li>finely stranded without core end processing</li> </ul>	2x (0.5 2.5 mm²)
for AWG cables for auxiliary contacts	2x (20 14)
AWG number as coded connectable conductor cross section	
<ul> <li>for main contacts</li> </ul>	18 8
<ul> <li>for auxiliary contacts</li> </ul>	20 14
Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No
suitability for use safety-related switching OFF	Yes
B10 value with high demand rate according to SN 31920	450 000
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Certificates/ approvals	

## General Product Approval





Confirmation



<u>KC</u>



EMC Safety/Safety of Machinery Declaration of Conformity Test Certificates Marine / Shipping
--



Type Examination Certificate





Type Test Certificates/Test Report



#### Marine / Shipping













other Railway Environment

Confirmation



Vibration and Shock

Environmental Confirmations

#### Further informatior

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2026-2CK64-3MA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2026-2CK64-3MA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2026-2CK64-3MA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2026-2CK64-3MA0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2026-2CK64-3MA0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2026-2CK64-3MA0&objecttype=14&gridview=view1







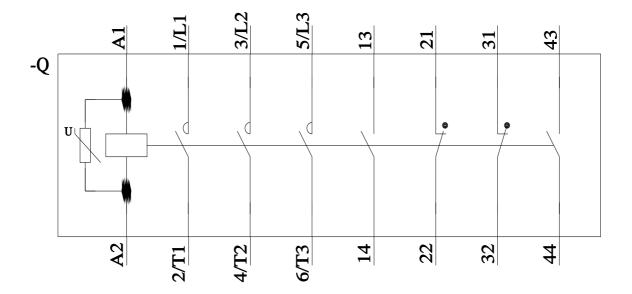

last modified: 8/15/2023 🖸

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20262CK643MA0