SIEMENS

Data sheet 3RT2027-1BG40



power contactor, AC-3e/AC-3, 32 A, 15 kW / 400 V, 3-pole, 125 V DC, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S0 $\,$

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S0
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	6.3 W
 at AC in hot operating state per pole 	2.3 W
without load current share typical	5.9 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at DC	10g / 5 ms, 7,5g / 10 ms
shock resistance with sine pulse	
• at DC	15g / 5 ms, 10g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

	3
operating voltage	
 at AC-3 rated value maximum 	690 V
at AC-3e rated value maximum	690 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated	50 A
value	
• at AC-1	
 up to 690 V at ambient temperature 40 °C rated value 	50 A
— up to 690 V at ambient temperature 60 °C rated	42 A
value	
• at AC-3	
— at 400 V rated value	32 A
— at 500 V rated value	32 A
— at 690 V rated value	21 A
• at AC-3e	
— at 400 V rated value	32 A
— at 500 V rated value	32 A
— at 690 V rated value	21 A
• at AC-4 at 400 V rated value	22 A
• at AC-5a up to 690 V rated value	44 A
• at AC-5b up to 400 V rated value	26.5 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	30.8 A
— up to 400 V for current peak value n=20 rated value	30.8 A
— up to 500 V for current peak value n=20 rated value	27 A
— up to 690 V for current peak value n=20 rated value	21 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	20.5 A
— up to 400 V for current peak value n=30 rated value	20.5 A
— up to 500 V for current peak value n=30 rated value	18 A
— up to 690 V for current peak value n=30 rated value	18 A
minimum cross-section in main circuit at maximum AC-1 rated	
	10 mm²
value	10 mm ²
	10 mm²
value operational current for approx. 200000 operating cycles at	10 mm²
value operational current for approx. 200000 operating cycles at AC-4	
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value	12 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value	12 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current	12 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1	12 A 12 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value	12 A 12 A 35 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value	12 A 12 A 35 A 20 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value	12 A 12 A 35 A 20 A 4.5 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 440 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 22 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 600 V rated value — at 600 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 60 V rated value — at 110 V rated value — at 110 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 24 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value — at 220 V rated value — at 600 V rated value — at 24 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value	12 A 12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 35 A 35 A
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 600 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 600 V rated value — at 440 V rated value — at 600 V rated value	12 A 12 A 12 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 35 A 36 A 37 A 38 A 38 A 39 A 30 A 30 A
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value — at 220 V rated value — at 220 V rated value — at 24 V rated value — at 240 V rated value — at 440 V rated value — at 600 V rated value	12 A 12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 36 A 37 A 38
poperational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value • at 110 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value — at 600 V rated value — at 440 V rated value — at 220 V rated value — at 220 V rated value — at 220 V rated value — at 24 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value • with 3 current paths in series at DC-1 — at 24 V rated value • with 3 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value	12 A 12 A 12 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 36 A 37 A 38
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 24 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value — at 60 V rated value — at 60 V rated value — at 220 V rated value — at 24 V rated value — at 24 V rated value — at 24 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 3 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 110 V rated value — at 110 V rated value	12 A 12 A 12 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 36 A 37 A 38
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 220 V rated value — at 24 V rated value — at 24 V rated value — at 24 V rated value — at 600 V rated value — at 24 V rated value — at 24 V rated value — at 24 V rated value — at 20 V rated value	12 A 12 A 12 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 35 A 36 A 37 A 38
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 24 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value — at 60 V rated value — at 60 V rated value — at 220 V rated value — at 24 V rated value — at 24 V rated value — at 24 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 3 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 110 V rated value — at 110 V rated value	12 A 12 A 12 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 36 A 37 A 38

— at 24 V rated value	20 A
— at 60 V rated value	5 A
— at 110 V rated value	2.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.09 A
— at 600 V rated value	0.06 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	15 A
— at 220 V rated value	3 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	10 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
operating power	
• at AC-2 at 400 V rated value	15 kW
• at AC-3	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	15 kW
— at 690 V rated value	18.5 kW
• at AC-3e	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	15 kW
— at 690 V rated value	18.5 kW
operating power for approx. 200000 operating cycles at AC-	
• at 400 V rated value	6 kW
• at 690 V rated value	10.3 kW
operating apparent power at AC-6a	
up to 230 V for current peak value n=20 rated value	12.2 kVA
 up to 400 V for current peak value n=20 rated value 	21.3 kVA
up to 500 V for current peak value n=20 rated value	23.3 kVA
• up to 690 V for current peak value n=20 rated value	25 kVA
operating apparent power at AC-6a	
up to 230 V for current peak value n=30 rated value	8.1 kVA
• up to 400 V for current peak value n=30 rated value	14.2 kVA
• up to 500 V for current peak value n=30 rated value	15.5 kVA
• up to 690 V for current peak value n=30 rated value	21.5 kVA
short-time withstand current in cold operating state up to 40 °C	
limited to 1 s switching at zero current maximum	499 A; Use minimum cross-section acc. to AC-1 rated value
limited to 13 switching at zero current maximum	341 A; Use minimum cross-section acc. to AC-1 rated value
limited to 3 s switching at zero current maximum limited to 10 s switching at zero current maximum	260 A; Use minimum cross-section acc. to AC-1 rated value
limited to 10 3 switching at zero current maximum limited to 30 s switching at zero current maximum	199 A; Use minimum cross-section acc. to AC-1 rated value
limited to 60 s switching at zero current maximum	162 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	, , , , , , , , , , , , , , , , , , , ,
• at DC	1 500 1/h
operating frequency	
at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
at AC-3e maximum	750 1/h
• at AC-4 maximum	250 1/h
- acro i maximall	

Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC	
• rated value	125 V
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.8
• full-scale value	1.1
closing power of magnet coil at DC	5.9 W
holding power of magnet coil at DC	5.9 W
closing delay	
• at DC	50 170 ms
opening delay	
• at DC	15 18 ms
arcing time	10 10 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	10 A
• at 400 V rated value	3 A
at 500 V rated value	2 A
at 690 V rated value	1 A
operational current at DC-12	
at 24 V rated value	10 A
at 48 V rated value	6 A
at 60 V rated value	6 A
• at 110 V rated value	3 A
at 125 V rated value	2 A
at 220 V rated value at 600 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	10 A
 at 24 V rated value at 48 V rated value 	10 A 2 A
at 60 V rated value at 60 V rated value	2 A
at 110 V rated value	1 A
at 115 V rated value at 125 V rated value	0.9 A
at 220 V rated value at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	,
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	27 A
at 600 V rated value	27 A
yielded mechanical performance [hp]	
• for single-phase AC motor	
— at 110/120 V rated value	2 hp
— at 230 V rated value	5 hp
• for 3-phase AC motor	
— at 200/208 V rated value	10 hp
— at 220/230 V rated value	10 hp
— at 460/480 V rated value	20 hp
— at 575/600 V rated value	25 hp
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
 for short-circuit protection of the main circuit 	

 — with type of coordination 1 required 	gG: 125A (690V,100kA), aM: 50A (690V,100kA), BS88: 125A (415V,80kA)
with type of assignment 2 required	gG: 50A (690V,100kA), aM: 25A (690V, 100kA), BS88: 50A (415V, 80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	85 mm
width	45 mm
depth	107 mm
required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
• for grounded parts	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
• for live parts	10 mm
— forwards	10 mm
— upwards — downwards	10 mm
— at the side	6 mm
Connections/ Terminals	O IIIIII
type of electrical connection • for main current circuit	corow typo terminals
for auxiliary and control circuit	screw-type terminals screw-type terminals
at contactor for auxiliary contacts	Screw-type terminals Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections for main contacts	out w type terminals
• solid	2x (1 2.5 mm²), 2x (2.5 10 mm²)
solid or stranded	2x (1 2.5 mm²), 2x (2.5 10 mm²)
finely stranded with core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
connectable conductor cross-section for main contacts	
• solid	1 10 mm²
• stranded	1 10 mm²
finely stranded with core end processing	1 10 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 2.5 mm²
• finely stranded with core end processing	0.5 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
for AWG cables for auxiliary contacts	2x (20 16), 2x (18 14)
AWG number as coded connectable conductor cross section	
• for main contacts	16 8
for auxiliary contacts	20 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
suitability for use safety-related switching OFF	Yes
B10 value with high demand rate according to SN 31920	450 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %

failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Certificates/ approvals

General Product Approval





Confirmation



KC



|--|



Type Examination Cer**tificate**





Type Test Certificates/Test Report

Special Test Certific-<u>ate</u>

Marine / Shipping













other Railway **Dangerous Good Environment**

Confirmation



Vibration and Shock

Transport Information

Environmental Confirmations

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2027-1BG40

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2027-1BG40

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2027-1BG40


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2027-1BG40&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2027-1BG40/char


Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2027-1BG40&objecttype=14&gridview=view1







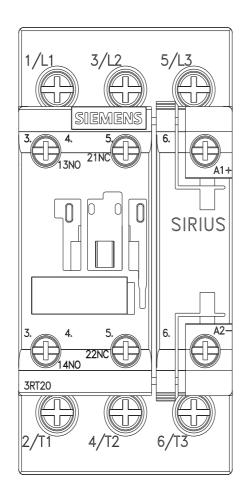

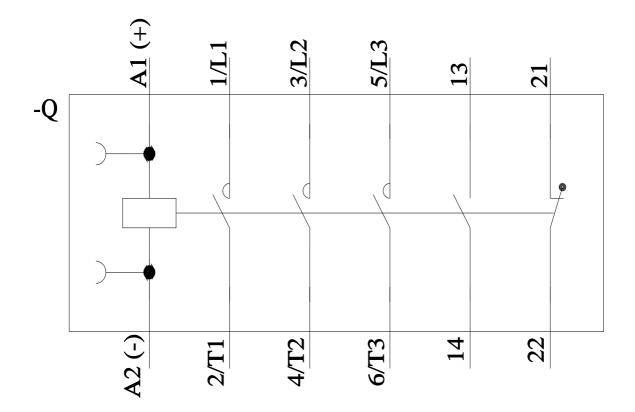

last modified: 8/15/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20271BG40