3RT2027-2AK64-3MA0

Data sheet



power contactor, AC-3e/AC-3, 32 A, 15 kW / 400 V, 3-pole, 110 V AC, 50 Hz / 120 V, 60 Hz, auxiliary contacts: 2 NO + 2 NC, spring-loaded terminal, size: S0, captive auxiliary switch, no surge suppressor retrofittable

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S0
product extension	
 function module for communication 	No
auxiliary switch	No
power loss [W] for rated value of the current	
 at AC in hot operating state 	6.3 W
 at AC in hot operating state per pole 	2.3 W
without load current share typical	2.7 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	8,3g / 5 ms, 5,3g / 10 ms
shock resistance with sine pulse	
• at AC	13,5g / 5 ms, 8,3g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
• at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	
 at AC-1 at 400 V at ambient temperature 40 °C rated 	50 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated	50 A
value	40 A
 up to 690 V at ambient temperature 60 °C rated value 	42 A
• at AC-3	
— at 400 V rated value	32 A
— at 500 V rated value	32 A
— at 690 V rated value	21 A
• at AC-3e	
— at 400 V rated value	32 A
— at 500 V rated value	32 A
	21 A
— at 690 V rated value● at AC-4 at 400 V rated value	22 A
	44 A
at AC-5a up to 690 V rated value	
at AC-5b up to 400 V rated value	26.5 A
• at AC-6a	00.0 A
— up to 230 V for current peak value n=20 rated value	30.8 A
— up to 400 V for current peak value n=20 rated value	30.8 A
— up to 500 V for current peak value n=20 rated value	27 A
— up to 690 V for current peak value n=20 rated value	21 A
• at AC-6a	
 up to 230 V for current peak value n=30 rated value 	20.5 A
 up to 400 V for current peak value n=30 rated value 	20.5 A
 up to 500 V for current peak value n=30 rated value 	18 A
 up to 690 V for current peak value n=30 rated value 	18 A
minimum cross-section in main circuit at maximum AC-1 rated value	10 mm²
operational current for approx. 200000 operating cycles at	
AC-4	
• at 400 V rated value	12 A
• at 690 V rated value	12 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	35 A
— at 60 V rated value	20 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
with 2 current paths in series at DC-1	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	5 A
— at 440 V rated value	1A
— at 600 V rated value	0.8 A
with 3 current paths in series at DC-1 at 24 V rated value.	25 A
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	35 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
 at 1 current path at DC-3 at DC-5 	

at 24 V rated value	30 A
— at 24 V rated value	20 A
— at 60 V rated value	5.A
— at 220 V rated value	1 A
— at 440 V rated value	0.09 A
— at 600 V rated value	0.06 A
with 2 current paths in series at DC-3 at DC-5	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	15 A
— at 220 V rated value	3 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	10 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
operating power	
• at AC-2 at 400 V rated value	15 kW
• at AC-3	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	15 kW
— at 690 V rated value	18.5 kW
• at AC-3e	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	15 kW
— at 690 V rated value	18.5 kW
operating power for approx. 200000 operating cycles at AC-	
4	
 at 400 V rated value 	6 kW
at 690 V rated value	10.3 kW
operating apparent power at AC-6a	
	12.2 kVA
 up to 230 V for current peak value n=20 rated value 	12.2 1077
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value 	21.3 kVA
·	
• up to 400 V for current peak value n=20 rated value	21.3 kVA
 up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value 	21.3 kVA 23.3 kVA
 up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value 	21.3 kVA 23.3 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a	21.3 kVA 23.3 kVA 25 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 21.5 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 21.5 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum Ilimited to 5 s switching at zero current maximum	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 21.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum Ilimited to 10 s switching at zero current maximum	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 21.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum Ilimited to 10 s switching at zero current maximum Ilimited to 30 s switching at zero current maximum	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum Ilimited to 5 s switching at zero current maximum Ilimited to 30 s switching at zero current maximum Ilimited to 60 s switching at zero current maximum	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum Ilimited to 5 s switching at zero current maximum Ilimited to 30 s switching at zero current maximum Ilimited to 60 s switching at zero current maximum Ilimited to 60 s switching at zero current maximum	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 21.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum Ilimited to 10 s switching at zero current maximum Ilimited to 30 s switching at zero current maximum Ilimited to 60 s switching at zero current maximum alimited to 60 s switching at zero current maximum ro-load switching frequency at AC	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 21.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum Ilimited to 5 s switching at zero current maximum Ilimited to 30 s switching at zero current maximum Ilimited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum ro-load switching frequency at AC operating frequency	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 21.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 192 A; Use minimum cross-section acc. to AC-1 rated value 193 A; Use minimum cross-section acc. to AC-1 rated value 194 A; Use minimum cross-section acc. to AC-1 rated value
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum Ilimited to 5 s switching at zero current maximum Ilimited to 30 s switching at zero current maximum Ilimited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum b limited to 60 s switching at zero current maximum a limited to 60 s switching at zero current maximum b limited to 60 s switching at zero current maximum	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 21.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 192 A; Use minimum cross-section acc. to AC-1 rated value 193 A; Use minimum cross-section acc. to AC-1 rated value 194 A; Use minimum cross-section acc. to AC-1 rated value
 up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum no-load switching frequency at AC operating frequency at AC-2 maximum 	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 21.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 192 A; Use minimum cross-section acc. to AC-1 rated value 15 000 1/h 1 000 1/h 1 000 1/h 750 1/h
 up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 60 s switching at zero current maximum no-load switching frequency at AC operating frequency at AC-2 maximum at AC-3 maximum 	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 21.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 190 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 160 A; Use minimum cross-section acc. to AC-1 rated value
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum Ilimited to 10 s switching at zero current maximum Ilimited to 30 s switching at zero current maximum Ilimited to 60 s switching at zero current maximum alimited to 60 s switching at zero current maximum ro-load switching frequency at AC-1 maximum at AC-3 maximum at AC-3 maximum at AC-3 maximum at AC-3 e maximum	21.3 kVA 23.3 kVA 25 kVA 8.1 kVA 14.2 kVA 15.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 1 000 1/h 750 1/h 750 1/h 750 1/h

type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	110 V
at 60 Hz rated value	120 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	81 VA
• at 60 Hz	79 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.72
• at 60 Hz	0.74
apparent holding power of magnet coil at AC	
• at 50 Hz	10.5 VA
• at 60 Hz	8.5 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.25
• at 60 Hz	0.28
closing delay	
• at AC	8 40 ms
opening delay	
• at AC	4 16 ms
arcing time	10 10 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	2
number of NO contacts for auxiliary contacts instantaneous contact	2
	2 10 A
contact	
contact operational current at AC-12 maximum	
contact operational current at AC-12 maximum operational current at AC-15	10 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value	10 A 6 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value	10 A 6 A 3 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value	10 A 6 A 3 A 2 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value	10 A 6 A 3 A 2 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value	10 A 6 A 3 A 2 A 1 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value	10 A 6 A 3 A 2 A 1 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 110 V rated value • at 125 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value operational current at DC-13 • at 24 V rated value • at 48 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 110 V rated value • at 24 V rated value • at 25 V rated value • at 18 V rated value • at 110 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 125 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 125 V rated value • at 125 V rated value • at 125 V rated value • at 600 V rated value • at 600 V rated value • at 124 V rated value • at 125 V rated value • at 125 V rated value • at 24 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 100 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 60 V rated value • at 60 V rated value • at 125 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 155 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value • at 60 V rated value • at 600 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 110 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value • at 30 V rated value • at 30 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 126 V rated value • at 127 V rated value • at 128 V rated value • at 129 V rated value • at 100 V rated value • at 100 V rated value • at 100 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 60 V rated value • at 60 V rated value • at 10 V rated value • at 10 V rated value • at 10 V rated value • at 125 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 26 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 600 V rated value • at 480 V rated value • at 480 V rated value • at 480 V rated value • at 600 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 600 V rated value • at 125 V rated value • at 480 V rated value • at 600 V rated value • at 600 V rated value • at 480 V rated value • at 480 V rated value • at 480 V rated value • at 600 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 26 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 600 V rated value • at 480 V rated value • at 480 V rated value • at 480 V rated value • at 600 V rated value	10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)

— at 230 V rated value	5 hp
• for 3-phase AC motor	
— at 200/208 V rated value	10 hp
— at 220/230 V rated value	10 hp
— at 460/480 V rated value	20 hp
— at 575/600 V rated value	25 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
 for short-circuit protection of the main circuit 	
 — with type of coordination 1 required 	gG: 125A (690V,100kA), aM: 50A (690V,100kA), BS88: 125A (415V,80kA)
 — with type of assignment 2 required 	gG: 50A (690V,100kA), aM: 25A (690V, 100kA), BS88: 50A (415V, 80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	102 mm
width	45 mm
depth	144 mm
required spacing	
 with side-by-side mounting 	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
 for grounded parts 	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	spring-loaded terminals
 for auxiliary and control circuit 	spring-loaded terminals
 at contactor for auxiliary contacts 	Spring-type terminals
of magnet coil	Spring-type terminals
type of connectable conductor cross-sections for main contacts	
• solid	2x (1 10 mm²)
 solid or stranded 	2x (1 10 mm²)
 finely stranded with core end processing 	2x (1 6 mm²)
finely stranded without core end processing	2x (1 6 mm²)
connectable conductor cross-section for main contacts	
• solid	1 10 mm²
• stranded	
 finely stranded with core end processing 	1 10 mm²
3	1 10 mm ² 1 6 mm ²
finely stranded without core end processing	
	1 6 mm²
finely stranded without core end processing	1 6 mm²
finely stranded without core end processing connectable conductor cross-section for auxiliary contacts	1 6 mm ² 1 6 mm ²
finely stranded without core end processing connectable conductor cross-section for auxiliary contacts solid or stranded	1 6 mm ² 1 6 mm ² 0.5 2.5 mm ²
finely stranded without core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing	1 6 mm ² 1 6 mm ² 0.5 2.5 mm ² 0.5 1.5 mm ²
finely stranded without core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing finely stranded without core end processing	1 6 mm ² 1 6 mm ² 0.5 2.5 mm ² 0.5 1.5 mm ²
finely stranded without core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing finely stranded without core end processing type of connectable conductor cross-sections	1 6 mm ² 1 6 mm ² 0.5 2.5 mm ² 0.5 1.5 mm ²

 finely stranded without core end processing 	2x (0.5 2.5 mm²)
 for AWG cables for auxiliary contacts 	2x (20 14)
AWG number as coded connectable conductor cross section	
• for main contacts	18 8
 for auxiliary contacts 	20 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 positively driven operation according to IEC 60947-5-1 	No
suitability for use safety-related switching OFF	Yes
B10 value with high demand rate according to SN 31920	450 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Certificates/ approvals	

General Product Approval





Confirmation



<u>KC</u>



Functional EMC Safety/Safety of Ma-**Declaration of Conformity Test Certificates** Marine / Shipping chinery



Type Examination Certificate





Type Test Certificates/Test Report



Marine / Shipping













other Railway **Environment**

Confirmation



Confirmation

Vibration and Shock

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

m/mall/en/en/Catalog/product?mlfb=3RT2027-2AK64-3MA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2027-2AK64-3MA0

http://support.automation.siemens.com/vvvvv/or/xcitations/service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2027-2


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax de.aspx?mlfb=3RT2027-2AK64-3MA0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2027-2AK64-3MA0/char


Further characteristics (e.g. electrical endurance, switching frequency)

3RT2027-2AK64-3MA0&objecttype=14&gridview=view1







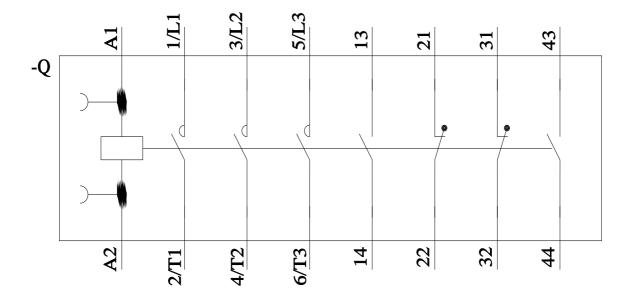

last modified: 8/15/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20272AK643MA0