3RT2028-2AK64-3MA0

Data sheet



power contactor, AC-3e/AC-3, 38 A, 18.5 kW / 400 V, 3-pole, 110 V AC, 50 Hz / 120 V, 60 Hz, auxiliary contacts: 2 NO + 2 NC, spring-loaded terminal, size: S0, captive auxiliary switch, no surge suppressor retrofittable

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S0
product extension	
 function module for communication 	No
auxiliary switch	No
power loss [W] for rated value of the current	
 at AC in hot operating state 	9.6 W
 at AC in hot operating state per pole 	3.2 W
without load current share typical	2.7 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	8,3g / 5 ms, 5,3g / 10 ms
shock resistance with sine pulse	
• at AC	13,5g / 5 ms, 8,3g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

	3
operating voltage	
 at AC-3 rated value maximum 	690 V
at AC-3e rated value maximum	690 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated	50 A
value	
• at AC-1	
 up to 690 V at ambient temperature 40 °C rated value 	50 A
— up to 690 V at ambient temperature 60 °C rated	42 A
value	
• at AC-3	
— at 400 V rated value	38 A
— at 500 V rated value	32 A
— at 690 V rated value	21 A
• at AC-3e	
— at 400 V rated value	38 A
— at 500 V rated value	32 A
— at 690 V rated value	21 A
• at AC-4 at 400 V rated value	22 A
• at AC-5a up to 690 V rated value	44 A
• at AC-5b up to 400 V rated value	31.5 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	30.8 A
— up to 400 V for current peak value n=20 rated value	30.8 A
— up to 500 V for current peak value n=20 rated value	30.8 A
— up to 690 V for current peak value n=20 rated value	21 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	20.5 A
— up to 400 V for current peak value n=30 rated value	20.5 A
— up to 500 V for current peak value n=30 rated value	21.4 A
— up to 690 V for current peak value n=30 rated value	21 A
minimum cross-section in main circuit at maximum AC-1 rated	10 mm²
	10 11111
value	10 11111
value operational current for approx. 200000 operating cycles at	12 A
value operational current for approx. 200000 operating cycles at AC-4	
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value	12 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value	12 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current	12 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1	12 A 12 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value	12 A 12 A 35 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value	12 A 12 A 35 A 20 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value	12 A 12 A 35 A 20 A 4.5 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 440 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 22 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 600 V rated value — at 600 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A
value operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 60 V rated value — at 110 V rated value — at 110 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 24 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value	12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value — at 220 V rated value — at 600 V rated value — at 24 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value	12 A 12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 35 A 35 A
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 600 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 600 V rated value — at 440 V rated value — at 600 V rated value	12 A 12 A 12 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 35 A 36 A 37 A 38
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value — at 220 V rated value — at 240 V rated value — at 440 V rated value — at 440 V rated value — at 600 V rated value	12 A 12 A 12 A 35 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 36 A 37 A 38
poperational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value • at 110 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value — at 600 V rated value — at 440 V rated value — at 220 V rated value — at 220 V rated value — at 220 V rated value — at 24 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value • with 3 current paths in series at DC-1 — at 24 V rated value • with 3 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value	12 A 12 A 12 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 36 A 37 A 38
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 24 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value — at 60 V rated value — at 60 V rated value — at 220 V rated value — at 24 V rated value — at 24 V rated value — at 24 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 3 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 110 V rated value — at 110 V rated value	12 A 12 A 12 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 36 A 37 A 38
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 220 V rated value — at 24 V rated value — at 24 V rated value — at 24 V rated value — at 600 V rated value — at 24 V rated value — at 24 V rated value — at 24 V rated value — at 20 V rated value	12 A 12 A 12 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 35 A 36 A 37 A 38
operational current for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value — at 600 V rated value — at 24 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value — at 60 V rated value — at 60 V rated value — at 220 V rated value — at 24 V rated value — at 24 V rated value — at 24 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value • with 3 current paths in series at DC-1 — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 110 V rated value — at 110 V rated value	12 A 12 A 12 A 20 A 4.5 A 1 A 0.4 A 0.25 A 35 A 35 A 35 A 36 A 37 A 38

— at 24 V rated value	20 A		
— at 60 V rated value	5 A		
— at 220 V rated value	1A		
— at 440 V rated value	0.09 A		
— at 600 V rated value	0.06 A		
 with 2 current paths in series at DC-3 at DC-5 			
— at 24 V rated value	35 A		
— at 60 V rated value	35 A		
— at 110 V rated value	15 A		
— at 220 V rated value	3 A		
— at 440 V rated value	0.27 A		
— at 600 V rated value	0.16 A		
 with 3 current paths in series at DC-3 at DC-5 			
— at 24 V rated value	35 A		
— at 60 V rated value	35 A		
— at 110 V rated value	35 A		
— at 220 V rated value	10 A		
— at 440 V rated value	0.6 A		
— at 600 V rated value	0.6 A		
operating power			
at AC-2 at 400 V rated value	18.5 kW		
• at AC-3			
— at 230 V rated value	11 kW		
— at 400 V rated value	18.5 kW		
— at 500 V rated value	18.5 kW		
— at 690 V rated value	18.5 kW		
• at AC-3e	IO.S KVV		
	11 kW		
— at 230 V rated value			
— at 400 V rated value	18.5 kW		
— at 500 V rated value	18.5 kW		
— at 690 V rated value	18.5 kW		
operating power for approx. 200000 operating cycles at AC-			
4			
at 400 V rated value	6 kW		
	6 kW 10.3 kW		
at 400 V rated valueat 690 V rated value			
at 400 V rated value at 690 V rated value operating apparent power at AC-6a	10.3 kW		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value	10.3 kW 12.2 kVA		
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value 	10.3 kW 12.2 kVA 21.3 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value	10.3 kW 12.2 kVA 21.3 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 25 kVA		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum Ilimited to 10 s switching at zero current maximum	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 25 kVA 593 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value		
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum 	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 25 kVA 593 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value		
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value oup to 690 V for current peak value n=30 rated value hup to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum 	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 25 kVA 593 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value		
at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilimited to 1 s switching at zero current maximum Ilimited to 50 s switching at zero current maximum Ilimited to 30 s switching at zero current maximum Ilimited to 60 s switching at zero current maximum	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 25 kVA 593 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value		
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 25 kVA 593 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value		
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 50 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 25 kVA 593 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value		
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum no-load switching frequency at AC operating frequency at AC-1 maximum 	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 25 kVA 593 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value		
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value oup to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum no-load switching frequency at AC operating frequency at AC-2 maximum at AC-2 maximum 	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 25 kVA 593 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 1 000 1/h 750 1/h		
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum ro-load switching frequency at AC operating frequency at AC-1 maximum at AC-2 maximum at AC-3 maximum 	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 25 kVA 593 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 1 000 1/h 750 1/h 750 1/h		
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum no-load switching frequency at AC-1 maximum at AC-2 maximum at AC-3 maximum at AC-3 maximum at AC-3 maximum at AC-3 maximum 	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 593 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 1 000 1/h 750 1/h 750 1/h 750 1/h		
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum ro-load switching frequency at AC operating frequency at AC-1 maximum at AC-2 maximum at AC-3 maximum 	10.3 kW 12.2 kVA 21.3 kVA 26.6 kVA 25 kVA 8.1 kVA 14.2 kVA 18.5 kVA 25 kVA 593 A; Use minimum cross-section acc. to AC-1 rated value 341 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 199 A; Use minimum cross-section acc. to AC-1 rated value 192 A; Use minimum cross-section acc. to AC-1 rated value 193 A; Use minimum cross-section acc. to AC-1 rated value 194 A; Use minimum cross-section acc. to AC-1 rated value 195 O00 1/h 1 000 1/h 1 000 1/h 1 750 1/h		

type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	110 V
at 60 Hz rated value	120 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	81 VA
• at 60 Hz	79 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.72
• at 60 Hz	0.74
apparent holding power of magnet coil at AC	
• at 50 Hz	10.5 VA
• at 60 Hz	8.5 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.25
• at 60 Hz	0.28
closing delay	
• at AC	8 40 ms
opening delay	
• at AC	4 16 ms
arcing time	10 10 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	2
number of NO contacts for auxiliary contacts instantaneous contact	2
CONTACT	
operational current at AC-12 maximum	10 A
	10 A
operational current at AC-12 maximum	10 A 6 A
operational current at AC-12 maximum operational current at AC-15	
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value	6 A 3 A 2 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value	6 A 3 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12	6 A 3 A 2 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value	6 A 3 A 2 A 1 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value	6 A 3 A 2 A 1 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 24 V rated value • at 24 V rated value operational current at DC-13 • at 24 V rated value • at 48 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 48 V rated value • at 48 V rated value operational current at DC-13 • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 48 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value operational current at DC-13 • at 24 V rated value • at 60 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 110 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 125 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 150 V rated value • at 150 V rated value • at 150 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 26 V rated value • at 170 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 125 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 60 V rated value • at 60 V rated value • at 125 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 48 V rated value • at 60 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 80 V rated value • at 110 V rated value • at 110 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 100 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 600 V rated value • at 29 V rated value • at 20 V rated value • at 20 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 126 V rated value • at 127 V rated value • at 128 V rated value • at 129 V rated value • at 120 V rated value • at 120 V rated value • at 300 V rated value • at 480 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 126 V rated value • at 127 V rated value • at 128 V rated value • at 129 V rated value • at 120 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value • at 10 V rated value • at 60 V rated value • at 10 V rated value • at 110 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 600 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 126 V rated value • at 127 V rated value • at 100 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 480 V rated value • at 600 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 126 V rated value • at 127 V rated value • at 128 V rated value • at 129 V rated value • at 120 V rated value	6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)

— at 230 V rated value	5 hp		
• for 3-phase AC motor			
— at 200/208 V rated value	10 hp		
— at 220/230 V rated value	10 hp		
— at 460/480 V rated value	25 hp		
— at 575/600 V rated value	25 hp		
contact rating of auxiliary contacts according to UL	A600 / Q600		
Short-circuit protection			
design of the fuse link			
 for short-circuit protection of the main circuit 			
 — with type of coordination 1 required 	gG: 125A (690V,100kA), aM: 50A (690V,100kA), BS88: 125A (415V,80kA)		
 — with type of assignment 2 required 	gG: 50A (690V,100kA), aM: 25A (690V, 100kA), BS88: 50A (415V, 80kA)		
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)		
Installation/ mounting/ dimensions			
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface		
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715		
side-by-side mounting	Yes		
height	102 mm		
width	45 mm		
depth	144 mm		
required spacing			
with side-by-side mounting			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	0 mm		
 for grounded parts 			
— forwards	10 mm		
— upwards	10 mm		
— at the side	6 mm		
— downwards	10 mm		
for live parts			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	6 mm		
Connections/ Terminals			
type of electrical connection			
for main current circuit	spring-loaded terminals		
for auxiliary and control circuit	spring-loaded terminals		
at contactor for auxiliary contacts	Spring-type terminals		
of magnet coil	Spring-type terminals		
type of connectable conductor cross-sections for main contacts	2 // 12 2		
• solid	2x (1 10 mm²)		
solid or stranded	2x (1 10 mm²)		
finely stranded with core end processing	2x (1 6 mm²)		
finely stranded without core end processing	2x (1 6 mm²)		
connectable conductor cross-section for main contacts			
• solid	1 10 mm²		
• stranded	1 10 mm²		
finely stranded with core end processing	1 6 mm ²		
finely stranded without core end processing	1 6 mm²		
connectable conductor cross-section for auxiliary contacts	05.05.3		
solid or stranded	0.5 2.5 mm ²		
finely stranded with core end processing	0.5 1.5 mm ²		
finely stranded without core end processing	0.5 2.5 mm²		
type of connectable conductor cross-sections			
for auxiliary contacts			
— solid or stranded	2x (0.5 2.5 mm²)		
 finely stranded with core end processing 	2x (0.5 1.5 mm²)		

 finely stranded without core end processing 	2x (0.5 2.5 mm²)
 for AWG cables for auxiliary contacts 	2x (20 14)
AWG number as coded connectable conductor cross section	
 for main contacts 	18 8
 for auxiliary contacts 	20 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 positively driven operation according to IEC 60947-5-1 	No
suitability for use safety-related switching OFF	Yes
B10 value with high demand rate according to SN 31920	450 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Certificates/ approvals	

General Product Approval



Confirmation





<u>KC</u>



EMC Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates	Marine / Shipping
---	---------------------------	-------------------	-------------------



Type Examination Cer**tificate**





Type Test Certificates/Test Report



Marine / Shipping













other Railway **Environment**

Confirmation



Confirmation

Vibration and Shock

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

all.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2028-2AK64-3MA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2028-2AK64-3MA0

http://support.automation.siemens.com/vvvvv/or/xcitations/service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2028


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax de.aspx?mlfb=3RT2028-2AK64-3MA0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2028-2AK64-3MA0/char


Further characteristics (e.g. electrical endurance, switching frequency)

3RT2028-2AK64-3MA0&objecttype=14&gridview=view1







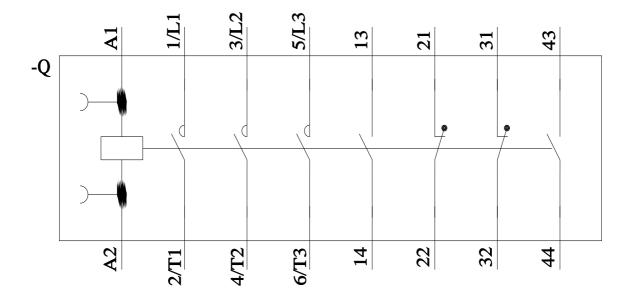

last modified: 8/15/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20282AK643MA0