# **SIEMENS**

Data sheet 3RT2035-1AD04



power contactor, AC-3e/AC-3, 41 A, 18.5 kW / 400 V, 3-pole, 42 V AC, 50 Hz, auxiliary contacts: 2 NO + 2 NC, screw terminal, size: S2, removable auxiliary switch

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	No
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	6.6 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.2 W
without load current share typical	6 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	9.8g / 5 ms, 6.5g / 10 ms
shock resistance with sine pulse	
• at AC	15.3g / 5 ms, 10.1g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul><li>during operation</li></ul>	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
at AC-3e rated value maximum	690 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated</li> </ul>	60 A
value	
• at AC-1	
<ul> <li>up to 690 V at ambient temperature 40 °C rated value</li> </ul>	60 A
— up to 690 V at ambient temperature 60 °C rated	55 A
value	
• at AC-3	
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
• at AC-3e	
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
• at AC-4 at 400 V rated value	35 A
• at AC-5a up to 690 V rated value	52.8 A
• at AC-5b up to 400 V rated value	33.2 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	36.5 A
— up to 400 V for current peak value n=20 rated value	36.5 A
— up to 500 V for current peak value n=20 rated value	36.5 A
— up to 690 V for current peak value n=20 rated value	24 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	24.2 A
— up to 400 V for current peak value n=30 rated value	24.2 A
— up to 500 V for current peak value n=30 rated value	24.2 A
— up to 690 V for current peak value n=30 rated value	24 A
minimum cross-section in main circuit at maximum AC-1 rated value	16 mm²
operational current for approx. 200000 operating cycles at	
AC-4	00.4
• at 400 V rated value	22 A
at 690 V rated value	18.5 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	23 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
with 2 current paths in series at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
<ul><li>with 3 current paths in series at DC-1</li></ul>	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	45 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
<ul> <li>at 1 current path at DC-3 at DC-5</li> </ul>	

	— at 24 V rated value	35 A
	— at 60 V rated value	6 A
	— at 220 V rated value	1 A
* with 2 current paths in series at DC-3 at DC-5  — at 24 V rated value — at 60 V rated value — at 100 V rated value — at 600 V rated value — at 600 V rated value — at 500 V rated value — at 600	— at 440 V rated value	0.1 A
	— at 600 V rated value	0.06 A
	<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
	— at 24 V rated value	55 A
	— at 60 V rated value	45 A
	— at 110 V rated value	25 A
■ 1800 V rated value   ■ 1800 V rated value   55 A   ■ 12 V rated value   55 A   ■ 14 40 V rated value   0.8 A   ■ 15 K W	— at 220 V rated value	5 A
### ### ### ### ### ### ### ### ### ##	— at 440 V rated value	0.27 A
	— at 600 V rated value	0.16 A
	<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
at 110 V rated value at 220 V rated value at 800 V rated value 800 r	— at 24 V rated value	55 A
at 220 V rated value	— at 60 V rated value	55 A
	— at 110 V rated value	55 A
- at 600 V rated value	— at 220 V rated value	25 A
- at 600 V rated value	— at 440 V rated value	0.6 A
at AC-2 at 400 V rated value		
* at AC-2 at 400 V rated value * at AC-3 - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 690 V rated value - at 690 V rated value - at 690 V rated value * at AC-3e - at 230 V rated value * at AC-3e - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 400 V rated value - at 690 V rated value * at 400 V rated value - at 690 V rated value * at 400 V rated value  * operating power for approx. 200000 operating cycles at AC-4  * at 400 V rated value  * operating apparent power at AC-6a * up to 230 V for current peak value n=20 rated value * up to 690 V for current peak value n=20 rated value * up to 690 V for current peak value n=20 rated value * up to 500 V for current peak value n=20 rated value * up to 500 V for current peak value n=30 rated value * up to 500 V for current peak value n=50 rated value * up to 500 V for current peak value n=50		
		18.5 kW
at 230 V rated value at 400 V rated value at 500 V rated value at 500 V rated value at 680 V rated value at 400 V rated value at 400 V rated value at 690 V roc current peak value n-20 rated value at 690 V for current peak value n-20 rated value at 690 V for current peak value n-20 rated value at 690 V for current peak value n-20 rated value at 690 V for current peak value n-30 rated value at 690 V for current peak value n-30 rated value at 680 V for current peak value n-30 rated value at 680 V for current peak value n-30 rated value at 680 V for current peak value n-30 rated value at 680 V for current peak value n-30 rated value at 680 V for current peak value n-30 rated value at 680 V for current peak value n-30 rated value at 680 V for current peak value n-30 rated value at 680 V for current peak value n-30 rated value at 680 V for current peak value n-30 rated value at 680 V for current peak value n-30 rated value at 680 V for current for at 680 V for cur		
- at 400 V rated value		11 kW
- at 500 V rated value		
■ at AC-3e     — at 230 V rated value     — at 400 V rated value     — at 690 V for current peak value n=20 rated value     — at 690 V for current peak value n=20 rated value     — up to 690 V for current peak value n=20 rated value     — up to 690 V for current peak value n=30 rated value     — up to 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated value     — at 690 V for current peak value n=30 rated valu		
- at 230 V rated value - at 500 V rated value - at 690 V rated value  • at 400 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • 400 K current peak value n=30 rated value • 41 KVA • 42 KVA  **Short-time withstand current in cold operating state up to 40 ° C  • ilmited to 1 s switching at zero current maximum • ilmited to 5 s switching at zero current maximum • ilmited to 60 s switching at zero current maximum • ilmited to 60 s switching at zero current maximum • ilmited to 60 s switching at zero current maximum • ilmited to 60 s switching at zero current maximum • ilmited to 60 s switching at zero current maximum • ilmited to 60 s switching at zero current maximum • ilmited to 60 s switching at zero current maximum • ilmited to 60 s switching at zero current maximum • ilmited to 60 s switching at zero current maximum • ilmited to 60 s switching at zero current maxim		ZZ KVV
- at 400 V rated value - at 500 V rated value 22 kW  operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=30 rated value • to 500 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for		44 144
at 500 V rated value at 690 V rated value at 690 V rated value  operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value • at 690 V rated value • operating apparent power at AC-8a • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 50 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 6		
operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 1 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • li		
operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=30 rated value • up to 200 V for current peak value n=30 rated value • up to 200 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current maximum • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at		
* at 400 V rated value     * at 690 V rated value     * operating apparent power at AC-8a     * up to 230 V for current peak value n=20 rated value     * up to 400 V for current peak value n=20 rated value     * up to 690 V for current peak value n=20 rated value     * up to 690 V for current peak value n=20 rated value     * up to 690 V for current peak value n=20 rated value     * up to 690 V for current peak value n=30 rated value     * up to 230 V for current peak value n=30 rated value     * up to 400 V for current peak value n=30 rated value     * up to 590 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * 40 V C      * limited to 1 s switching at zero current maximum     * limited to 10 s swit		22 KW
at 400 V rated value at 690 V rated value 16.8 kW  operating apparent power at AC-6a  up to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 230 V for current peak value n=20 rated value 28.6 kVA  operating apparent power at AC-6a  up to 230 V for current peak value n=30 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C  limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum elimited to 80 s switching at zero current maximum elimited to 80 s switching at zero current maximum elimited to 80 s switching at zero current maximum elimited to 60 s switching at zero current maximum elimited to 60 s switching at zero current maximum elimited to 60 s switching at zero current maximum 100-ad switching frequency e at AC  operating frequency at AC-2 maximum 1 200 1/h at AC-3 maximum 1 200 1/h at AC-3 maximum 1 200 1/h at AC-3 maximum 1 200 1/h at AC-4 maximum 300 1/h		
e at 690 V rated value  operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 60 s switching at zero cu		11 6 kW
operating apparent power at AC-8a  • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 550 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value  • up to 330 V for current peak value n=30 rated value • up to 300 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 550 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 50 s switching at zero current maximum • limited to 60 s switching at zero current maximum  106 A; Use minimum cross-section acc. to AC-1 rated value  116.8 kVA  21 kVA  28.6 kVA  843 A; Use minimum cross-section acc. to AC-1 rated value  843 A; Use minimum cross-section acc. to AC-1 rated value  107 A; Use minimum cross-section acc. to AC-1 rated value  108 A; Use minimum cross-section acc. to AC-1 rated value  109 A; Use minimum cross-section acc. to AC-1 rated value  109 A; Use minimum cross-section acc. to AC-1 rated value  109 A; Use minimum cross-section acc. to AC-1 rated value  109 A; Use minimum cross-section acc. to AC-1 rated value  109 A; Use minimum cross-section acc. to AC-1 rated value  109 A; Use minimum cross-section acc. to AC-1 rated value  109 A; Use minimum cross-section acc. to AC-1 rated value  109 A; Use minimum cross-section acc. to AC-1 rated value  109 A; Use minimum cross-section acc. to AC		
up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 230 V for current peak value n=30 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current neximum up to 690 V for current neximum up to		
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value 28.6 kVA  operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C  ilmited to 1 s switching at zero current maximum ilmited to 10 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum at AC- operating frequency at AC  at AC- operating frequency  at AC-1 maximum  1 200 1/h  at AC-2 maximum 1 000 1/h  at AC-3 maximum 1 000 1/h  at AC-3 maximum 1 000 1/h  at AC-4 maximum 300 1/h		14.5 kVA
• up to 500 V for current peak value n=20 rated value     • up to 690 V for current peak value n=20 rated value 28.6 kVA  operating apparent power at AC-6a     • up to 230 V for current peak value n=30 rated value     • up to 400 V for current peak value n=30 rated value     • up to 500 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • limited to 1 s switching at zero current maximum     • limited to 5 s switching at zero current maximum     • limited to 1 s switching at zero current maximum     • limited to 3 s switching at zero current maximum     • limited to 60 s switchi		
• up to 690 V for current peak value n=20 rated value     operating apparent power at AC-6a     • up to 230 V for current peak value n=30 rated value     • up to 400 V for current peak value n=30 rated value     • up to 500 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • limited to 1 s switching at zero current maximum     • limited to 5 s switching at zero current maximum     • limited to 10 s switching at zero current maximum     • limited to 30 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to		
operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 80 s switching at zero current maximum  • limited to 80 s switching at zero current maximum  • limited to 80 s switching at zero current maximum  • limited to 80 s switching at zero current maximum  • limited to 80 s switching at zero current maximum  • limited to 80 s switching at zero current maximum  • limited to 80 s switching at zero current maximum  196 A; Use minimum cross-section acc. to AC-1 rated value  no-load switching frequency  • at AC-  5 000 1/h  operating frequency  • at AC-1 maximum  1 200 1/h  • at AC-2 maximum  1 000 1/h  • at AC-3 maximum  1 000 1/h  • at AC-4 maximum  300 1/h		
up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C  limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum sharp to 400 A; Use minimum cross-section acc. to AC-1 rated value limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum sharp to 400 A; Use minimum cross-section acc. to AC-1 rated value limited to 60 s switching at zero current maximum sharp to 400 A; Use minimum cross-section acc. to AC-1 rated value limited to 60 s switching at zero current maximum sharp to 400 A; Use minimum cross-section acc. to AC-1 rated value limited to 60 s switching at zero current maximum sharp to 400 A; Use minimum cross-section acc. to AC-1 rated value limited to 60 s switching frequency at AC-1 maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero cu		20.0 10/7
up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C  limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching		0.6 kV/A
<ul> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>196 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>limited to 60 s switching at zero current maximum</li> <li>196 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>at AC</li> <li>5 000 1/h</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>300 1/h</li> </ul>		
up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C      ilimited to 1 s switching at zero current maximum     ilimited to 5 s switching at zero current maximum     ilimited to 10 s switching at zero current maximum     ilimited to 30 s switching at zero current maximum     ilimited to 30 s switching at zero current maximum     ilimited to 30 s switching at zero current maximum     ilimited to 60 s switching at zero current maximum     ilimited to 60 s switching at zero current maximum      inoload switching frequency     at AC      sound I/h      at AC-2 maximum     at AC-3 maximum     at AC-4 maximum     sound I/h      at AC-4 maximum     sound I/h      at AC-4 maximum     sound I/h      sound I/h      at AC-4 maximum     sound I/h      sound I/m      sound I/m      sound I/m      sound I/m      sound I/m		
short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  196 A; Use minimum cross-section acc. to AC-1 rated value  no-load switching frequency  • at AC  5 000 1/h  operating frequency  • at AC-1 maximum  1 200 1/h  • at AC-3 maximum  1 000 1/h  • at AC-3 maximum  • at AC-4 maximum  1 000 1/h  • at AC-4 maximum  300 1/h		
• limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  196 A; Use minimum cross-section acc. to AC-1 rated value  no-load switching frequency  • at AC  5 000 1/h   operating frequency  • at AC-2 maximum  • at AC-3 maximum  1 000 1/h  • at AC-3 maximum  • at AC-3 maximum  • at AC-4 maximum  300 1/h		20.0 KVA
<ul> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching frequency</li> <li>at AC</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> </ul>		
<ul> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching frequency</li> <li>at AC</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>300 1/h</li> </ul>		843 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>no-load switching frequency</li> <li>at AC</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>300 1/h</li> </ul>	- miniog to 1 9 switching at ACIO cultant maximum	,
<ul> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>no-load switching frequency</li> <li>at AC</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 e maximum</li> <li>at AC-4 maximum</li> <li>300 1/h</li> </ul>	-	596 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 60 s switching at zero current maximum</li> <li>no-load switching frequency</li> <li>at AC</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 e maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>300 1/h</li> </ul>	• limited to 5 s switching at zero current maximum	
no-load switching frequency	<ul> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> </ul>	400 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>at AC</li> <li>5 000 1/h</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>300 1/h</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> </ul>	<ul> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> </ul>	400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value
operating frequency         • at AC-1 maximum       1 200 1/h         • at AC-2 maximum       750 1/h         • at AC-3 maximum       1 000 1/h         • at AC-3e maximum       1 000 1/h         • at AC-4 maximum       300 1/h	<ul> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> </ul>	400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>300 1/h</li> </ul>	Ilimited to 5 s switching at zero current maximum Ilimited to 10 s switching at zero current maximum Ilimited to 30 s switching at zero current maximum Ilimited to 60 s switching at zero current maximum Ino-load switching frequency	400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>300 1/h</li> </ul>	Imited to 5 s switching at zero current maximum Imited to 10 s switching at zero current maximum Imited to 30 s switching at zero current maximum Imited to 60 s switching at zero current maximum Ino-load switching frequency  at AC	400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>300 1/h</li> </ul>	Imited to 5 s switching at zero current maximum Imited to 10 s switching at zero current maximum Imited to 30 s switching at zero current maximum Imited to 60 s switching at zero current maximum Ino-load switching frequency  at AC Operating frequency	400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h
<ul> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>300 1/h</li> </ul>	Imited to 5 s switching at zero current maximum Imited to 10 s switching at zero current maximum Imited to 30 s switching at zero current maximum Imited to 60 s switching at zero current maximum Ino-load switching frequency  at AC  Operating frequency  at AC-1 maximum	400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 1 200 1/h
• at AC-4 maximum 300 1/h	Imited to 5 s switching at zero current maximum Imited to 10 s switching at zero current maximum Imited to 30 s switching at zero current maximum Imited to 60 s switching at zero current maximum Imoload switching frequency  at AC  operating frequency  at AC-1 maximum  at AC-2 maximum	400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 1 200 1/h 750 1/h
	Imited to 5 s switching at zero current maximum Imited to 10 s switching at zero current maximum Imited to 30 s switching at zero current maximum Imited to 60 s switching at zero current maximum Imoload switching frequency Implication at AC Imaximum Implication at AC-1 maximum Implication at AC-2 maximum Implication at AC-3 maximum Imp	400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value  5 000 1/h  1 200 1/h 750 1/h 1 000 1/h
Control circuit/ Control	Imited to 5 s switching at zero current maximum Imited to 10 s switching at zero current maximum Imited to 30 s switching at zero current maximum Imited to 60 s switching at zero current maximum Imoload switching frequency  at AC  Operating frequency  at AC-1 maximum  at AC-2 maximum  at AC-3 maximum  at AC-3 maximum  at AC-3 maximum	400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value  5 000 1/h  1 200 1/h 750 1/h 1 000 1/h 1 000 1/h
	Imited to 5 s switching at zero current maximum Imited to 10 s switching at zero current maximum Imited to 30 s switching at zero current maximum Imited to 60 s switching at zero current maximum Imoload switching frequency  at AC  Operating frequency  at AC-1 maximum  at AC-2 maximum  at AC-3 maximum  at AC-3 maximum  at AC-4 maximum  at AC-4 maximum	400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value  5 000 1/h  1 200 1/h 750 1/h 1 000 1/h 1 000 1/h

type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	42 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	0.0 1.1
• at 50 Hz	190 VA
inductive power factor with closing power of the coil	100 VA
• at 50 Hz	0.72
apparent holding power of magnet coil at AC	0.12
• at 50 Hz	16 VA
inductive power factor with the holding power of the coil	10 071
• at 50 Hz	0.37
closing delay	
• at AC	10 80 ms
opening delay	
• at AC	10 18 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous	2
contact	
number of NO contacts for auxiliary contacts instantaneous contact	2
operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
at 690 V rated value	1 A
operational current at DC-12	
• at 24 V rated value	10 A
• at 48 V rated value	6 A
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
at 220 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	
• at 24 V rated value	6 A
at 48 V rated value	2 A
at 60 V rated value	2 A
at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	40.4
• at 480 V rated value	40 A
at 600 V rated value  Violded mackaging performance [hp]	41 A
yielded mechanical performance [hp]	
• for single-phase AC motor	2 hn
— at 110/120 V rated value	3 hp
— at 230 V rated value	7.5 hp
• for 3-phase AC motor	10 hp
— at 200/208 V rated value	10 hp
— at 220/230 V rated value	15 hp
— at 460/480 V rated value	30 hp
<ul> <li>— at 575/600 V rated value</li> </ul>	40 hp

contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
• for short-circuit protection of the main circuit	
— with type of coordination 1 required	gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)
<ul> <li>— with type of assignment 2 required</li> </ul>	gG: 80A (690V,100kA), aM: 50A (690V,100kA), BS88: 63A (415V,80kA)
• for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	114 mm
width	55 mm
depth	174 mm
required spacing	
<ul> <li>with side-by-side mounting</li> </ul>	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
for grounded parts	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	· min
type of electrical connection	
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
at contactor for auxiliary contacts	Screw-type terminals
of magnet coil	Screw-type terminals Screw-type terminals
	Sciew-type terminals
type of connectable conductor cross-sections for main contacts	2v /1 25 mm²\ 1v /1 50 mm²\
solid or stranded     finely stranded with core and processing	2x (1 35 mm²), 1x (1 50 mm²)
finely stranded with core end processing  connectable conductor cross section for main contacts.	2x (1 25 mm²), 1x (1 35 mm²)
connectable conductor cross-section for main contacts	1 25 mm <sup>2</sup>
finely stranded with core end processing  connectable conductor cross section for auxiliary contacts.	1 35 mm²
connectable conductor cross-section for auxiliary contacts	0.5 2.5 mm²
solid or stranded     finely stranded with core and processing.	0.5 2.5 mm <sup>2</sup>
finely stranded with core end processing	U.5 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary contacts	0, (0 5 4 5 2222) 0, (0 75 0 5 2222)
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
for AWG cables for auxiliary contacts	2x (20 16), 2x (18 14)
AWG number as coded connectable conductor cross section	40 4
• for main contacts	18 1
for auxiliary contacts	20 14
Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No
	Voc
suitability for use safety-related switching OFF	Yes

proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Certificates/ approvals

### **General Product Approval**



Confirmation





<u>KC</u>



Functional
Safety/Safety of Machinery

**Declaration of Conformity** 

**Test Certificates** 



Type Examination Certificate





Type Test Certificates/Test Report

Special Test Certificate

## Marine / Shipping













Marine / Shipping other Railway Dangerous Good Environment



Confirmation

Confirmation

Vibration and Shock

Transport Information

Environmental Confirmations

### Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2035-1AD04

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RT2035-1AD04}$ 

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 

https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-1AD04

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2035-1AD04&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-1AD04/chai


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2035-1AD04&objecttype=14&gridview=view1



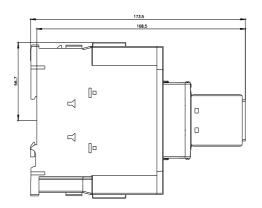



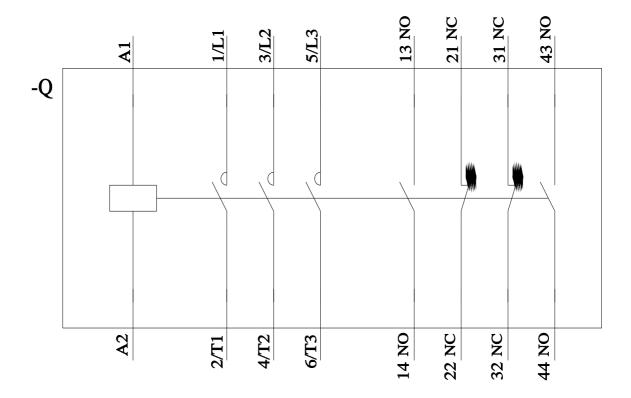

last modified:

8/15/2023



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20351AD04