SIEMENS

Data sheet

3RT2035-1AN24



power contactor, AC-3e/AC-3, 41 A, 18.5 kW / 400 V, 3-pole, 220 V AC, 50/60 Hz, auxiliary contacts: 2 NO + 2 NC, screw terminal, size: S2, removable auxiliary switch

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
 function module for communication 	No
auxiliary switch	No
power loss [W] for rated value of the current	
 at AC in hot operating state 	6.6 W
 at AC in hot operating state per pole 	2.2 W
 without load current share typical 	6.5 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	9.8g / 5 ms, 6.5g / 10 ms
shock resistance with sine pulse	
● at AC	15.3g / 5 ms, 10.1g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
	3
 operating voltage at AC-3 rated value maximum 	690 V
at AC-3 rated value maximum at AC-3e rated value maximum	690 V
operational current	
at AC-1 at 400 V at ambient temperature 40 °C rated	60 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated	60 A
value	
— up to 690 V at ambient temperature 60 °C rated value	55 A
• at AC-3	
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
• at AC-3e	
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
at AC-4 at 400 V rated value	35 A
• at AC-5a up to 690 V rated value	52.8 A
• at AC-5b up to 400 V rated value	33.2 A
● at AC-6a	
— up to 230 V for current peak value n=20 rated value	36.5 A
— up to 400 V for current peak value n=20 rated value	36.5 A
— up to 500 V for current peak value n=20 rated value	36.5 A
— up to 690 V for current peak value n=20 rated value	24 A
● at AC-6a	
 — up to 230 V for current peak value n=30 rated value 	24.2 A
 — up to 400 V for current peak value n=30 rated value 	24.2 A
 — up to 500 V for current peak value n=30 rated value 	24.2 A
 — up to 690 V for current peak value n=30 rated value 	24 A
minimum cross-section in main circuit at maximum AC-1 rated value	16 mm ²
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	22 A
• at 690 V rated value	18.5 A
operational current	
 at 1 current path at DC-1 	
— at 24 V rated value	55 A
— at 60 V rated value	23 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
• with 2 current paths in series at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
with 3 current paths in series at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
- at 110 V rated value	55 A
- at 220 V rated value	45 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
 at 1 current path at DC-3 at DC-5 	


— at 24 V rated value	35 A				
— at 60 V rated value	6 A				
— at 220 V rated value	1 A				
— at 440 V rated value	0.1 A				
— at 600 V rated value	0.06 A				
 with 2 current paths in series at DC-3 at DC-5 					
— at 24 V rated value	55 A				
— at 60 V rated value	45 A				
— at 110 V rated value	25 A				
— at 220 V rated value	5 A				
— at 440 V rated value	0.27 A				
— at 600 V rated value	0.16 A				
 with 3 current paths in series at DC-3 at DC-5 					
— at 24 V rated value	55 A				
— at 60 V rated value	55 A				
— at 110 V rated value	55 A				
— at 220 V rated value	25 A				
— at 440 V rated value	0.6 A				
— at 600 V rated value	0.35 A				
operating power					
• at AC-2 at 400 V rated value	18.5 kW				
• at AC-3					
— at 230 V rated value	11 kW				
— at 400 V rated value	18.5 kW				
— at 500 V rated value	22 kW				
— at 690 V rated value	22 kW				
• at AC-3e					
— at 230 V rated value	11 kW				
— at 400 V rated value	18.5 kW				
— at 500 V rated value	22 kW				
— at 690 V rated value	22 kW				
operating power for approx. 200000 operating cycles at AC-	ZZ KVV				
4					
 at 400 V rated value 	11.6 kW				
 at 690 V rated value 	16.8 kW				
operating apparent power at AC-6a					
 operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value 	14.5 kVA				
• up to 230 V for current peak value n=20 rated value	14.5 kVA 25.2 kVA				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value 					
• up to 230 V for current peak value n=20 rated value	25.2 kVA				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value 	25.2 kVA 31.6 kVA				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value 	25.2 kVA 31.6 kVA				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value Operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current in cold operating state up to 40 °C 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for switching at zero current maximum limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value n=30 rated value up to 690 V for current p	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum no-load switching frequency at AC operating frequency 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value the 690 V for current peak value n=30 rated value a AC operating frequency at AC-1 maximum at AC-2 maximum 	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 1 200 1/h				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC operating frequency at AC	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 1 200 1/h				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC-1 maximum at AC-3 maximum <li< td=""><td>25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 1 200 1/h 1 000 1/h 1 000 1/h</td></li<>	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 1 200 1/h 1 000 1/h 1 000 1/h				
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC operating frequency at AC	25.2 kVA 31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 100 1/h				


type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	220 V
• at 60 Hz rated value	220 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	210 VA
• at 60 Hz	188 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.69
• at 60 Hz	0.65
apparent holding power of magnet coil at AC	
• at 50 Hz	17.2 VA
• at 60 Hz	16.5 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.36
• at 60 Hz	0.39
closing delay	
• at AC	10 80 ms
opening delay	
• at AC	10 18 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous	2
contact number of NO contacts for auxiliary contacts instantaneous	2
contact	
operational current at AC-12 maximum	10 A
operational current at AC-15	A
at 230 V rated value	6 A
at 400 V rated value	3 A
at 500 V rated value	2 A
at 690 V rated value	1 A
operational current at DC-12	40.4
• at 24 V rated value	10 A
 at 48 V rated value 	
- at CO V rated value	6 A
at 60 V rated value	6 A
• at 110 V rated value	6 A 3 A
at 110 V rated valueat 125 V rated value	6 A 3 A 2 A
 at 110 V rated value at 125 V rated value at 220 V rated value 	6 A 3 A 2 A 1 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value 	6 A 3 A 2 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13	6 A 3 A 2 A 1 A 0.15 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value Operational current at DC-13 at 24 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 60 V rated value at 10 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 1 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 110 V rated value at 125 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 1 A 0.9 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 10 V rated value at 125 V rated value at 220 V rated value at 220 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 1 A 0.9 A 0.3 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 600 V rated value at 600 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 1 A 0.9 A 0.3 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 600 V rated value at 600 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 220 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 220 V rated value at 600 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value at 480 V rated value at 480 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 40 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value at 480 V rated value at 480 V rated value at 480 V rated value at 600 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 40 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 220 V rated value at 600 V rated value at 480 V rated value at 480 V rated value at 480 V rated value at 600 V rated value at 600 V rated value 	6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 40 A

— at 230 V rated value	7.5 hp			
• for 3-phase AC motor				
— at 200/208 V rated value	10 hp			
— at 220/230 V rated value	15 hp			
— at 460/480 V rated value	30 hp			
at 575/600 V rated value	40 hp			
contact rating of auxiliary contacts according to UL	A600 / Q600			
Short-circuit protection				
design of the fuse link				
 for short-circuit protection of the main circuit 				
 — with type of coordination 1 required 	gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)			
 — with type of assignment 2 required 	gG: 80A (690V,100kA), aM: 50A (690V,100kA), BS88: 63A (415V,80kA)			
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)			
Installation/ mounting/ dimensions				
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface			
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715			
side-by-side mounting	Yes			
height	114 mm			
width	55 mm			
depth	174 mm			
required spacing				
with side-by-side mounting				
— forwards	10 mm			
— upwards	10 mm			
— downwards	10 mm			
— at the side	0 mm			
for grounded parts				
— forwards	10 mm			
— upwards	10 mm			
— at the side	10 mm 6 mm			
— downwards	10 mm			
for live parts	10 11111			
forwards	10 mm			
— upwards	10 mm			
— downwards	10 mm			
— at the side	6 mm			
Connections/ Terminals				
type of electrical connection				
for main current circuit	screw-type terminals			
 for auxiliary and control circuit 	screw-type terminals			
 at contactor for auxiliary contacts 	Screw-type terminals			
of magnet coil	Screw-type terminals			
type of connectable conductor cross-sections for main contacts				
 solid or stranded 	2x (1 35 mm²), 1x (1 50 mm²)			
 finely stranded with core end processing 	2x (1 25 mm²), 1x (1 35 mm²)			
connectable conductor cross-section for main contacts				
 finely stranded with core end processing 	1 35 mm²			
connectable conductor cross-section for auxiliary contacts				
solid or stranded	0.5 2.5 mm²			
 finely stranded with core end processing 	0.5 2.5 mm²			
type of connectable conductor cross-sections				
 for auxiliary contacts 				
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)			
— finely stranded with core end processing	2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)			
for AWG cables for auxiliary contacts	2x (20 16), 2x (18 14)			
AWG number as coded connectable conductor cross section				
for main contacts	18 1			
for auxiliary contacts	20 14			

afety related data						
product function						
 mirror contact a 	according to IEC 60947-4-1	Yes				
 positively driver 	positively driven operation according to IEC 60947-5-1 No					
suitability for use safety-related switching OFF						
B10 value with high demand rate according to SN 31920		1 31920 1 00	000 000			
proportion of dangerous failures						
 with low demand rate according to SN 31920 		20 40 9	%			
 with high dema 	• with high demand rate according to SN 31920		%			
failure rate [FIT] with I	ailure rate [FIT] with low demand rate according to SN 31920		FIT			
T1 value for proof test interval or service life according to IEC		rding to IEC 20 a	20 a			
61508						
protection class IP on the front according to IEC 60529						
touch protection on the front according to IEC 60529			finger-safe, for vertical contact from the front			
Certificates/ approvals						
General Product Ap	proval					
	Confirmation		-	KC		
(CD	Committation	(m)	<u>m</u>	<u>NO</u>	гпг	
S.		<u>u</u>	U		r m i	
CSA		ccc	UL			
EMC	Functional	Declaration of Conf.	armitu	Test Certificates		
EMC	Safety/Safety of Ma- chinery	Declaration of Confe	ormity	Test Certificates		
Δ	Type Examination Cer-		~ ~	Special Test Certific-	Type Test Certific-	
le la companya de la comp	tificate	UK		ate	ates/Test Report	
Ś						
Marine / Shipping		ĴÅ	Lloyds	6		
1.350		DNV	Kegister			
ABS	BUREAU	DNV	LRS	PRS	RINA	
	VERITAS					
Marine / Shipping	other		Railway	Dangerous Good	Environment	
-	Confirmation	Confirmation	Vibration and Shock	Transport Information	Environmental Con-	
	Commation	Commation	VIDIATION AND SHOCK		firmations	
RMRS						
urther information						
	d to exit the Russian marl		- i hu-t			
	.com/global/en/pressrelease		<u>ssian-business</u>			
	on the renewal of the curr ocal Siemens office on the s		AC certification if you inten	d to import or offer to supr	bly these products to an	
EAC relevant market	(other than the sanctioned E				•	
Information on the p	oackaging Ty.siemens.com/cs/ww/en/vi	ow/100912975				
	wnloadcenter (Catalogs, E					
https://www.siemens.c						
Industry Mall (Online						
https://mall.industry.si Cax online generato	iemens.com/mall/en/en/Cata	alog/product?mlfb=3RT2	<u>2035-1AN24</u>			
	r tion.siemens.com/WW/CAX	order/default.aspx?lang	<u>=en&mlfb=3RT2035-1A</u> N2	<u>4</u>		
Service&Support (M	anuals, Certificates, Char	acteristics, FAQs,)				
the second se	y.siemens.com/cs/ww/en/p					
	oduct images, 2D dimension n.siemens.com/bilddb/cax of			s, EPLAN Macros,)		
Characteristic: Tripp	oing characteristics, I ² t, Le	t-through current				
	y.siemens.com/cs/ww/en/p					
Further characteristi	ics (e.g. electrical endurar	ice, switching frequen	суј			

 $\underline{http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2035-1AN24\&objecttype=14\&gridview=view1$

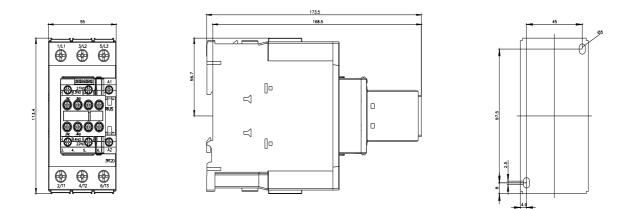

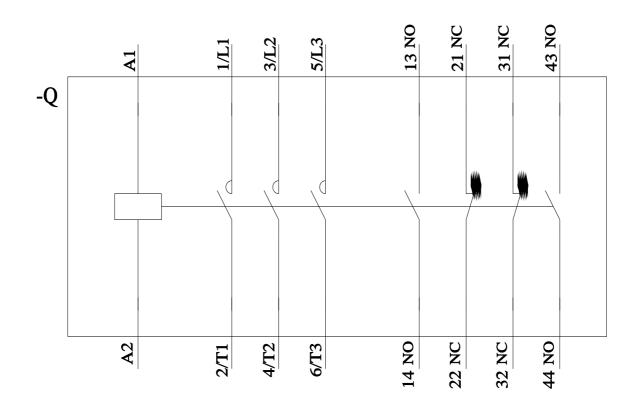

last modified:

8/15/2023 🖸

3RT20351AN24 Page 7/8

8/17/2023

Subject to change without notice © Copyright Siemens

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RT20351AN24