## SIEMENS

## Data sheet

## 3RT2035-1CP04



power contactor, AC-3e/AC-3, 41 A, 18.5 kW / 400 V, 3-pole, 230 V AC, 50 Hz, with plugged-in varistor, auxiliary contacts: 2 NO + 2 NC, screw terminal, size: S2, removable auxiliary switch

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
<ul> <li>function module for communication</li> </ul>	No
<ul> <li>auxiliary switch</li> </ul>	No
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	6.6 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.2 W
<ul> <li>without load current share typical</li> </ul>	6 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
<ul> <li>of auxiliary circuit rated value</li> </ul>	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	9.8g / 5 ms, 6.5g / 10 ms
shock resistance with sine pulse	
• at AC	15.3g / 5 ms, 10.1g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of contactor typical</li> </ul>	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
SVHC substance name	Blei - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	


number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	
at AC-1 at 400 V at ambient temperature 40 °C rated	60 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated	60 A
value	
— up to 690 V at ambient temperature 60 °C rated value	55 A
• at AC-3	
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
• at AC-3e	
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
• at AC-4 at 400 V rated value	35 A
at AC-5a up to 690 V rated value	52.8 A
• at AC-5b up to 400 V rated value	33.2 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	36.5 A
— up to 400 V for current peak value n=20 rated value	36.5 A
— up to 500 V for current peak value n=20 rated value	36.5 A
— up to 690 V for current peak value n=20 rated value	24 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	24.2 A
— up to 400 V for current peak value n=30 rated value	24.2 A
— up to 500 V for current peak value n=30 rated value	24.2 A
— up to 690 V for current peak value n=30 rated value	24 A
minimum cross-section in main circuit at maximum AC-1 rated	16 mm <sup>2</sup>
value operational current for approx. 200000 operating cycles at AC-4	
at 400 V rated value	22 A
at 690 V rated value	18.5 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	23 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
<ul> <li>with 2 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
<ul> <li>with 3 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	45 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A


• at 1 current path at DC-3 at DC-5					
— at 24 V rated value	35 A				
— at 60 V rated value	6 A				
— at 220 V rated value	1A				
— at 440 V rated value	0.1 A				
— at 600 V rated value	0.06 A				
• with 2 current paths in series at DC-3 at DC-5					
— at 24 V rated value	55 A				
— at 60 V rated value	45 A				
— at 110 V rated value	25 A				
— at 220 V rated value	5 A				
— at 440 V rated value	0.27 A				
— at 600 V rated value	0.16 A				
• with 3 current paths in series at DC-3 at DC-5					
— at 24 V rated value	55 A				
— at 60 V rated value	55 A				
— at 110 V rated value	55 A				
— at 220 V rated value	25 A				
— at 440 V rated value	0.6 A				
— at 600 V rated value	0.35 A				
operating power					
• at AC-2 at 400 V rated value	18.5 kW				
• at AC-3					
— at 230 V rated value	11 kW				
— at 400 V rated value	18.5 kW				
— at 500 V rated value	22 kW				
— at 690 V rated value	22 kW				
• at AC-3e					
— at 230 V rated value	11 kW				
— at 400 V rated value	18.5 kW				
— at 500 V rated value	22 kW				
— at 690 V rated value	22 KW				
operating power for approx. 200000 operating cycles at AC- 4					
at 400 V rated value	11.6 kW				
at 400 V rated value     at 690 V rated value	16.8 kW				
operating apparent power at AC-6a	10.0 KVV				
up to 230 V for current peak value n=20 rated value	14.5 kVA				
• up to 400 V for current peak value n=20 rated value					
	25.2 kVA				
• up to 500 V for current peak value n=20 rated value	31.6 kVA				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> </ul>					
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> </ul>	31.6 kVA 28.6 kVA				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>to 500 V for current peak value n=30 rated value</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>at AC</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>at AC</li> <li>operating frequency</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>at AC</li> <li>operating frequency</li> <li>at AC-1 maximum</li> </ul>	31.6 kVA 28.6 kVA 9.6 kVA 16.8 kVA 21 kVA 28.6 kVA 843 A; Use minimum cross-section acc. to AC-1 rated value 596 A; Use minimum cross-section acc. to AC-1 rated value 400 A; Use minimum cross-section acc. to AC-1 rated value 241 A; Use minimum cross-section acc. to AC-1 rated value 196 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 1 200 1/h				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>at AC</li> <li>operating frequency</li> <li>at AC-1 maximum</li> </ul>	31.6 kVA         28.6 kVA         9.6 kVA         16.8 kVA         21 kVA         28.6 kVA         843 A; Use minimum cross-section acc. to AC-1 rated value         506 A; Use minimum cross-section acc. to AC-1 rated value         400 A; Use minimum cross-section acc. to AC-1 rated value         241 A; Use minimum cross-section acc. to AC-1 rated value         196 A; Use minimum cross-section acc. to AC-1 rated value         241 A; Use minimum cross-section acc. to AC-1 rated value         196 A; Use minimum cross-section acc. to AC-1 rated value         5 000 1/h         1 200 1/h         750 1/h				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>at AC-1 maximum</li> <li>at AC-3 maximum</li> </ul>	31.6 kVA         28.6 kVA         9.6 kVA         16.8 kVA         21 kVA         28.6 kVA         843 A; Use minimum cross-section acc. to AC-1 rated value         506 A; Use minimum cross-section acc. to AC-1 rated value         400 A; Use minimum cross-section acc. to AC-1 rated value         241 A; Use minimum cross-section acc. to AC-1 rated value         196 A; Use minimum cross-section acc. to AC-1 rated value         196 A; Use minimum cross-section acc. to AC-1 rated value         5 000 1/h         1 200 1/h         750 1/h         1 000 1/h				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>at AC</li> <li>operating frequency</li> <li>at AC-1 maximum</li> </ul>	31.6 kVA         28.6 kVA         9.6 kVA         16.8 kVA         21 kVA         28.6 kVA         843 A; Use minimum cross-section acc. to AC-1 rated value         506 A; Use minimum cross-section acc. to AC-1 rated value         400 A; Use minimum cross-section acc. to AC-1 rated value         241 A; Use minimum cross-section acc. to AC-1 rated value         196 A; Use minimum cross-section acc. to AC-1 rated value         196 A; Use minimum cross-section acc. to AC-1 rated value         5 000 1/h         1 200 1/h         750 1/h				

Control circuit/ Control				
	AC			
type of voltage of the control supply voltage	AU			
control supply voltage at AC	200.1/			
at 50 Hz rated value	230 V			
operating range factor control supply voltage rated value of magnet coil at AC				
• at 50 Hz	0.8 1.1			
design of the surge suppressor	with varistor			
apparent pick-up power of magnet coil at AC				
• at 50 Hz	190 VA			
inductive power factor with closing power of the coil	0.70			
• at 50 Hz	0.72			
apparent holding power of magnet coil at AC	101/1			
• at 50 Hz	16 VA			
inductive power factor with the holding power of the coil	0.27			
• at 50 Hz	0.37			
closing delay	10 - 90 ma			
• at AC	10 80 ms			
opening delay	10 18 ms			
• at AC				
arcing time	10 20 ms			
control version of the switch operating mechanism	Standard A1 - A2			
Auxiliary circuit	2			
number of NC contacts for auxiliary contacts instantaneous contact	2			
number of NO contacts for auxiliary contacts instantaneous contact	2			
operational current at AC-12 maximum	10 A			
operational current at AC-15				
• at 230 V rated value	6 A			
• at 400 V rated value	3 A			
• at 500 V rated value	2 A			
• at 690 V rated value	1 A			
operational current at DC-12				
at 24 V rated value	10 A			
• at 48 V rated value	6 A			
• at 60 V rated value	6 A			
• at 110 V rated value	3 A			
• at 125 V rated value	2 A			
• at 220 V rated value	1 A			
• at 600 V rated value	0.15 A			
operational current at DC-13				
• at 24 V rated value	6 A			
• at 48 V rated value	2 A			
• at 60 V rated value	2 A			
• at 110 V rated value	1 A			
• at 125 V rated value	0.9 A			
• at 220 V rated value	0.3 A			
• at 600 V rated value	0.1 A			
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)			
UL/CSA ratings				
full-load current (FLA) for 3-phase AC motor				
• at 480 V rated value	40 A			
• at 600 V rated value	41 A			
yielded mechanical performance [hp]				
<ul> <li>for single-phase AC motor</li> </ul>				
— at 110/120 V rated value	3 hp			
— at 230 V rated value	7.5 hp			
• for 3-phase AC motor				
— at 200/208 V rated value	10 hp			
— at 220/230 V rated value	15 hp			

at 460/400 V/ rated value	20 hz		
- at 460/480 V rated value	30 hp		
- at 575/600 V rated value	40 hp		
contact rating of auxiliary contacts according to UL	A600 / Q600		
Short-circuit protection			
design of the fuse link			
<ul> <li>for short-circuit protection of the main circuit</li> <li>— with type of coordination 1 required</li> </ul>	gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80		
	(413 V, 60 KA), ANI CO A (650 V, 100 KA), B366. 125 A (413 V, 60 KA)		
- with type of assignment 2 required	gG: 80A (690V,100kA), aM: 50A (690V,100kA), BS88: 63A (415V,80kA)		
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 10 A (500 V, 1 kA)		
Installation/ mounting/ dimensions			
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and		
	backward by +/- 22.5° on vertical mounting surface		
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715		
side-by-side mounting	Yes		
height	114 mm		
width	55 mm		
depth	174 mm		
required spacing			
with side-by-side mounting			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	0 mm		
<ul> <li>for grounded parts</li> </ul>			
— forwards	10 mm		
— upwards	10 mm		
— at the side	6 mm		
— downwards	10 mm		
• for live parts			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	6 mm		
Connections/ Terminals			
type of electrical connection			
<ul> <li>for main current circuit</li> </ul>	screw-type terminals		
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals		
<ul> <li>at contactor for auxiliary contacts</li> </ul>	Screw-type terminals		
of magnet coil	Screw-type terminals		
type of connectable conductor cross-sections for main contacts			
solid or stranded	2x (1 35 mm <sup>2</sup> ), 1x (1 50 mm <sup>2</sup> )		
finely stranded with core end processing	2x (1 25 mm²), 1x (1 35 mm²)		
connectable conductor cross-section for main contacts			
finely stranded with core end processing	1 35 mm²		
connectable conductor cross-section for auxiliary contacts	0.5 0.5 mm²		
solid or stranded	0.5 2.5 mm <sup>2</sup>		
finely stranded with core end processing	0.5 2.5 mm²		
type of connectable conductor cross-sections			
for auxiliary contacts			
— solid or stranded	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )		
— finely stranded with core end processing	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )		
for AWG cables for auxiliary contacts	2x (20 16), 2x (18 14)		
AWG number as coded connectable conductor cross section			
for main contacts	18 1		
for auxiliary contacts	20 14		
Safety related data			
product function			
mirror contact according to IEC 60947-4-1	Yes		
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No		

suitability for use sofet		Yes				
	y-related switching OFF mand rate according to SN		1 000 000			
B10 value with high demand rate according to SN 31920 proportion of dangerous failures		101020 100	0000			
		20 40.0	10			
with low demand rate according to SN 31920     with high demand rate according to SN 31920			40 %			
with high demand rate according to SN 31920						
failure rate [FIT] with low demand rate according to SN 31920			100 FIT			
T1 value for proof test interval or service life according to IEC 61508		<u> </u>	20 a			
-	n the front according to I					
•	he front according to IEC	60529 fing	er-safe, for vertical contact	from the front		
ertificates/ approvals						
General Product App	roval					
SP M		<u>Confirmation</u>	<b>U</b>	KC	EHC	
EMC	Functional Safety/Safety of Ma- chinery	Declaration of Confo	ormity	Test Certificates		
RCM	<u>Type Examination Cer-</u> <u>tificate</u>	UK CA	EG-Konf.	Type Test Certific- ates/Test Report	Special Test Certific- ate	
Marine / Shipping						
ABS	B UREAU VERITAS		Lloyds Register urs	PRS	RINA	
Marine / Shipping	other		Railway	Dangerous Good		
KMRS RMRS	<u>Confirmation</u>	<u>Confirmation</u>	Vibration and Shock	Transport Information		
urther information						
	to exit the Russian mark		anion huningsa			
Siemens is working of Please contact your loo	on the renewal of the curr cal Siemens office on the s other than the sanctioned E	ent EAC certificates. tatus of validity of the E/	AC certification if you intend	d to import or offer to supp	ly these products to an	
https://support.industry Information- and Dow	.siemens.com/cs/ww/en/vi nloadcenter (Catalogs, E					
https://www.siemens.co Industry Mall (Online	ordering system)	log/product0mlft_0DT0				
Cax online generator			<u>:035-1CP04</u> =en&mlfb=3RT2035-1CP04	1		
Service&Support (Ma	nuals, Certificates, Chara siemens.com/cs/ww/en/ps	acteristics, FAQs,)	Chamme-SIX12030-10P04	<u>1</u>		
Image database (proc		on drawings, 3D model	s, device circuit diagram 1CP04⟨=en	s, EPLAN macros,)		
Characteristic: Trippi	ng characteristics, I <sup>2</sup> t, Le	t-through current				
Further characteristic	cs (e.g. electrical endurar siemens.com/bilddb/index	ice, switching frequen	cy)	thupped 1.1.9 gridulous vious 1		

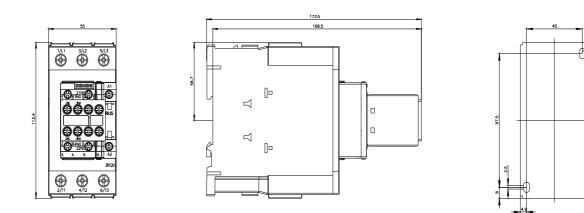

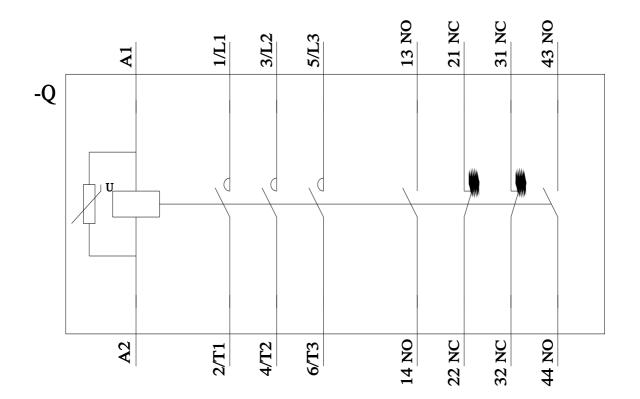

last modified:

8/15/2023 🖸

8/17/2023

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RT20351CP04