SIEMENS

Data sheet 3RT2035-3AG60



power contactor, AC-3e/AC-3, 41 A, 18.5 kW / 400 V, 3-pole, 100 V AC, 50 Hz / 100-110 V, 60 Hz, auxiliary contacts: 1 NO + 1 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S2,

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	6.6 W
 at AC in hot operating state per pole 	2.2 W
without load current share typical	6.5 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	11.8g / 5 ms, 7.4g / 10 ms
shock resistance with sine pulse	
• at AC	18.5g / 5 ms, 11.6g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
 at AC-3 rated value maximum 	690 V
at AC-3e rated value maximum	690 V
operational current	
 at AC-1 at 400 V at ambient temperature 40 °C rated 	60 A
value	
• at AC-1	
 up to 690 V at ambient temperature 40 °C rated value 	60 A
— up to 690 V at ambient temperature 60 °C rated	55 A
value	
• at AC-3	
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
• at AC-3e	
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
• at AC-4 at 400 V rated value	35 A
• at AC-5a up to 690 V rated value	52.8 A
• at AC-5b up to 400 V rated value	33.2 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	36.5 A
— up to 400 V for current peak value n=20 rated value	36.5 A
— up to 500 V for current peak value n=20 rated value	36.5 A
— up to 690 V for current peak value n=20 rated value	24 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	24.2 A
— up to 400 V for current peak value n=30 rated value	24.2 A
— up to 500 V for current peak value n=30 rated value	24.2 A
— up to 690 V for current peak value n=30 rated value	24 A
minimum cross-section in main circuit at maximum AC-1 rated value	16 mm²
operational current for approx. 200000 operating cycles at	
AC-4	
• at 400 V rated value	22 A
at 690 V rated value	18.5 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	23 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
• with 3 current paths in series at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	45 A
— at 440 V rated value	2.9 A
	1.4 A
— at 600 V rated value	1.171

— at 24 V rated value	35 A
— at 60 V rated value	6 A
— at 220 V rated value	1 A
— at 440 V rated value	0.1 A
— at 600 V rated value	0.06 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	25 A
— at 220 V rated value	5 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	25 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.35 A
operating power	
• at AC-2 at 400 V rated value	18.5 kW
• at AC-3	
— at 230 V rated value	11 kW
— at 400 V rated value	18.5 kW
— at 500 V rated value	22 kW
— at 690 V rated value	22 kW
• at AC-3e	
— at 230 V rated value	11 kW
— at 400 V rated value	18.5 kW
— at 500 V rated value	22 kW
— at 690 V rated value	22 kW
operating power for approx. 200000 operating cycles at AC-	
4	
 at 400 V rated value 	11.6 kW
at 690 V rated value	16.8 kW
operating apparent power at AC-6a	
 up to 230 V for current peak value n=20 rated value 	14.5 kVA
 up to 400 V for current peak value n=20 rated value 	25.2 kVA
 up to 500 V for current peak value n=20 rated value 	31.6 kVA
up to 690 V for current peak value n=20 rated value	28.6 kVA
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	9.6 kVA
 up to 400 V for current peak value n=30 rated value 	16.8 kVA
• up to 500 V for current peak value n=30 rated value	21 kVA
• up to 690 V for current peak value n=30 rated value	28.6 kVA
short-time withstand current in cold operating state up to	
40 °C	942 At Line minimum group section and to AC 4 rated value
Ilimited to 1 s switching at zero current maximum	843 A; Use minimum cross-section acc. to AC-1 rated value
Ilimited to 5 s switching at zero current maximum	596 A; Use minimum cross-section acc. to AC-1 rated value
Ilimited to 10 s switching at zero current maximum	400 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 30 s switching at zero current maximum	241 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 60 s switching at zero current maximum	196 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	5 000 4/b
• at AC	5 000 1/h
operating frequency	4 200 4/b
• at AC-1 maximum	1 200 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	1 000 1/h
• at AC-3e maximum	1 000 1/h
• at AC-4 maximum	300 1/h
Control circuit/ Control	

	**
type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	100 V
at 60 Hz rated value	100 110 V
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 1.1
• at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	212 VA
• at 60 Hz	188 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.69
• at 60 Hz	0.65
apparent holding power	
• at minimum rated control supply voltage at AC	
— at 60 Hz	17.2 VA
at maximum rated control supply voltage at AC	
— at 60 Hz	17.2 VA
apparent holding power of magnet coil at AC	
• at 50 Hz	18.5 VA
• at 60 Hz	16.5 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.36
• at 60 Hz	0.39
closing delay	
• at AC	10 80 ms
opening delay	40 40
• at AC	10 18 ms
• at AC arcing time	10 20 ms
at AC arcing time control version of the switch operating mechanism	
at AC arcing time control version of the switch operating mechanism Auxiliary circuit	10 20 ms Standard A1 - A2
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact	10 20 ms Standard A1 - A2
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact	10 20 ms Standard A1 - A2 1
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum	10 20 ms Standard A1 - A2
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15	10 20 ms Standard A1 - A2 1 1 10 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15	10 20 ms Standard A1 - A2 1 1 10 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15	10 20 ms Standard A1 - A2 1 1 1 10 A 10 A 3 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value	10 20 ms Standard A1 - A2 1 1 1 10 A 10 A 3 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A 1 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A 1 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 48 V rated value	10 20 ms Standard A1 - A2 1 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value at 24 V rated value at 48 V rated value at 48 V rated value at 60 V rated value	10 20 ms Standard A1 - A2 1 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value at 48 V rated value at 48 V rated value at 48 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 110 V rated value	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value at 48 V rated value at 48 V rated value at 48 V rated value at 60 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 125 V rated value	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 690 V rated value at 690 V rated value at 690 V rated value at 48 V rated value at 48 V rated value at 48 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value at 48 V rated value at 48 V rated value at 48 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A
■ at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 ■ at 230 V rated value ■ at 400 V rated value ■ at 690 V rated value ■ at 690 V rated value ■ at 24 V rated value ■ at 48 V rated value ■ at 48 V rated value ■ at 110 V rated value ■ at 110 V rated value ■ at 125 V rated value ■ at 220 V rated value ■ at 220 V rated value ■ at 600 V rated value	10 20 ms Standard A1 - A2 1 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value at 48 V rated value at 48 V rated value at 48 V rated value at 110 V rated value at 125 V rated value at 125 V rated value at 200 V rated value at 600 V rated value at 600 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 24 V rated value	10 20 ms Standard A1 - A2 1 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value at 220 V rated value at 220 V rated value at 600 V rated value	10 20 ms Standard A1 - A2 1 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 10 A 10 A 2 A 1 A 10 A
at AC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 690 V rated value at 690 V rated value at 690 V rated value at 48 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 24 V rated value at 24 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value	10 20 ms Standard A1 - A2 1 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 10 A 0.15 A
arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 690 V rated value at 690 V rated value at 690 V rated value at 48 V rated value at 110 V rated value at 110 V rated value at 220 V rated value at 600 V rated value	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 10 A 2 A 1 A 10 A
arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 690 V rated value at 690 V rated value at 48 V rated value at 48 V rated value at 48 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 24 V rated value at 25 V rated value at 27 V rated value at 28 V rated value at 29 V rated value at 48 V rated value at 49 V rated value at 49 V rated value at 40 V rated value at 410 V rated value at 410 V rated value at 410 V rated value	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 690 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 220 V rated value at 48 V rated value at 600 V rated value	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 7 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A
arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 690 V rated value at 690 V rated value at 690 V rated value at 48 V rated value at 48 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 125 V rated value at 125 V rated value at 600 V rated value at 127 V rated value at 128 V rated value at 129 V rated value	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 7 A 7 A 10
arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 690 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 220 V rated value at 48 V rated value at 600 V rated value	10 20 ms Standard A1 - A2 1 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 7 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A

• at 480 V rated value	40 A
at 600 V rated value	41 A
yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	3 hp
— at 230 V rated value	7.5 hp
• for 3-phase AC motor	
— at 200/208 V rated value	10 hp
— at 220/230 V rated value	15 hp
 — at 460/480 V rated value 	30 hp
— at 575/600 V rated value	40 hp
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
 for short-circuit protection of the main circuit 	
— with type of coordination 1 required	gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)
— with type of assignment 2 required	gG: 80A (690V,100kA), aM: 50A (690V,100kA), BS88: 63A (415V,80kA)
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	gG: 10 A (500 V, 1 kA)
	1/190° rotation possible on vertical recenting our features by titled for
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	114 mm
width	55 mm
depth	130 mm
required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
for grounded parts	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
 for auxiliary and control circuit 	spring-loaded terminals
 at contactor for auxiliary contacts 	Spring-type terminals
of magnet coil	Spring-type terminals
type of connectable conductor cross-sections for main contacts	
 solid or stranded 	2x (1 35 mm²), 1x (1 50 mm²)
finely stranded with core end processing	2x (1 25 mm²), 1x (1 35 mm²)
connectable conductor cross-section for main contacts	
finely stranded with core end processing	1 35 mm²
connectable conductor cross-section for auxiliary contacts	
 solid or stranded 	0.5 2.5 mm²
 finely stranded with core end processing 	0.5 1.5 mm²
 finely stranded without core end processing 	0.5 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary contacts	
 solid or stranded 	2x (0.5 2.5 mm ²)

 finely stranded with core end processing 	2x (0.5 1.5 mm²)
 finely stranded without core end processing 	2x (0.5 2.5 mm²)
 for AWG cables for auxiliary contacts 	2x (20 14)
AWG number as coded connectable conductor cross section	
• for main contacts	18 1
for auxiliary contacts	20 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 positively driven operation according to IEC 60947-5-1 	No
suitability for use safety-related switching OFF	Yes
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Certificates/ approvals

General Product Approval





Confirmation



<u>KC</u>



	EMC	Functional Safety/Safety of Ma- chinery	Declaration of Conformity	Test Certificates
--	-----	---	---------------------------	-------------------



Type Examination Certificate





Special Test Certificate

Type Test Certificates/Test Report

Marine / Shipping













Marine / Shipping	other	Railway	Dangerous Good	Environment



Confirmation

Confirmation

Vibration and Shock

<u>Transport Information</u>

Environmental Confirmations

urther information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2035-3AG60

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2035-3AG60

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-3AG60


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2035-3AG60&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2035


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2035-3AG60&objecttype=14&gridview=view1







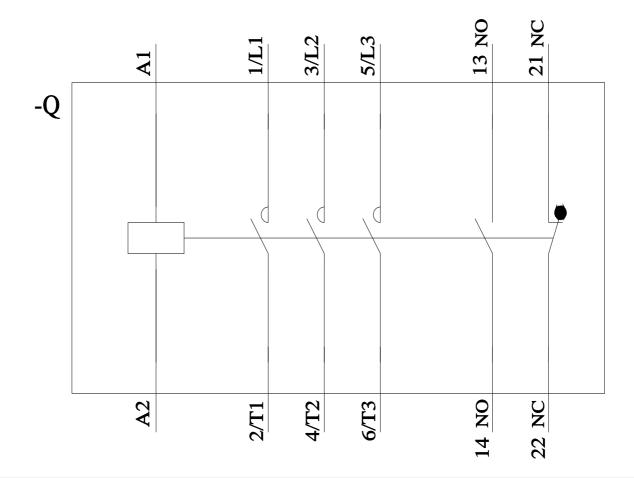

last modified: 8/15/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20353AG60