## 3RT2035-3AL20-1AA0

**Data sheet** 



power contactor, AC-3e/AC-3, 41 A, 18.5 kW / 400 V, 3-pole, 230 V AC, 50/60 Hz, auxiliary contacts: 1 NO + 1 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S2, upright mounting position

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	6.6 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.2 W
without load current share typical	6.5 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	11.8g / 5 ms, 7.4g / 10 ms
shock resistance with sine pulse	
• at AC	18.5g / 5 ms, 11.6g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of contactor typical</li> </ul>	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3	
operating voltage		
• at AC-3 rated value maximum	690 V	
at AC-3e rated value maximum	690 V	
operational current		
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated</li> </ul>	60 A	
value		
• at AC-1		
— up to 690 V at ambient temperature 40 °C rated	60 A	
value	EE A	
<ul> <li>up to 690 V at ambient temperature 60 °C rated value</li> </ul>	55 A	
• at AC-3		
— at 400 V rated value	41 A	
— at 500 V rated value	41 A	
— at 690 V rated value	24 A	
• at AC-3e	277	
— at 400 V rated value	41 A	
— at 500 V rated value	41 A	
— at 690 V rated value	24 A	
at AC-4 at 400 V rated value     at AC-5 cup to 600 V rated value	35 A 52.8 A	
at AC-5a up to 690 V rated value		
at AC-5b up to 400 V rated value	33.2 A	
• at AC-6a		
— up to 230 V for current peak value n=20 rated value	36.5 A	
— up to 400 V for current peak value n=20 rated value	36.5 A	
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	36.5 A	
<ul> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	24 A	
• at AC-6a		
<ul> <li>up to 230 V for current peak value n=30 rated value</li> </ul>	24.2 A	
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	24.2 A	
<ul> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	24.2 A	
<ul> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	24 A	
minimum cross-section in main circuit at maximum AC-1 rated value	16 mm <sup>2</sup>	
operational current for approx. 200000 operating cycles at		
AC-4		
• at 400 V rated value	22 A	
• at 690 V rated value	18.5 A	
operational current		
at 1 current path at DC-1		
— at 24 V rated value	55 A	
— at 60 V rated value	23 A	
— at 110 V rated value	4.5 A	
— at 220 V rated value	1 A	
— at 440 V rated value	0.4 A	
— at 600 V rated value	0.25 A	
with 2 current paths in series at DC-1		
— at 24 V rated value	55 A	
— at 60 V rated value	45 A	
— at 110 V rated value	45 A	
— at 110 V rated value  — at 220 V rated value	5 A	
— at 440 V rated value	1 A	
— at 600 V rated value	0.8 A	
with 3 current paths in series at DC-1  at 24 V sets d valve.	EE A	
— at 24 V rated value	55 A	
— at 60 V rated value	55 A	
— at 110 V rated value	55 A	
— at 220 V rated value	45 A	
— at 440 V rated value	2.9 A	
— at 600 V rated value	1.4 A	
<ul> <li>at 1 current path at DC-3 at DC-5</li> </ul>		

at 24 V rated value	2F A		
— at 24 V rated value	35 A		
— at 60 V rated value	6 A		
— at 220 V rated value	1 A		
— at 440 V rated value	0.1 A		
— at 600 V rated value	0.06 A		
with 2 current paths in series at DC-3 at DC-5			
— at 24 V rated value	55 A		
— at 60 V rated value	45 A		
— at 110 V rated value	25 A		
— at 220 V rated value	5 A		
— at 440 V rated value	0.27 A		
— at 600 V rated value	0.16 A		
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>			
— at 24 V rated value	55 A		
— at 60 V rated value	55 A		
— at 110 V rated value	55 A		
— at 220 V rated value	25 A		
— at 440 V rated value	0.6 A		
— at 600 V rated value	0.35 A		
operating power			
• at AC-2 at 400 V rated value	18.5 kW		
• at AC-3			
— at 230 V rated value	11 kW		
— at 400 V rated value	18.5 kW		
— at 500 V rated value	22 kW		
— at 690 V rated value	22 kW		
• at AC-3e			
— at 230 V rated value	11 kW		
— at 400 V rated value	18.5 kW		
— at 500 V rated value	22 kW		
— at 690 V rated value	22 kW		
operating power for approx. 200000 operating cycles at AC-			
4			
<ul> <li>at 400 V rated value</li> </ul>	11.6 kW		
at 690 V rated value	16.8 kW		
operating apparent power at AC-6a			
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	14.5 kVA		
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	25.2 kVA		
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	31.6 kVA		
<ul> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	28.6 kVA		
operating apparent power at AC-6a			
• up to 230 V for current peak value n=30 rated value	9.6 kVA		
• up to 400 V for current peak value n=30 rated value	16.8 kVA		
• up to 500 V for current peak value n=30 rated value	21 kVA		
• up to 690 V for current peak value n=30 rated value	28.6 kVA		
short-time withstand current in cold operating state up to			
40 °C			
<ul> <li>limited to 1 s switching at zero current maximum</li> </ul>	843 A; Use minimum cross-section acc. to AC-1 rated value		
<ul> <li>limited to 5 s switching at zero current maximum</li> </ul>	596 A; Use minimum cross-section acc. to AC-1 rated value		
<ul> <li>limited to 10 s switching at zero current maximum</li> </ul>	400 A; Use minimum cross-section acc. to AC-1 rated value		
<ul> <li>limited to 30 s switching at zero current maximum</li> </ul>	241 A; Use minimum cross-section acc. to AC-1 rated value		
3			
• limited to 60 s switching at zero current maximum	196 A; Use minimum cross-section acc. to AC-1 rated value		
	196 A; Use minimum cross-section acc. to AC-1 rated value		
• limited to 60 s switching at zero current maximum	196 A; Use minimum cross-section acc. to AC-1 rated value  5 000 1/h		
limited to 60 s switching at zero current maximum     no-load switching frequency			
limited to 60 s switching at zero current maximum     no-load switching frequency     at AC			
limited to 60 s switching at zero current maximum  no-load switching frequency     at AC  operating frequency	5 000 1/h		
limited to 60 s switching at zero current maximum  no-load switching frequency     at AC  operating frequency     at AC-1 maximum	5 000 1/h 1 200 1/h		
Iimited to 60 s switching at zero current maximum  no-load switching frequency     at AC  operating frequency     at AC-1 maximum     at AC-2 maximum	5 000 1/h 1 200 1/h 750 1/h		
Iimited to 60 s switching at zero current maximum  no-load switching frequency     at AC  operating frequency     at AC-1 maximum     at AC-2 maximum     at AC-3 maximum	5 000 1/h 1 200 1/h 750 1/h 1 000 1/h		
Imited to 60 s switching at zero current maximum  no-load switching frequency  at AC  operating frequency  at AC-1 maximum  at AC-2 maximum  at AC-3 maximum  at AC-3 maximum  at AC-3 e maximum	5 000 1/h 1 200 1/h 750 1/h 1 000 1/h 1 000 1/h		

type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	230 V
at 60 Hz rated value	230 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	210 VA
● at 60 Hz	188 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.69
● at 60 Hz	0.65
apparent holding power of magnet coil at AC	
● at 50 Hz	17.2 VA
● at 60 Hz	16.5 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.36
● at 60 Hz	0.39
closing delay	
• at AC	10 80 ms
opening delay	
• at AC	10 18 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts instantaneous contact	1
	40.4
operational current at AC-12 maximum	10 A
operational current at AC-12 maximum operational current at AC-15	10 A
·	10 A
operational current at AC-15	
operational current at AC-15     at 230 V rated value     at 400 V rated value     at 500 V rated value	10 A 3 A 2 A
<ul> <li>operational current at AC-15</li> <li>at 230 V rated value</li> <li>at 400 V rated value</li> </ul>	10 A 3 A
operational current at AC-15  • at 230 V rated value  • at 400 V rated value  • at 500 V rated value  • at 690 V rated value  operational current at DC-12	10 A 3 A 2 A 1 A
operational current at AC-15  • at 230 V rated value  • at 400 V rated value  • at 500 V rated value  • at 690 V rated value  operational current at DC-12  • at 24 V rated value	10 A 3 A 2 A 1 A
operational current at AC-15  • at 230 V rated value  • at 400 V rated value  • at 500 V rated value  • at 690 V rated value  operational current at DC-12  • at 24 V rated value  • at 48 V rated value	10 A 3 A 2 A 1 A
operational current at AC-15  • at 230 V rated value  • at 400 V rated value  • at 500 V rated value  • at 690 V rated value  operational current at DC-12  • at 24 V rated value  • at 48 V rated value  • at 60 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 61 V rated value • at 61 V rated value • at 110 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 6 A 3 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 6 A 2 A 1 A 0.15 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 240 V rated value • at 250 V rated value • at 270 V rated value • at 280 V rated value • at 290 V rated value • at 240 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A  10 A 2 A 1 A 0.15 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 48 V rated value  operational current at DC-13 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A  10 A 2 A 1 A 0.15 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value  operational current at DC-13 • at 24 V rated value • at 60 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 110 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 48 V rated value • at 125 V rated value • at 125 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 24 V rated value • at 15 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 100 V rated value • at 100 V rated value • at 125 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A  0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 220 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 600 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 24 V rated value • at 48 V rated value • at 25 V rated value • at 20 V rated value • at 600 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A  0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 48 V rated value • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 25 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 600 V rated value • at 125 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 126 V rated value • at 127 V rated value • at 128 V rated value • at 129 V rated value • at 200 V rated value • at 200 V rated value • at 480 V rated value  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor • at 480 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 126 V rated value • at 127 V rated value • at 128 V rated value • at 180 V rated value • at 600 V rated value • at 600 V rated value • at 480 V rated value • at 600 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value • at 600 V rated value • at 110 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 1260 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value  contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 126 V rated value • at 127 V rated value • at 128 V rated value • at 180 V rated value • at 600 V rated value • at 600 V rated value • at 480 V rated value • at 600 V rated value	10 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)

— at 230 V rated value	7.5 hp		
• for 3-phase AC motor			
— at 200/208 V rated value	10 hp		
— at 220/230 V rated value	15 hp		
— at 460/480 V rated value	30 hp		
— at 575/600 V rated value	40 hp		
contact rating of auxiliary contacts according to UL	A600 / P600		
Short-circuit protection			
design of the fuse link			
for short-circuit protection of the main circuit			
<ul> <li>— with type of coordination 1 required</li> </ul>	gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)		
— with type of assignment 2 required	gG: 80A (690V,100kA), aM: 50A (690V,100kA), BS88: 63A (415V,80kA)		
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)		
Installation/ mounting/ dimensions	35. 167. (655 1, 118.)		
mounting position	standing, on horizontal mounting surface		
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715		
side-by-side mounting	Yes		
height	114 mm		
width	55 mm		
depth	130 mm		
required spacing			
with side-by-side mounting			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	0 mm		
• for grounded parts			
— forwards	10 mm		
— upwards	10 mm		
— at the side	6 mm		
— downwards	10 mm		
• for live parts			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	6 mm		
Connections/ Terminals			
type of electrical connection			
• for main current circuit	screw-type terminals		
<ul> <li>for auxiliary and control circuit</li> </ul>	spring-loaded terminals		
<ul> <li>at contactor for auxiliary contacts</li> </ul>	Spring-type terminals		
of magnet coil	Spring-type terminals		
type of connectable conductor cross-sections for main contacts			
solid or stranded	2x (1 35 mm²), 1x (1 50 mm²)		
finely stranded with core end processing	2x (1 25 mm²), 1x (1 35 mm²)		
connectable conductor cross-section for main contacts			
finely stranded with core end processing	1 35 mm²		
connectable conductor cross-section for auxiliary contacts			
<ul><li>solid or stranded</li></ul>	0.5 2.5 mm²		
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 1.5 mm <sup>2</sup>		
finely stranded without core end processing	0.5 2.5 mm <sup>2</sup>		
type of connectable conductor cross-sections			
• for auxiliary contacts			
— solid or stranded	2x (0.5 2.5 mm²)		
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²)		
— finely stranded without core end processing	2x (0.5 2.5 mm²)		
for AWG cables for auxiliary contacts	2x (20 14)		
AWG number as coded connectable conductor cross section			
• for main contacts	18 1		
→ 101 Halli Contacts	10 1		

for auxiliary contacts	20 14
Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No
suitability for use safety-related switching OFF	Yes
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Cartificates/ approvals	

Certificates/ approvals

### **General Product Approval**



Confirmation





<u>KC</u>



EMC	Functional Safety/Safety of Ma- chinery	Declaration of Conformity	Test Certificates
-----	---	---------------------------	-------------------



Type Examination Certificate





Type Test Certificates/Test Report

Special Test Certificate

#### Marine / Shipping













Marine / Shipping other Railway Dangerous Good



Confirmation

Confirmation

Vibration and Shock

**Transport Information** 

#### Further informatior

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2035-3AL20-1AA0

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RT2035-3AL20-1AA0}$ 


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-3AL20-1AA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2035-3AL20-1AA0&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current







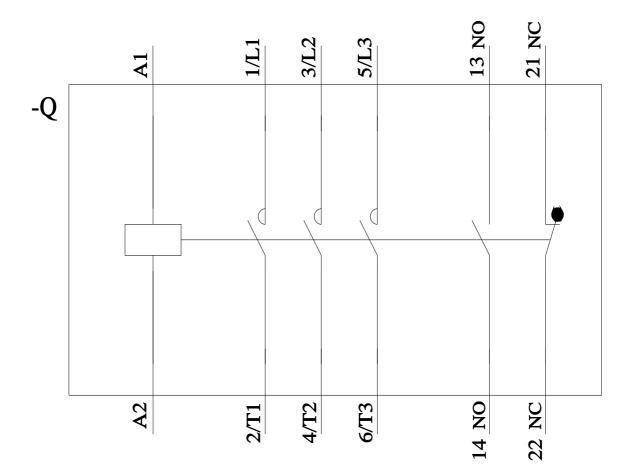

last modified: 8/15/2023 🖸

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20353AL201AA0