# **SIEMENS**

Data sheet 3RT2037-1AU00



power contactor, AC-3e/AC-3, 65 A, 30 kW / 400 V, 3-pole, 240 V AC, 50 Hz, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S2  $\,$ 

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	11.4 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	3.8 W
without load current share typical	6 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	11.8g / 5 ms, 7.4g / 10 ms
shock resistance with sine pulse	
• at AC	18.5g / 5 ms, 11.6g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of contactor typical</li> </ul>	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul><li>during operation</li></ul>	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
• at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated</li> </ul>	80 A
value	
• at AC-1	
<ul> <li>up to 690 V at ambient temperature 40 °C rated value</li> </ul>	80 A
— up to 690 V at ambient temperature 60 °C rated	70 A
value	
• at AC-3	
— at 400 V rated value	65 A
— at 500 V rated value	65 A
— at 690 V rated value	47 A
• at AC-3e	
— at 400 V rated value	65 A
— at 500 V rated value	65 A
— at 690 V rated value	47 A
• at AC-4 at 400 V rated value	55 A
• at AC-5a up to 690 V rated value	70.4 A
• at AC-5b up to 400 V rated value	53.9 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	56.9 A
— up to 400 V for current peak value n=20 rated value	56.9 A
— up to 500 V for current peak value n=20 rated value	56.9 A
— up to 690 V for current peak value n=20 rated value	47 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	38 A
— up to 400 V for current peak value n=30 rated value	38 A
— up to 500 V for current peak value n=30 rated value	38 A
— up to 690 V for current peak value n=30 rated value	38 A
minimum cross-section in main circuit at maximum AC-1 rated value	25 mm²
value operational current for approx. 200000 operating cycles at	25 mm²
value operational current for approx. 200000 operating cycles at AC-4	
value operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value	28 A
value operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value	
value  operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current	28 A
value operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1	28 A 22 A
value operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1  — at 24 V rated value	28 A 22 A 55 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1  — at 24 V rated value — at 60 V rated value	28 A 22 A 55 A 23 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current • at 1 current path at DC-1  — at 24 V rated value  — at 60 V rated value  — at 110 V rated value	28 A 22 A 55 A 23 A 4.5 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value  — at 60 V rated value  — at 110 V rated value  — at 220 V rated value	28 A 22 A 55 A 23 A 4.5 A 1 A
value operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1  — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 120 V rated value — at 440 V rated value — at 440 V rated value	28 A 22 A 55 A 23 A 4.5 A 1 A 0.4 A
value  operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value  — at 60 V rated value  — at 110 V rated value  — at 220 V rated value  — at 440 V rated value  — at 600 V rated value  — at 600 V rated value  — at 600 V rated value	28 A 22 A 55 A 23 A 4.5 A 1 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value  — at 60 V rated value  — at 110 V rated value  — at 220 V rated value  — at 440 V rated value  — at 600 V rated value  — at 600 V rated value  • with 2 current paths in series at DC-1	28 A 22 A 55 A 23 A 4.5 A 1 A 0.4 A 0.25 A
value  operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value  — at 60 V rated value  — at 110 V rated value  — at 220 V rated value  — at 440 V rated value  — at 600 V rated value  — at 600 V rated value  — at 600 V rated value  — at 220 V rated value  — at 440 V rated value  — at 600 V rated value  • with 2 current paths in series at DC-1  — at 24 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value  — at 60 V rated value  — at 110 V rated value  — at 220 V rated value  — at 440 V rated value  — at 600 V rated value  — at 600 V rated value  — at 24 V rated value  — at 600 V rated value  • with 2 current paths in series at DC-1  — at 24 V rated value  — at 60 V rated value  — at 60 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value  — at 60 V rated value  — at 110 V rated value  — at 220 V rated value  — at 440 V rated value  — at 600 V rated value  — at 440 V rated value  — at 600 V rated value  — at 600 V rated value  • with 2 current paths in series at DC-1  — at 24 V rated value  — at 60 V rated value  — at 60 V rated value  — at 60 V rated value  — at 110 V rated value  — at 60 V rated value  — at 60 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A  55 A 45 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value operational current • at 1 current path at DC-1  — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-1  — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 220 V rated value — at 220 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A  55 A 45 A 45 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value  — at 60 V rated value  — at 110 V rated value  — at 220 V rated value  — at 600 V rated value  — at 24 V rated value  — at 22 V rated value  — at 24 V rated value  — at 25 V rated value  — at 26 V rated value  — at 27 V rated value  — at 28 V rated value  — at 29 V rated value  — at 20 V rated value  — at 20 V rated value  — at 24 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A  55 A 45 A 45 A 45 A 45 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value  — at 60 V rated value  — at 110 V rated value  — at 220 V rated value  — at 440 V rated value  — at 600 V rated value  — at 600 V rated value  — at 600 V rated value  • with 2 current paths in series at DC-1  — at 24 V rated value  — at 60 V rated value  — at 20 V rated value  — at 440 V rated value  — at 600 V rated value  — at 600 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A  55 A 45 A 45 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value  — at 60 V rated value  — at 110 V rated value  — at 220 V rated value  — at 440 V rated value  — at 600 V rated value  — at 600 V rated value  — at 600 V rated value  • with 2 current paths in series at DC-1  — at 24 V rated value  — at 60 V rated value  — at 440 V rated value  — at 440 V rated value  — at 10 V rated value  — at 440 V rated value  — at 440 V rated value  — at 600 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A  55 A 45 A 45 A 45 A 5 A 1 A 0.8 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value  — at 60 V rated value  — at 110 V rated value  — at 220 V rated value  — at 440 V rated value  — at 600 V rated value  — at 600 V rated value  — at 600 V rated value  • with 2 current paths in series at DC-1  — at 24 V rated value  — at 60 V rated value  — at 440 V rated value  — at 60 V rated value  — at 60 V rated value  — at 110 V rated value  — at 440 V rated value  • with 3 current paths in series at DC-1  — at 24 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A  55 A 45 A 45 A 5 A 1 A 0.8 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value  • with 2 current paths in series at DC-1  — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 440 V rated value  • with 2 current paths in series at DC-1  — at 24 V rated value — at 60 V rated value — at 10 V rated value — at 440 V rated value — at 600 V rated value — at 24 V rated value  • with 3 current paths in series at DC-1  — at 24 V rated value — at 60 V rated value — at 60 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A  55 A 45 A 45 A 5 A 1 A 0.8 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 440 V rated value — at 110 V rated value — at 440 V rated value — at 220 V rated value — at 24 V rated value — at 600 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A  55 A 45 A 45 A 5 A 5 A 5 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value  • with 2 current paths in series at DC-1  — at 24 V rated value — at 60 V rated value — at 60 V rated value — at 60 V rated value  — at 60 V rated value — at 110 V rated value — at 440 V rated value — at 220 V rated value — at 24 V rated value — at 24 V rated value — at 600 V rated value — at 600 V rated value — at 600 V rated value — at 110 V rated value — at 24 V rated value — at 20 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A  55 A 45 A 45 A 5 A 1 A 0.8 A
operational current for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value  operational current  • at 1 current path at DC-1  — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 440 V rated value — at 600 V rated value — at 24 V rated value — at 60 V rated value — at 110 V rated value — at 440 V rated value — at 110 V rated value — at 440 V rated value — at 220 V rated value — at 24 V rated value — at 600 V rated value	28 A 22 A  55 A 23 A 4.5 A 1 A 0.4 A 0.25 A  55 A 45 A 45 A 5 A 5 A 5 A 5 A

	— at 24 V rated value	35 A
	— at 60 V rated value	6 A
	— at 220 V rated value	1 A
- with 2 current paths in series at DC-3 at DC-5  - at 24 V raied value - at 200 V raied va	— at 440 V rated value	0.1 A
	— at 600 V rated value	0.06 A
	<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
	— at 24 V rated value	55 A
al 220 V risted value at 600 V risted value 55 A at 24 V risted value 55 A at 27 V risted value 25 A at 600 V risted value 25 A -	— at 60 V rated value	45 A
	— at 110 V rated value	25 A
■ 1800 V rited value   0.16 A	— at 220 V rated value	5 A
* with 3 current paths in series at DC-3 at DC-5	— at 440 V rated value	0.27 A
	— at 600 V rated value	0.16 A
	<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
at 110 V rated value at 220 V rated value at 800 V rated value 20 rated value	— at 24 V rated value	55 A
	— at 60 V rated value	55 A
	— at 110 V rated value	55 A
operating power  • at AC-2 at 40 OV rated value  • at AC-3  — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 600 V rated value — at 600 V rated value — at 500 V rated value — at 600	— at 220 V rated value	25 A
operating power  • at AC-2 at 40 OV rated value  • at AC-3  — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 600 V rated value — at 600 V rated value — at 500 V rated value — at 600	— at 440 V rated value	0.6 A
at AC-2 at 400 V rated value		
• at AC-2 at 400 V rated value • at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 400 V rated value — at 600 V rated value  operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 600 V rated value  operating apparent power at AC-6a • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up t		
- at 230 V rated value		30 kW
at 400 V rated value at 690 V rated value at 690 V rated value at 690 V rated value at 230 V rated value at 230 V rated value at 400 V rated value at 690 V for current peak value n=20 rated value at 690 V for current peak value n=20 rated value at 690 V for current peak value n=20 rated value at 690 V for current peak value n=30 rated value at 690 V for current peak value n=60 rated value at		18.5 kW
- at 500 V rated value - at 690 V rated value - 37 kW    * at AC-3e   - at 230 V rated value		
at AC-3e     — at 230 V rated value     — at 400 V rated value     — at 500 V rated value     — at 500 V rated value     — at 690 V rated value     • at 400 V rated value     • at 690 V rated value     • at 690 V rated value     • pu to 230 V for current peak value n=20 rated value     • up to 500 V for current peak value n=20 rated value     • up to 500 V for current peak value n=20 rated value     • up to 500 V for current peak value n=20 rated value     • up to 500 V for current peak value n=30 rated value     • up to 230 V for current peak value n=30 rated value     • up to 500 V for current		
• at AC-3e  — at 230 V rated value — at 690 V rated value — at 60-3 maximum — at 60-3 maximum — at 60-3 maximum — at 60-4 ma		
- at 230 V rated value - at 400 V rated value - at 590 V rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=30 rated value - at 690 V for current peak		37 KVV
- at 400 V rated value - at 500 V rated value 37 kW  operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • to 500 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak value n=30 rated value • to 600 V for current peak val		40 E IAM
- at 500 V rated value - at 690 V rated value - at 690 V rated value  operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value • at 690 V rated value  operating apparent power at AC-6a • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value  operating apparent power at AC-6a • up to 230 V for current peak value n=30 rated value  operating apparent power at AC-6a • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • initited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 50 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • li		
operating power for approx. 200000 operating cycles at AC-4  at 400 V rated value at 690 V rated value 14.7 kW 20 kW  operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 500 V for current peak value n=30 rated value operating apparent power at AC-6a  up to 230 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value sup to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 32.8 kVA  550 X Use minimum cross-section acc. to AC-1 rated value ilimited to 1 s switching at zero current maximum ilimited to 30 s switching at zero current maximum ilimited to 30 s switching at zero current maximum ilimited to 30 s switching at zero current maximum ilimited to 30 s switching at zero current maximum ilimited to 30 s switching at zero current maximum at AC-3 maximum  ot AC-1 maximum at AC-3 maximum  at AC-3 maximum  at AC-3 maximum  ot AC-4 maximum  at AC-4 maximum  at AC-4 maximum  operating frequency  at AC-4 maximum  at AC-4 maximum  ot AC-4 maximum  at AC-4 maximum  operating frequency  at AC-4 maximum  ot AC-4 maximum  out at AC-4 maximum  out at AC-3 maximum  out at AC-3 maximum  out at AC-4 maximum		
operating power for approx. 20000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=30 rated value • up to 230 V for current peak value n=30 rated value • up to 230 V for current peak value n=30 rated value • up to 230 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero curre		
* at 400 V rated value     * at 690 V rated value     * at 690 V rated value     * operating apparent power at AC-6a     * up to 230 V for current peak value n=20 rated value     * up to 400 V for current peak value n=20 rated value     * up to 690 V for current peak value n=20 rated value     * up to 690 V for current peak value n=20 rated value     * up to 690 V for current peak value n=20 rated value     * ou pto 230 V for current peak value n=30 rated value     * up to 230 V for current peak value n=30 rated value     * up to 400 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * up to 690 V for current peak value n=30 rated value     * value n=30 rated value     * 32.8 kVA     * 45.3 kVA      * 45.3 kVA      * 45.3 kVA      * 45.4 kVA      * 45.5		37 KW
at 400 V rated value  at 690 V rated value  operating apparent power at AC-6a  up to 230 V for current peak value n=20 rated value  up to 500 V for current peak value n=20 rated value  up to 690 V for current peak value n=20 rated value  up to 230 V for current peak value n=20 rated value  up to 690 V for current peak value n=30 rated value  up to 230 V for current peak value n=30 rated value  up to 400 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 690 V for current peak value n=30 rated value  up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to  40 °C  ilimited to 1 s switching at zero current maximum  ilimited to 5 s switching at zero current maximum  ilimited to 10 s switching at zero current maximum  ilimited to 60 s switching at zero current maximum  ilimited to 60 s switching at zero current maximum  ilimited to 60 s switching at zero current maximum  ilimited to 60 s switching at zero current maximum  ilimited to 60 s switching at zero current maximum  ilimited to 60 s switching at zero current maximum  ilimited to 60 s switching at zero current maximum  ilimited to 60 s switching at zero current maximum  ilimited to 60 s switching at zero current maximum  at AC-3 maximum  at AC-3 maximum  at AC-3 maximum  at AC-3 maximum  at AC-4 maximum		
operating apparent power at AC-6a  oup to 230 V for current peak value n=20 rated value oup to 500 V for current peak value n=20 rated value oup to 500 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value operating apparent power at AC-6a oup to 230 V for current peak value n=30 rated value oup to 500 V for current peak value n=30 rated value oup to 500 V for current peak value n=30 rated value oup to 690 V for		14.7 kW
operating apparent power at AC-6a  • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  730 A; Use minimum cross-section acc. to AC-1 rated value • limited to 60 s switching at zero current maximum  272 A; Use minimum cross-section acc. to AC-1 rated value  736 A; Use minimum cross-section acc. to AC-1 rated value  800 1/h • at AC-2 maximum • at AC-3 maximum • at AC-4 maximum • at AC-4 maximum • at AC-3 maximum • at AC-4 maximum • at AC-4 maximum • at AC-4 maximum	at 690 V rated value	20 kW
up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for c		
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C  ilmited to 1 s switching at zero current maximum ilmited to 10 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum  no-load switching frequency at AC  operating frequency  at AC-1 maximum at AC-2 maximum  400 1/h  at AC-2 maximum 700 1/h  at AC-3 maximum 700 1/h  at AC-3 maximum 700 1/h  at AC-3 maximum 700 1/h  at AC-4 maximum 700 1/h		22.6 kVA
up to 500 V for current peak value n=20 rated value     up to 690 V for current peak value n=20 rated value     operating apparent power at AC-6a     up to 230 V for current peak value n=30 rated value     up to 400 V for current peak value n=30 rated value     up to 500 V for current peak value n=30 rated value     up to 690 V for current peak value n=30 rated value     up to 690 V for current peak value n=30 rated value     up to 690 V for current peak value n=30 rated value     up to 690 V for current peak value n=30 rated value     up to 690 V for current peak value n=30 rated value     up to 690 V for current peak value n=30 rated value     short-time withstand current in cold operating state up to 40 °C     ilimited to 1 s switching at zero current maximum     ilimited to 5 s switching at zero current maximum     ilimited to 10 s switching at zero current maximum     ilimited to 30 s switching at zero current maximum     ilimited to 60 s switching at zero current maximum		
• up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a      • up to 230 V for current peak value n=30 rated value     • up to 400 V for current peak value n=30 rated value     • up to 500 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • limited to 1 s switching at zero current maximum     • limited to 5 s switching at zero current maximum     • limited to 10 s switching at zero current maximum     • limited to 30 s switching at zero current maximum     • limited to 60 s switching at		
operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  • up to 690 V for current in cold operating state up to  40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • loos day to the form of the		
• up to 230 V for current peak value n=30 rated value     • up to 400 V for current peak value n=30 rated value     • up to 500 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value     • up to 690 V for current peak value n=30 rated value      • limited to 1 s switching at zero current maximum     • limited to 5 s switching at zero current maximum     • limited to 10 s switching at zero current maximum     • limited to 10 s switching at zero current maximum     • limited to 30 s switching at zero current maximum     • limited to 6		00.11077
<ul> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 6</li></ul>		15.1 k)/A
up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C  limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum  no-load switching frequency at AC  state of the switching state up to 45.3 kVA  45.4 kVA  45.3 kVA  45.4 kVA  45.3 k		
• up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  730 A; Use minimum cross-section acc. to AC-1 rated value  520 A; Use minimum cross-section acc. to AC-1 rated value  272 A; Use minimum cross-section acc. to AC-1 rated value  75000 1/h  75000 1/h  9at AC-2 maximum  400 1/h  • at AC-3 maximum  700 1/h  • at AC-4 maximum  700 1/h  • at AC-4 maximum  700 1/h		
short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  730 A; Use minimum cross-section acc. to AC-1 rated value  520 A; Use minimum cross-section acc. to AC-1 rated value  272 A; Use minimum cross-section acc. to AC-1 rated value  736 A; Use minimum cross-section acc. to AC-1 rated value  737 A; Use minimum cross-section acc. to AC-1 rated value  738 A; Use minimum cross-section acc. to AC-1 rated value  739 A; Use minimum cross-section acc. to AC-1 rated value  740 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-section acc. to AC-1 rated value  750 A; Use minimum cross-secti		
• limited to 1 s switching at zero current maximum     • limited to 5 s switching at zero current maximum     • limited to 5 s switching at zero current maximum     • limited to 10 s switching at zero current maximum     • limited to 30 s switching at zero current maximum     • limited to 30 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching at zero current maximum     • limited to 60 s switching frequency     • at AC     • at AC-1 maximum     • at AC-2 maximum     • at AC-3 maximum     • at AC-3 maximum     • at AC-3 maximum     • at AC-4 maximum     • at AC-9 maximum     •		HU. UVM
<ul> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>336 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>272 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>272 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>360 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>360 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>272 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>272 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>272 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>272 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>272 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>273 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>274</li></ul>		
<ul> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>at AC</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> <li>at AC-5 maximum</li> <li>at AC-6 maximum</li> <li>at AC-6 maximum</li> <li>at AC-7 maximum</li> <li>at AC-8 maximum</li> <li>at AC-9 maximum</li> <li>at</li></ul>		1 055 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>no-load switching frequency</li> <li>at AC</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> </ul>	-	
<ul> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>272 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>no-load switching frequency</li> <li>at AC</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> </ul>	-	
<ul> <li>limited to 60 s switching at zero current maximum</li> <li>no-load switching frequency</li> <li>at AC</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> </ul>		
no-load switching frequency <ul> <li>at AC</li> <li>5 000 1/h</li> </ul> operating frequency <ul> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> </ul> 700 1/h	-	
<ul> <li>at AC</li> <li>5 000 1/h</li> <li>operating frequency</li> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>200 1/h</li> </ul>		2. 2, 500 minimum oroso sociion doc. to no mateu value
operating frequency       800 1/h         • at AC-1 maximum       800 1/h         • at AC-2 maximum       400 1/h         • at AC-3 maximum       700 1/h         • at AC-3e maximum       700 1/h         • at AC-4 maximum       200 1/h		5 000 1/h
<ul> <li>at AC-1 maximum</li> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>at AC-4 maximum</li> </ul>		0 000 mil
<ul> <li>at AC-2 maximum</li> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>200 1/h</li> </ul>		800 1/h
<ul> <li>at AC-3 maximum</li> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>200 1/h</li> </ul>		
<ul> <li>at AC-3e maximum</li> <li>at AC-4 maximum</li> <li>200 1/h</li> </ul>		
• at AC-4 maximum 200 1/h		
Control Circuit/ Control		200 1/11
	Control circuit/ Control	

type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	240 V
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	190 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.72
apparent holding power of magnet coil at AC	
● at 50 Hz	16 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.37
closing delay	
• at AC	10 80 ms
opening delay	
• at AC	10 18 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	10 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
at 690 V rated value	1 A
operational current at DC-12	
at 24 V rated value	10 A
• at 48 V rated value	6 A
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
• at 220 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	
at 24 V rated value	10 A
at 48 V rated value	2 A
• at 60 V rated value	2 A
at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	65 A
at 600 V rated value	52 A
yielded mechanical performance [hp]	
• for single-phase AC motor	E ha
— at 110/120 V rated value	5 hp
— at 230 V rated value	10 hp
• for 3-phase AC motor	20 ha
— at 200/208 V rated value	20 hp
<ul> <li>— at 220/230 V rated value</li> </ul>	
ot 460/490 \/ rated ::alica	20 hp
<ul><li>— at 460/480 V rated value</li><li>— at 575/600 V rated value</li></ul>	50 hp 50 hp

contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
for short-circuit protection of the main circuit	
— with type of coordination 1 required	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)
— with type of assignment 2 required	gG: 125A (690V,100kA), aM: 63A (690V,100kA), BS88: 100A (415V,80kA)
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	114 mm
width	55 mm
depth	130 mm
required spacing	
<ul> <li>with side-by-side mounting</li> </ul>	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
<ul> <li>for grounded parts</li> </ul>	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
at contactor for auxiliary contacts	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections for main contacts	
solid or stranded	2x (1 35 mm²), 1x (1 50 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 25 mm²), 1x (1 35 mm²)
connectable conductor cross-section for main contacts	
<ul> <li>finely stranded with core end processing</li> </ul>	1 35 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 2.5 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
for AWG cables for auxiliary contacts	2x (20 16), 2x (18 14)
AWG number as coded connectable conductor cross section	
• for main contacts	18 1
for auxiliary contacts	20 14
Safety related data	
Safety related data product function	
product function	Yes
product function  ● mirror contact according to IEC 60947-4-1	
•	Yes No Yes

proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Certificates/ approvals

### **General Product Approval**





Confirmation



<u>KC</u>



Functional
Safety/Safety of Machinery

**Declaration of Conformity** 

**Test Certificates** 



Type Examination Certificate





Type Test Certificates/Test Report

Special Test Certificate

## Marine / Shipping













Marine / Shipping

other

Railway

**Dangerous Good** 

**Environment** 



Confirmation

Confirmation

Vibration and Shock

Transport Information

Environmental Confirmations

### **Further information**

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2037-1AU00

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2037-1AU00

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 

https://support.industry.siemens.com/cs/ww/en/ps/3RT2037-1AU00

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2037-1AU00&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2037-1AU00/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2037-1AU00&objecttype=14&gridview=view1

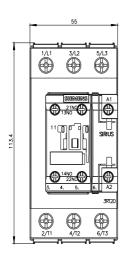

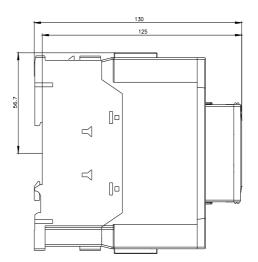


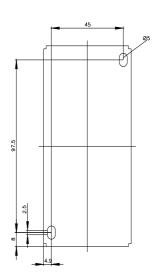

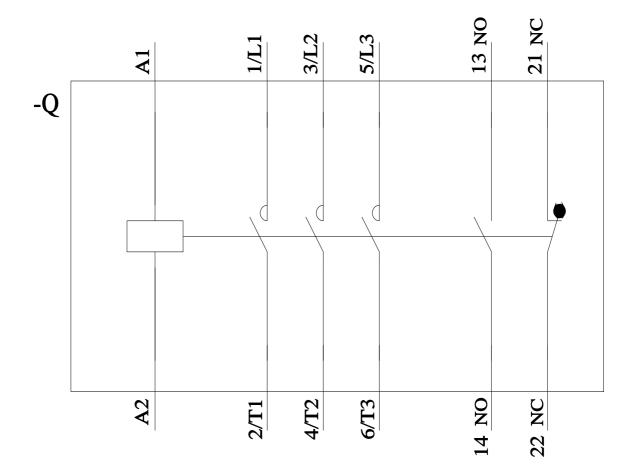

last modified:

8/15/2023

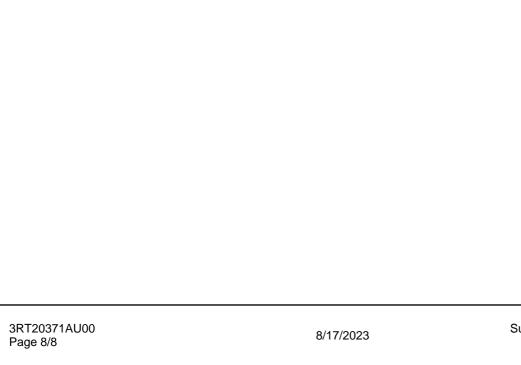

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20371AU00