# **SIEMENS**

Data sheet 3RT2038-1AK64



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 110 V AC, 50 Hz / 120 V, 60 Hz, auxiliary contacts: 2 NO + 2 NC, screw terminal, size: S2, removable auxiliary switch

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	No
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	17.1 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	5.7 W
without load current share typical	6.5 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	9.8g / 5 ms, 6.5g / 10 ms
shock resistance with sine pulse	
• at AC	15.3g / 5 ms, 10.1g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

3
690 V
690 V
90 A
90 A
80 A
80 A
80 A
58 A
80 A
80 A
58 A
55 A
79.2 A
66.4 A
70 A
70 A
70 A
58 A
46.7 A
46.7 A
46.7 A
46.7 A
35 mm²
30 A
24 A
55 A
23 A
4.5 A
4.5 A 1 A
1 A
1 A 0.4 A
1 A 0.4 A
1 A 0.4 A 0.25 A
1 A 0.4 A 0.25 A 55 A 45 A
1 A 0.4 A 0.25 A 55 A 45 A
1 A 0.4 A 0.25 A 55 A 45 A 45 A 5 A
1 A 0.4 A 0.25 A  55 A 45 A 45 A 5 A 1 A
1 A 0.4 A 0.25 A 55 A 45 A 45 A 5 A
1 A 0.4 A 0.25 A  55 A 45 A 45 A 5 A 1 A 0.8 A
1 A 0.4 A 0.25 A  55 A 45 A 45 A 5 A 1 A 0.8 A
1 A 0.4 A 0.25 A  55 A 45 A 45 A 5 A 1 A 0.8 A
1 A 0.4 A 0.25 A  55 A 45 A 45 A 1 A 0.8 A
1 A 0.4 A 0.25 A  55 A 45 A 5 A 1 A 0.8 A  55 A 55 A 55 A 55 A
1 A 0.4 A 0.25 A  55 A 45 A 45 A 5 A 1 A 0.8 A

— at 24 V rated value	35 A
— at 60 V rated value	6 A
— at 220 V rated value	1A
— at 440 V rated value	0.1 A
— at 600 V rated value	0.06 A
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	25 A
— at 220 V rated value	5 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	25 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.35 A
operating power	
• at AC-2 at 400 V rated value	37 kW
• at AC-3	
— at 230 V rated value	22 kW
— at 400 V rated value	37 kW
— at 500 V rated value	37 kW
— at 690 V rated value	45 kW
• at AC-3e	
— at 230 V rated value	22 kW
— at 400 V rated value	37 kW
— at 500 V rated value	37 kW
— at 690 V rated value	45 kW
operating power for approx. 200000 operating cycles at AC-	
4	
at 400 V rated value	15.8 kW
at 690 V rated value	21.8 kW
operating apparent power at AC-6a	
• up to 230 V for current peak value n=20 rated value	27.8 kVA
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	48.4 kVA
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	60.6 kVA
up to 690 V for current peak value n=20 rated value	69.3 kVA
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	18.6 kVA
• up to 400 V for current peak value n=30 rated value	32.3 kVA
• up to 500 V for current peak value n=30 rated value	40.4 kVA
• up to 690 V for current peak value n=30 rated value	55.8 kVA
short-time withstand current in cold operating state up to	
40 °C	1 200 At Lieu minimum group position and to A.C. 4 and a lively
limited to 1 s switching at zero current maximum	1 298 A; Use minimum cross-section acc. to AC-1 rated value
limited to 5 s switching at zero current maximum	898 A; Use minimum cross-section acc. to AC-1 rated value
limited to 10 s switching at zero current maximum	640 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 30 s switching at zero current maximum	414 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 60 s switching at zero current maximum	333 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	F 000 4 lb
• at AC	5 000 1/h
operating frequency	700.44
• at AC-1 maximum	700 1/h
• at AC-2 maximum	350 1/h
• at AC-3 maximum	500 1/h
• at AC-3e maximum	500 1/h
at AC-4 maximum	150 1/h
Control circuit/ Control	

type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	110 V
at 60 Hz rated value	120 V
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 1.1
● at 60 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	212 VA
● at 60 Hz	188 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.69
• at 60 Hz	0.65
apparent holding power of magnet coil at AC	
• at 50 Hz	18.5 VA
• at 60 Hz	16.5 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.36
• at 60 Hz	0.39
closing delay	
• at AC	10 80 ms
opening delay	
• at AC	10 18 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	2
number of NO contacts for auxiliary contacts instantaneous	2
contact	
	10 A
contact	10 A
contact operational current at AC-12 maximum	10 A 6 A
contact operational current at AC-12 maximum operational current at AC-15	
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value	6 A 3 A 2 A
contact operational current at AC-12 maximum operational current at AC-15  • at 230 V rated value • at 400 V rated value	6 A 3 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value	6 A 3 A 2 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value	6 A 3 A 2 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value	6 A 3 A 2 A 1 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value	6 A 3 A 2 A 1 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 24 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 24 V rated value  operational current at DC-13 • at 24 V rated value • at 48 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A  0.15 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 600 V rated value • at 600 V rated value  operational current at DC-13 • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A  0.15 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 148 V rated value • at 148 V rated value • at 155 V rated value • at 150 V rated value • at 110 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 125 V rated value • at 24 V rated value • at 25 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 29 V rated value • at 20 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 100 V rated value • at 200 V rated value • at 200 V rated value • at 600 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 125 V rated value • at 125 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A  0.15 A
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 110 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 20 V rated value • at 20 V rated value • at 20 V rated value • at 60 V rated value • at 110 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 600 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 110 V rated value • at 125 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 8 V rated value • at 60 V rated value • at 110 V rated value • at 110 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 24 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 27 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 24 V rated value • at 48 V rated value • at 25 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 480 V rated value • at 600 V rated value • at 600 V rated value • at 480 V rated value • at 480 V rated value • at 480 V rated value • at 600 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 8 V rated value • at 60 V rated value • at 110 V rated value • at 110 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 24 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 27 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value	6 A 3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)

— at 230 V rated value	15 hp
• for 3-phase AC motor	
— at 200/208 V rated value	20 hp
— at 220/230 V rated value	25 hp
— at 460/480 V rated value	50 hp
— at 575/600 V rated value	60 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
<ul> <li>for short-circuit protection of the main circuit</li> </ul>	
<ul><li>— with type of coordination 1 required</li></ul>	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)
<ul> <li>— with type of assignment 2 required</li> </ul>	gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- $22.5^\circ$ on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	114 mm
width	55 mm
depth	174 mm
required spacing	
<ul> <li>with side-by-side mounting</li> </ul>	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
<ul> <li>for grounded parts</li> </ul>	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
at contactor for auxiliary contacts	Screw-type terminals
• of magnet coil	Screw-type terminals
type of connectable conductor cross-sections for main contacts	
solid or stranded	2x (1 35 mm²), 1x (1 50 mm²)
• finely stranded with core end processing	2x (1 25 mm²), 1x (1 35 mm²)
connectable conductor cross-section for main contacts	
• finely stranded with core end processing	1 35 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 2.5 mm²
• finely stranded with core end processing	0.5 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
for AWG cables for auxiliary contacts	2x (20 16), 2x (18 14)
AWG number as coded connectable conductor cross section	
• for main contacts	18 1
for auxiliary contacts	20 14
,	

Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No
suitability for use safety-related switching OFF	Yes
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

#### Certificates/ approvals

### **General Product Approval**





Confirmation



<u>KC</u>





Type Examination Certificate





Type Test Certificates/Test Report

Special Test Certificate

#### Marine / Shipping















Confirmation

Confirmation

Vibration and Shock

**Transport Information** 

Environmental Confirmations

#### Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2038-1AK64

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2038-1AK64

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 


https://support.industry.siemens.com/cs/ww/en/ps/3RT2038-1AK64


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2038-1AK64&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RT2038-1AK64/char Further characteristics (e.g. electrical endurance, switching frequency)








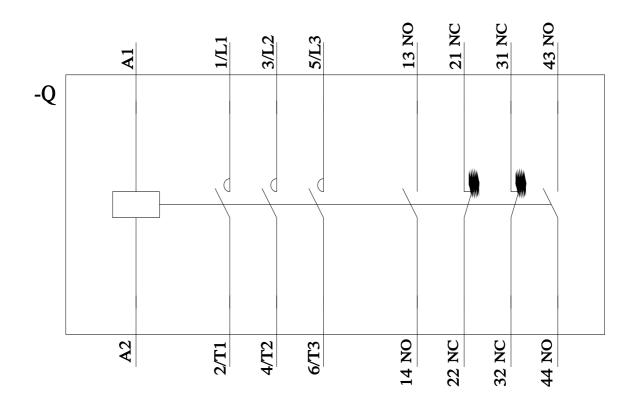

last modified: 8/15/2023 🖸

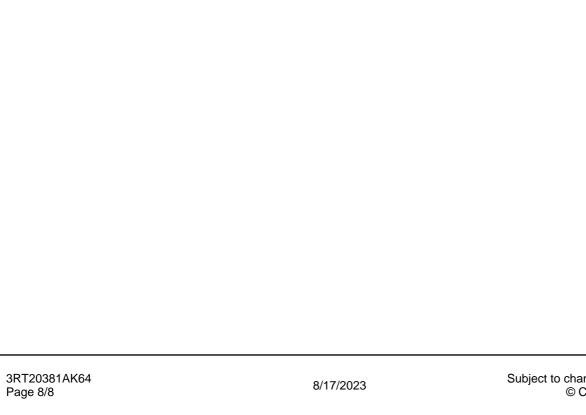

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20381AK64