SIEMENS

Data sheet 3RT2038-1NP30



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 175-280 V AC/DC, 50/60 Hz, with integrated varistor, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S2

SIRIUS
Power contactor
3RT2
S2
No
Yes
17.1 W
5.7 W
1 W
690 V
690 V
6 kV
6 kV
400 V
7.7g / 5 ms, 4.5g / 10 ms
7.7g / 5 ms, 4.5g / 10 ms
12g / 5 ms, 7g / 10 ms
12g / 5 ms, 7g / 10 ms
10 000 000
5 000 000
10 000 000
Q
10/01/2014
Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8
2 000 m
-25 +60 °C
-55 +80 °C
10 %

relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
ain circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
 at AC-3 rated value maximum 	690 V
at AC-3e rated value maximum	690 V
operational current	
at AC-1 at 400 V at ambient temperature 40 °C rated value	90 A
 at AC-1 — up to 690 V at ambient temperature 40 °C rated value 	90 A
— up to 690 V at ambient temperature 60 °C rated value	80 A
• at AC-3	
— at 400 V rated value	80 A
— at 500 V rated value	80 A
— at 690 V rated value	58 A
• at AC-3e	
— at 400 V rated value	80 A
— at 500 V rated value	80 A
— at 690 V rated value	58 A
• at AC-4 at 400 V rated value	55 A
• at AC-5a up to 690 V rated value	79.2 A
at AC-5b up to 400 V rated value	66.4 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	70 A
— up to 400 V for current peak value n=20 rated value	70 A
— up to 500 V for current peak value n=20 rated value	70 A
— up to 690 V for current peak value n=20 rated value	58 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	46.7 A
— up to 400 V for current peak value n=30 rated value	46.7 A
— up to 500 V for current peak value n=30 rated value	46.7 A
— up to 690 V for current peak value n=30 rated value	46.7 A
minimum cross-section in main circuit at maximum AC-1 rated value	35 mm²
operational current for approx. 200000 operating cycles at AC-4	
at 400 V rated value	30 A
at 690 V rated value	24 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	23 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
 with 3 current paths in series at DC-1 	
— at 24 V rated value	55 A
— at 60 V rated value	55 A


— at 220 V rated value	45 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
at 1 current path at DC-3 at DC-5	
— at 24 V rated value	35 A
— at 60 V rated value	6 A
— at 220 V rated value	1 A
— at 440 V rated value	0.1 A
— at 600 V rated value	0.06 A
with 2 current paths in series at DC-3 at DC-5	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	25 A
— at 220 V rated value	5 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
with 3 current paths in series at DC-3 at DC-5	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	25 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.35 A
operating power	
at AC-2 at 400 V rated value	37 kW
• at AC-3	
— at 230 V rated value	22 kW
— at 400 V rated value	37 kW
— at 500 V rated value	37 kW
— at 690 V rated value	45 kW
• at AC-3e	
— at 230 V rated value	22 kW
— at 400 V rated value	37 kW
— at 500 V rated value	37 kW
— at 690 V rated value	45 kW
operating power for approx. 200000 operating cycles at AC-	
at 400 V rated value	15.8 kW
at 400 V rated value at 690 V rated value	21.8 kW
operating apparent power at AC-6a	21.0 KVV
	27.9 ١٨/٨
up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value	27.8 kVA 48.4 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value	48.4 KVA 60.6 kVA
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value 	69.3 kVA
operating apparent power at AC-6a	0.0 KV/
up to 230 V for current peak value n=30 rated value	18.6 kVA
up to 400 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value	32.3 kVA
up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value	40.4 kVA
up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value	55.8 kVA
short-time withstand current in cold operating state up to	
40 °C	
 limited to 1 s switching at zero current maximum 	1 298 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 5 s switching at zero current maximum 	898 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 10 s switching at zero current maximum 	640 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 30 s switching at zero current maximum 	414 A; Use minimum cross-section acc. to AC-1 rated value
limited to 60 s switching at zero current maximum	333 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	1 500 1/h
• at DC	1 500 1/h
at DC operating frequency	1 500 1/h

• at AC-2 maximum	350 1/h
• at AC-3 maximum	500 1/h
• at AC-3e maximum	500 1/h
at AC-4 maximum	150 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
 at 50 Hz rated value 	175 280 V
at 60 Hz rated value	175 280 V
control supply voltage at DC	
rated value	175 280 V
operating range factor control supply voltage rated value of	
magnet coil at DC	
• initial value	0.8
full-scale value	1.1
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
● at 60 Hz	0.8 1.1
design of the surge suppressor	with varistor
inrush current peak	5 A
duration of inrush current peak	30 μs
locked-rotor current mean value	0.2 A
locked-rotor current peak	0.42 A
duration of locked-rotor current	230 ms
holding current mean value	6 mA
apparent pick-up power of magnet coil at AC	
● at 50 Hz	40 VA
● at 60 Hz	40 VA
apparent holding power	
 at minimum rated control supply voltage at DC 	2 VA
at maximum rated control supply voltage at DC	2 VA
apparent holding power	
 at minimum rated control supply voltage at AC 	
— at 50 Hz	2 VA
— at 60 Hz	2 VA
 at maximum rated control supply voltage at AC 	
— at 50 Hz	2 VA
— at 60 Hz	2 VA
apparent holding power of magnet coil at AC	
at 50 Hz	2 VA
• at 60 Hz	2 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.95
• at 60 Hz	0.95
closing power of magnet coil at DC	23 W
holding power of magnet coil at DC	1 W
closing delay	
• at AC	35 110 ms
• at DC	35 110 ms
opening delay	
• at AC	30 55 ms
• at DC	30 55 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	

• at 230 V rated value	10 A
 at 400 V rated value 	3 A
 at 500 V rated value 	2 A
at 690 V rated value	1 A
operational current at DC-12	
at 24 V rated value	10 A
 at 48 V rated value 	6 A
at 60 V rated value	6 A
 at 110 V rated value 	3 A
at 125 V rated value	2 A
 at 220 V rated value 	1 A
at 600 V rated value	0.15 A
operational current at DC-13	
at 24 V rated value	10 A
at 48 V rated value	2 A
• at 60 V rated value	2 A
at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	65 A
at 600 V rated value	62 A
yielded mechanical performance [hp]	
for single-phase AC motor	
— at 110/120 V rated value	5 hp
— at 230 V rated value	15 hp
• for 3-phase AC motor	
— at 200/208 V rated value	20 hp
— at 220/230 V rated value	25 hp
— at 460/480 V rated value	50 hp
— at 575/600 V rated value	60 hp
contact rating of auxiliary contacts according to UL Short-circuit protection	A600 / P600
design of the fuse link • for short-circuit protection of the main circuit	
with type of coordination 1 required	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80
— with type of coordination i required	(415 V, 60 KA)
— with type of assignment 2 required	gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	114 mm
width	55 mm
depth	130 mm
required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
• for grounded parts	40
— forwards	10 mm
— upwards	10 mm
— at the side — downwards	6 mm 10 mm
(10)WINWALUS	

• for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
 for auxiliary and control circuit 	screw-type terminals
 at contactor for auxiliary contacts 	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections for main contacts	
 solid or stranded 	2x (1 35 mm²), 1x (1 50 mm²)
finely stranded with core end processing	2x (1 25 mm²), 1x (1 35 mm²)
connectable conductor cross-section for main contacts	
finely stranded with core end processing	1 35 mm²
connectable conductor cross-section for auxiliary contacts	
 solid or stranded 	0.5 2.5 mm²
finely stranded with core end processing	0.5 2.5 mm²
type of connectable conductor cross-sections	
 for auxiliary contacts 	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 for AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14)
AWG number as coded connectable conductor cross section	
• for main contacts	18 1
for auxiliary contacts	20 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 positively driven operation according to IEC 60947-5-1 	No
suitability for use safety-related switching OFF	Yes
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
with low demand rate according to SN 31920	40 %
with high demand rate according to SN 31920	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Cortificates/approvals	

Certificates/ approvals







Confirmation



Miscellaneous

<u>KC</u>

General Product Approval

EMC

Functional Safety/Safety of Machinery

Declaration of Conformity

Test Certificates

EHC



Type Examination Certificate





Special Test Certificate

Test Certificates

Marine / Shipping

Type Test Certificates/Test Report











Marine / Shipping other Railway **Dangerous Good**





Vibration and Shock **Transport Information** Confirmation Confirmation

Environment

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2038-1NP30

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2038-1NP30

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2038-1NP30


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2038-1NP30&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2038-1NP30/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2038-1NP30&objecttype=14&gridview=view1

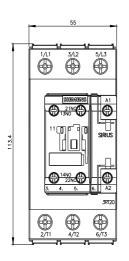






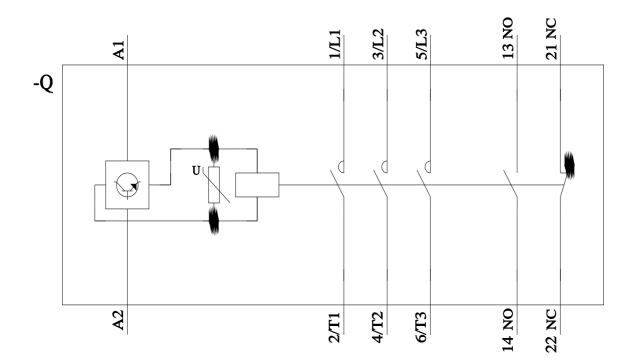

last modified:

8/15/2023

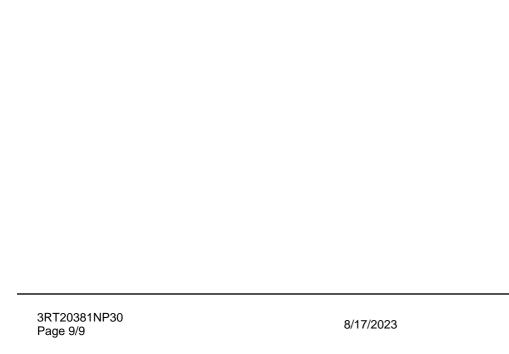

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20381NP30