SIEMENS

Data sheet 3RT2038-1NP34



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 175-280 V AC/DC, 50/60 Hz, with integrated varistor, auxiliary contacts: 2 NO + 2 NC, screw terminal, size: S2, removable auxiliary switch

| SIRIUS |
|--|
| Power contactor |
| 3RT2 |
| |
| S2 |
| |
| No |
| No |
| |
| 17.1 W |
| 5.7 W |
| 1 W |
| |
| 690 V |
| 690 V |
| |
| 6 kV |
| 6 kV |
| 400 V |
| |
| 6.1g / 5 ms, 3.7g / 10 ms |
| 6.1g / 5 ms, 3.7g / 10 ms |
| |
| 9.6g / 5 ms, 5.8g / 10 ms |
| 9.6g / 5 ms, 5.8g / 10 ms |
| |
| 10 000 000 |
| 5 000 000 |
| 10 000 000 |
| Q |
| 10/01/2014 |
| Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 |
| |
| 2 000 m |
| |
| -25 +60 °C |
| -55 +80 °C |
| |
| |

| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 % |
|--|--------------------|
| lain circuit | |
| number of poles for main current circuit | 3 |
| number of NO contacts for main contacts | 3 |
| operating voltage | |
| at AC-3 rated value maximum | 690 V |
| at AC-3e rated value maximum | 690 V |
| operational current | |
| at AC-1 at 400 V at ambient temperature 40 °C rated value | 90 A |
| • at AC-1 | |
| — up to 690 V at ambient temperature 40 °C rated value | 90 A |
| up to 690 V at ambient temperature 60 °C rated value | 80 A |
| • at AC-3 | |
| — at 400 V rated value | 80 A |
| — at 500 V rated value | 80 A |
| — at 690 V rated value | 58 A |
| • at AC-3e | |
| — at 400 V rated value | 80 A |
| — at 500 V rated value | 80 A |
| — at 690 V rated value | 58 A |
| • at AC-4 at 400 V rated value | 55 A |
| • at AC-5a up to 690 V rated value | 79.2 A |
| • at AC-5b up to 400 V rated value | 66.4 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=20 rated value | 70 A |
| — up to 400 V for current peak value n=20 rated value | 70 A |
| — up to 500 V for current peak value n=20 rated value | 70 A |
| — up to 690 V for current peak value n=20 rated value | 58 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=30 rated value | 46.7 A |
| — up to 400 V for current peak value n=30 rated value | 46.7 A |
| — up to 500 V for current peak value n=30 rated value | 46.7 A |
| — up to 690 V for current peak value n=30 rated value | 46.7 A |
| minimum cross-section in main circuit at maximum AC-1 rated value | 35 mm ² |
| operational current for approx. 200000 operating cycles at AC-4 | |
| at 400 V rated value | 30 A |
| at 690 V rated value | 24 A |
| operational current | |
| at 1 current path at DC-1 | |
| — at 24 V rated value | 55 A |
| — at 60 V rated value | 23 A |
| — at 110 V rated value | 4.5 A |
| — at 220 V rated value | 1A |
| — at 440 V rated value | 0.4 A |
| — at 440 V rated value — at 600 V rated value | 0.25 A |
| with 2 current paths in series at DC-1 | 0.2071 |
| — at 24 V rated value | 55 A |
| — at 24 V rated value — at 60 V rated value | 45 A |
| — at 60 V rated value — at 110 V rated value | 45 A |
| — at 110 V rated value — at 220 V rated value | 45 A |
| | |
| — at 440 V rated value | 1 A |
| — at 600 V rated value | 0.8 A |
| with 3 current paths in series at DC-1 at 24 V stand value. | EE A |
| — at 24 V rated value | 55 A |
| — at 60 V rated value | 55 A |
| — at 110 V rated value | 55 A |

| — at 220 V rated value | 45 A |
|---|---|
| — at 440 V rated value | 2.9 A |
| — at 600 V rated value | 1.4 A |
| at 1 current path at DC-3 at DC-5 | |
| — at 24 V rated value | 35 A |
| — at 60 V rated value | 6 A |
| — at 220 V rated value | 1 A |
| — at 440 V rated value | 0.1 A |
| — at 600 V rated value | |
| | 0.06 A |
| with 2 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 55 A |
| — at 60 V rated value | 45 A |
| — at 110 V rated value | 25 A |
| — at 220 V rated value | 5 A |
| — at 440 V rated value | 0.27 A |
| — at 600 V rated value | 0.16 A |
| with 3 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 55 A |
| — at 60 V rated value | 55 A |
| — at 110 V rated value | 55 A |
| — at 220 V rated value | 25 A |
| — at 440 V rated value | 0.6 A |
| — at 600 V rated value | 0.35 A |
| operating power | |
| at AC-2 at 400 V rated value | 37 kW |
| • at AC-3 | O AV |
| — at 230 V rated value | 22 kW |
| — at 400 V rated value | 37 kW |
| | |
| — at 500 V rated value | 37 kW |
| — at 690 V rated value | 45 kW |
| • at AC-3e | |
| — at 230 V rated value | 22 kW |
| — at 400 V rated value | 37 kW |
| — at 500 V rated value | 37 kW |
| — at 690 V rated value | 45 kW |
| operating power for approx. 200000 operating cycles at AC- | |
| 4 | 45.0 (20) |
| • at 400 V rated value | 15.8 kW |
| at 690 V rated value | 21.8 kW |
| operating apparent power at AC-6a | |
| up to 230 V for current peak value n=20 rated value | 27.8 kVA |
| up to 400 V for current peak value n=20 rated value | 48.4 kVA |
| up to 500 V for current peak value n=20 rated value | 60.6 kVA |
| • up to 690 V for current peak value n=20 rated value | 69.3 kVA |
| operating apparent power at AC-6a | |
| up to 230 V for current peak value n=30 rated value | 18.6 kVA |
| up to 400 V for current peak value n=30 rated value | 32.3 kVA |
| • up to 500 V for current peak value n=30 rated value | 40.4 kVA |
| • up to 690 V for current peak value n=30 rated value | 55.8 kVA |
| short-time withstand current in cold operating state up to | |
| 40 °C | |
| limited to 1 s switching at zero current maximum | 1 298 A; Use minimum cross-section acc. to AC-1 rated value |
| limited to 5 s switching at zero current maximum | 898 A; Use minimum cross-section acc. to AC-1 rated value |
| limited to 10 s switching at zero current maximum | 640 A; Use minimum cross-section acc. to AC-1 rated value |
| limited to 30 s switching at zero current maximum | 414 A; Use minimum cross-section acc. to AC-1 rated value |
| limited to 60 s switching at zero current maximum | 333 A; Use minimum cross-section acc. to AC-1 rated value |
| no-load switching frequency | |
| • at AC | 1 500 1/h |
| • at DC | 1 500 1/h |
| operating frequency | |
| • at AC-1 maximum | 700 1/h |
| | |

| at AC-2 maximum | 350 1/h |
|--|------------------|
| • at AC-3 maximum | 500 1/h |
| at AC-3e maximum | 500 1/h |
| at AC-4 maximum | 150 1/h |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| at 50 Hz rated value | 175 280 V |
| at 60 Hz rated value | 175 280 V |
| control supply voltage at DC | |
| rated value | 175 280 V |
| operating range factor control supply voltage rated value of | |
| magnet coil at DC | |
| • initial value | 0.8 |
| full-scale value | 1.1 |
| operating range factor control supply voltage rated value of magnet coil at AC | |
| • at 50 Hz | 0.8 1.1 |
| ● at 60 Hz | 0.8 1.1 |
| design of the surge suppressor | with varistor |
| inrush current peak | 5 A |
| duration of inrush current peak | 30 μs |
| locked-rotor current mean value | 0.2 A |
| locked-rotor current peak | 0.42 A |
| duration of locked-rotor current | 230 ms |
| holding current mean value | 6 mA |
| apparent pick-up power of magnet coil at AC | |
| at 50 Hz | 40 VA |
| ● at 60 Hz | 40 VA |
| apparent holding power | |
| at minimum rated control supply voltage at DC | 2 VA |
| at maximum rated control supply voltage at DC | 2 VA |
| apparent holding power | |
| at minimum rated control supply voltage at AC | |
| — at 50 Hz | 2 VA |
| — at 60 Hz | 2 VA |
| at maximum rated control supply voltage at AC | |
| — at 50 Hz | 2 VA |
| — at 60 Hz | 2 VA |
| apparent holding power of magnet coil at AC | |
| ● at 50 Hz | 2 VA |
| ● at 60 Hz | 2 VA |
| inductive power factor with the holding power of the coil | |
| • at 50 Hz | 0.95 |
| • at 60 Hz | 0.95 |
| closing power of magnet coil at DC | 23 W |
| holding power of magnet coil at DC | 1 W |
| closing delay | |
| • at AC | 35 110 ms |
| • at DC | 35 110 ms |
| opening delay | |
| • at AC | 30 55 ms |
| • at DC | 30 55 ms |
| arcing time | 10 20 ms |
| control version of the switch operating mechanism | Standard A1 - A2 |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts instantaneous contact | 2 |
| number of NO contacts for auxiliary contacts instantaneous contact | 2 |
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| | |

| at 230 V rated value | 6 A |
|--|---|
| at 400 V rated value | 3 A |
| at 500 V rated value | 2 A |
| at 690 V rated value | 1 A |
| operational current at DC-12 | |
| at 24 V rated value | 10 A |
| at 48 V rated value | 6 A |
| at 60 V rated value | 6 A |
| at 110 V rated value | 3 A |
| • at 125 V rated value | 2 A |
| at 220 V rated value | 1 A |
| at 600 V rated value | 0.15 A |
| operational current at DC-13 | |
| at 24 V rated value | 6 A |
| at 48 V rated value | 2 A |
| at 60 V rated value | 2 A |
| at 110 V rated value | 1 A |
| • at 125 V rated value | 0.9 A |
| • at 220 V rated value | 0.3 A |
| at 600 V rated value | 0.1 A |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| • at 480 V rated value | 65 A |
| at 600 V rated value | 62 A |
| yielded mechanical performance [hp] | |
| for single-phase AC motor | |
| — at 110/120 V rated value | 5 hp |
| — at 230 V rated value | 15 hp |
| for 3-phase AC motor | |
| — at 200/208 V rated value | 20 hp |
| — at 220/230 V rated value | 25 hp |
| — at 460/480 V rated value | 50 hp |
| — at 575/600 V rated value | 60 hp |
| contact rating of auxiliary contacts according to UL | A600 / Q600 |
| Short-circuit protection | |
| design of the fuse link | |
| for short-circuit protection of the main circuit | |
| — with type of coordination 1 required | gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA) |
| — with type of assignment 2 required | gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA) |
| for short-circuit protection of the auxiliary switch required | gG: 10 A (500 V, 1 kA) |
| Installation/ mounting/ dimensions | |
| mounting position | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| side-by-side mounting | Yes |
| height | 114 mm |
| width | 55 mm |
| depth | 174 mm |
| required spacing | |
| with side-by-side mounting | |
| — forwards | 10 mm |
| — upwards | 10 mm |
| — downwards | 10 mm |
| — at the side | 0 mm |
| for grounded parts | |
| — forwards | |
| | 10 mm |
| — upwards | 10 mm 10 mm |
| | |

| for live parts | |
|--|--|
| — forwards | 10 mm |
| — upwards | 10 mm |
| — downwards | 10 mm |
| — at the side | 6 mm |
| Connections/ Terminals | |
| type of electrical connection | |
| • for main current circuit | screw-type terminals |
| for auxiliary and control circuit | screw-type terminals |
| at contactor for auxiliary contacts | Screw-type terminals |
| of magnet coil | Screw-type terminals |
| type of connectable conductor cross-sections for main contacts | |
| solid or stranded | 2x (1 35 mm²), 1x (1 50 mm²) |
| finely stranded with core end processing | 2x (1 25 mm²), 1x (1 35 mm²) |
| connectable conductor cross-section for main contacts | |
| finely stranded with core end processing | 1 35 mm² |
| connectable conductor cross-section for auxiliary contacts | |
| solid or stranded | 0.5 2.5 mm² |
| finely stranded with core end processing | 0.5 2.5 mm² |
| type of connectable conductor cross-sections | |
| for auxiliary contacts | |
| — solid or stranded | 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |
| finely stranded with core end processing | 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |
| for AWG cables for auxiliary contacts | 2x (20 16), 2x (18 14) |
| AWG number as coded connectable conductor cross section | |
| • for main contacts | 18 1 |
| for auxiliary contacts | 20 14 |
| Safety related data | |
| product function | |
| mirror contact according to IEC 60947-4-1 | Yes |
| positively driven operation according to IEC 60947-5-1 | No |
| suitability for use safety-related switching OFF | Yes |
| B10 value with high demand rate according to SN 31920 | 1 000 000 |
| proportion of dangerous failures | |
| with low demand rate according to SN 31920 | 40 % |
| with high demand rate according to SN 31920 | 73 % |
| failure rate [FIT] with low demand rate according to SN 31920 | 100 FIT |
| T1 value for proof test interval or service life according to IEC 61508 | 20 a |
| protection class IP on the front according to IEC 60529 | IP20 |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
| Contification on provide | |

Certificates/ approvals

General Product Approval



Confirmation





<u>KC</u>



EMC

Functional Safety/Safety of Machinery

Declaration of Conformity

Test Certificates



Type Examination Certificate





Special Test Certificate

Type Test Certificates/Test Report

Marine / Shipping













Marine / Shipping other Railway **Dangerous Good Environment**



Vibration and Shock **Transport Information** Confirmation Confirmation

Environmental Con-<u>firmations</u>

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2038-1NP34

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2038-1NP34

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2038-1NP34

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2038-1NP34&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2038-1NP34/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2038-1NP34&objecttype=14&gridview=view1



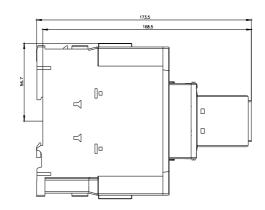



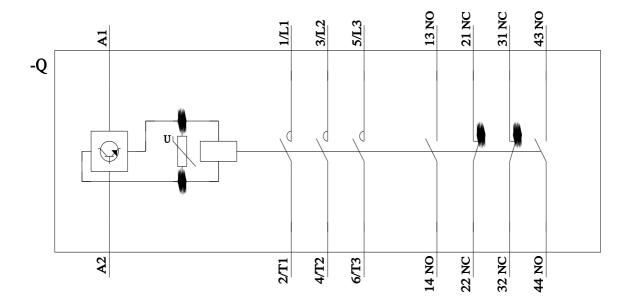

last modified: 8/15/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20381NP34