SIEMENS

Data sheet

3RT2038-3AG20



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 110 V AC, 50/60 Hz, auxiliary contacts: 1 NO + 1 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S2

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	17.1 W
 at AC in hot operating state per pole 	5.7 W
 without load current share typical 	6.5 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	11.8g / 5 ms, 7.4g / 10 ms
shock resistance with sine pulse	
• at AC	18.5g / 5 ms, 11.6g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
 during storage 	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
at AC-3 rated value maximum	690 V
 at AC-3e rated value maximum 	690 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated	90 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	90 A
— up to 690 V at ambient temperature 60 °C rated	80 A
value	
• at AC-3	
— at 400 V rated value	80 A
— at 500 V rated value	80 A
— at 690 V rated value	58 A
• at AC-3e	
— at 400 V rated value	80 A
— at 500 V rated value	80 A
— at 690 V rated value	58 A
at AC-4 at 400 V rated value	55 A
at AC-5a up to 690 V rated value	79.2 A
 at AC-5b up to 400 V rated value at AC-6a 	66.4 A
	70 A
— up to 230 V for current peak value n=20 rated value	
 — up to 400 V for current peak value n=20 rated value — up to 500 V for current peak value n=20 rated value 	70 A 70 A
— up to 500 V for current peak value n=20 rated value	58 A
• at AC-6a	50 A
 up to 230 V for current peak value n=30 rated value 	46.7 A
— up to 200 V for current peak value n=30 rated value	46.7 A
— up to 500 V for current peak value n=30 rated value	46.7 A
— up to 690 V for current peak value n=30 rated value	46.7 A
minimum cross-section in main circuit at maximum AC-1 rated	35 mm ²
value	
operational current for approx. 200000 operating cycles at AC-4	
at 400 V rated value	30 A
at 690 V rated value	24 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	23 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
• with 2 current paths in series at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
 with 3 current paths in series at DC-1 	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	45 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
 at 1 current path at DC-3 at DC-5 	


— at 24 V rated value	35 A
— at 60 V rated value	6 A
— at 220 V rated value	1 A
— at 440 V rated value	0.1 A
— at 600 V rated value	0.06 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	25 A
— at 220 V rated value	5 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	25 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.35 A
operating power	
• at AC-2 at 400 V rated value	37 kW
• at AC-3	
— at 230 V rated value	22 kW
— at 400 V rated value	37 kW
— at 500 V rated value	37 kW
— at 690 V rated value	45 kW
• at AC-3e	
— at 230 V rated value	22 kW
— at 400 V rated value	37 kW
— at 500 V rated value	37 kW
— at 690 V rated value	45 kW
operating power for approx. 200000 operating cycles at AC-	
4	
• at 400 V rated value	15.8 kW
at 690 V rated value	21.8 kW
operating apparent power at AC-6a	
 up to 230 V for current peak value n=20 rated value 	27.8 kVA
	48.4 kVA
 up to 400 V for current peak value n=20 rated value 	
• up to 500 V for current peak value n=20 rated value	60.6 kVA
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value 	60.6 kVA 69.3 kVA
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a	69.3 kVA
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value 	69.3 kVA 18.6 kVA
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value 	69.3 kVA 18.6 kVA 32.3 kVA
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 	69.3 kVA 18.6 kVA 32.3 kVA
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value 640 A; Use minimum cross-section acc. to AC-1 rated value
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value 640 A; Use minimum cross-section acc. to AC-1 rated value 414 A; Use minimum cross-section acc. to AC-1 rated value
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value 640 A; Use minimum cross-section acc. to AC-1 rated value
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value 640 A; Use minimum cross-section acc. to AC-1 rated value 414 A; Use minimum cross-section acc. to AC-1 rated value 333 A; Use minimum cross-section acc. to AC-1 rated value
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value 640 A; Use minimum cross-section acc. to AC-1 rated value 414 A; Use minimum cross-section acc. to AC-1 rated value
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC operating frequency at AC 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value 640 A; Use minimum cross-section acc. to AC-1 rated value 414 A; Use minimum cross-section acc. to AC-1 rated value 333 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC operating frequency at AC-1 maximum 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value 640 A; Use minimum cross-section acc. to AC-1 rated value 414 A; Use minimum cross-section acc. to AC-1 rated value 333 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 700 1/h
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC operating frequency at AC-1 maximum at AC-2 maximum 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value 640 A; Use minimum cross-section acc. to AC-1 rated value 414 A; Use minimum cross-section acc. to AC-1 rated value 333 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 700 1/h 350 1/h
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC operating frequency at AC-1 maximum at AC-2 maximum at AC-3 maximum 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value 640 A; Use minimum cross-section acc. to AC-1 rated value 414 A; Use minimum cross-section acc. to AC-1 rated value 333 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 700 1/h 350 1/h 500 1/h
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC operating frequency at AC-1 maximum at AC-3 maximum at AC-3 maximum at AC-3 maximum at AC-3 maximum 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value 640 A; Use minimum cross-section acc. to AC-1 rated value 414 A; Use minimum cross-section acc. to AC-1 rated value 333 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 700 1/h 500 1/h 500 1/h
 up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC operating frequency at AC-1 maximum at AC-2 maximum at AC-3 maximum 	69.3 kVA 18.6 kVA 32.3 kVA 40.4 kVA 55.8 kVA 1 298 A; Use minimum cross-section acc. to AC-1 rated value 898 A; Use minimum cross-section acc. to AC-1 rated value 640 A; Use minimum cross-section acc. to AC-1 rated value 414 A; Use minimum cross-section acc. to AC-1 rated value 333 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h 700 1/h 350 1/h 500 1/h


type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	110 V
at 60 Hz rated value	110 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
● at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	210 VA
● at 60 Hz	188 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.69
• at 60 Hz	0.65
apparent holding power of magnet coil at AC	
• at 50 Hz	17.2 VA
• at 60 Hz	16.5 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.36
• at 60 Hz	0.39
closing delay	
• at AC	10 80 ms
opening delay	
• at AC	10 18 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous	1
contact number of NO contacts for auxiliary contacts instantaneous	1
contact	
operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	10 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
at 690 V rated value	1 A
operational current at DC-12	
 at 24 V rated value 	10 A
 at 48 V rated value 	6 A
 at 60 V rated value 	6 A
 at 110 V rated value 	3 A
at 125 V rated value	2 A
at 220 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	
at 24 V rated value	10 A
at 48 V rated value	2 A
at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	65 A
• at 600 V rated value	62 A
yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	5 hp

— at 230 V rated value	15 hp
• for 3-phase AC motor	
— at 200/208 V rated value	20 hp
— at 220/230 V rated value	25 hp
— at 460/480 V rated value	50 hp
— at 575/600 V rated value	60 hp
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
 for short-circuit protection of the main circuit 	
— with type of coordination 1 required	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)
 — with type of assignment 2 required 	gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA)
 for short-circuit protection of the auxiliary switch required 	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	114 mm
width	55 mm
depth	130 mm
required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
	0 mm
for grounded parts	10
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
 for live parts 	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
 for auxiliary and control circuit 	spring-loaded terminals
 at contactor for auxiliary contacts 	Spring-type terminals
of magnet coil	Spring-type terminals
type of connectable conductor cross-sections for main contacts	
solid or stranded	2x (1 35 mm²), 1x (1 50 mm²)
 finely stranded with core end processing 	2x (1 25 mm²), 1x (1 35 mm²)
connectable conductor cross-section for main contacts	
 finely stranded with core end processing 	1 35 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 2.5 mm²
 finely stranded with core end processing 	0.5 1.5 mm ²
 finely stranded without core end processing 	0.5 2.5 mm ²
type of connectable conductor cross-sections	
for auxiliary contacts	
- solid or stranded	2x (0.5 2.5 mm²)
	2x (0.5 2.5 mm ²) 2x (0.5 1.5 mm ²)
 finely stranded with core end processing finely stranded without core and processing 	
 finely stranded without core end processing for AWC cobles for auxiliant contacts 	2x (0.5 2.5 mm ²)
for AWG cables for auxiliary contacts	2x (20 14)
AWG number as coded connectable conductor cross section	

• for main contact			4		
 for auxiliary con 			1 14		
afety related data		20	14		
-		_			
product function	coording to IEC 60047.4.1	Ye	0		
	ccording to IEC 60947-4-1				
	operation according to IE	2 60947-5-1 NO Ye			
	ty-related switching OFF		-		
	emand rate according to SN	10	000 000		
proportion of danger			0/		
	d rate according to SN 319				
	nd rate according to SN 31				
	ow demand rate according		0 FIT		
61508	interval or service life acco	ording to IEC 20	а		
	n the front according to I	EC 60529 IP2	20		
-	the front according to IEC		ger-safe, for vertical contact	from the front	
ertificates/ approvals			,		
General Product Ap					
General Product App	provar				
		Confirmation	\sim	KC	
(SD	(m)		(Uı)		FHI
					ENL
CSA	ccc		UL		
	Functional				
EMC	Safety/Safety of Ma-	Declaration of Conf	ormity	Test Certificates	
	chinery				
-					
A	Type Examination Cer- tificate	UK	~ ~	<u>Type Test Certific-</u> ates/Test Report	Special Test Certific
AVA -	lincate		(–	ales/ rest Report	<u>ate</u>
\sim					
RCM			EG-Konf.		
Marine / Shipping					
		Å.t.	Lloyds	(And a state of the state of th	ALE
		ĴÅ	Lloyd's Register	(3)	
ABS			Lloyd's Register	PRS	RINA
ABS	BUREAU VERITAS		Lloyd's Register us	PRS	RINA
ABS	BUREAU VERITAS		Lloyd's Register us	PRS	RINA
ABS	BUREAU VERITAS		Lloyds LRS	PRS Dangerous Good	RINA Environment
ABS	BUREAU VERITAS		us	PRS Dangerous Good	RINA Environment
ABS	DUREAU VERITAS other <u>Confirmation</u>	Confirmation	us	Dangerous Good	Environmental Con
ABS		Confirmation	LIIS	-	
ABS		Confirmation	LIIS	-	Environmental Cor
Marine / Shipping		Confirmation	LIIS	-	Environmental Cor
Marine / Shipping		Confirmation	LIIS	-	Environmental Cor
RMRS		Confirmation	LIIS	-	Environmental Cor
RMRS RMRS	Confirmation		LIIS	-	Environmental Cor
Inther information		ket (see here).	Railway Vibration and Shock	-	Environmental Cor
urther information Siemens has decided https://press.siemens.si Siemens is working of	Confirmation d to exit the Russian mar com/global/en/pressrelease on the renewal of the curr	ket (see here). e/siemens-wind-down-ru	Railway Vibration and Shock	Transport Information	Environmental Con firmations
urther information Siemens has decided https://press.siemens.s Siemens is working of Please contact your lo	Confirmation d to exit the Russian mar com/global/en/pressrelease on the renewal of the cur cal Siemens office on the s	ket (see here). e/siemens-wind-down-ru rent EAC certificates. status of validity of the E	Railway Vibration and Shock	Transport Information	Environmental Con firmations
urther information Siemens has decided https://press.siemens. Siemens is working of Please contact your lo EAC relevant market (Confirmation d to exit the Russian mar com/global/en/pressrelease on the renewal of the cur cal Siemens office on the s other than the sanctioned I	ket (see here). e/siemens-wind-down-ru rent EAC certificates. status of validity of the E	Railway Vibration and Shock	Transport Information	Environmental Con firmations
urther information Siemens has decided https://press.siemens.si Siemens is working of Please contact your lo EAC relevant market (Information on the pa https://support.industry	Confirmation d to exit the Russian mar com/global/en/pressrelease on the renewal of the cur cal Siemens office on the s other than the sanctioned l ackaging y.siemens.com/cs/ww/en/vi	ket (see here). <u>Sisiemens-wind-down-ru</u> rent EAC certificates. status of validity of the E EAEU member states R <u>ew/109813875</u>	Railway Vibration and Shock	Transport Information	Environmental Con firmations
urther information Siemens has decided https://press.siemens. Siemens is working of Please contact your lo EAC relevant market (Information on the pa https://support.industry Information- and Dow	Confirmation d to exit the Russian mark com/global/en/pressrelease on the renewal of the curr cal Siemens office on the s other than the sanctioned I ackaging y siemens.com/cs/ww/en/vi wnloadcenter (Catalogs, I	ket (see here). <u>Sisiemens-wind-down-ru</u> rent EAC certificates. status of validity of the E EAEU member states R <u>ew/109813875</u>	Railway Vibration and Shock	Transport Information	Environmental Con firmations
urther information Siemens has decided https://press.siemens. Siemens is working of Please contact your lo EAC relevant market (Information on the pa https://support.industry Information- and Dow https://www.siemens.co	Confirmation d to exit the Russian mark com/global/en/pressrelease on the renewal of the cur cal Siemens office on the s other than the sanctioned I ackaging y siemens.com/cs/ww/en/vi wnloadcenter (Catalogs, I com/ic10	ket (see here). <u>Sisiemens-wind-down-ru</u> rent EAC certificates. status of validity of the E EAEU member states R <u>ew/109813875</u>	Railway Vibration and Shock	Transport Information	Environmental Con firmations
urther information Siemens has decided https://press.siemens. Siemens is working of Please contact your lo EAC relevant market (Information on the path https://support.industry Information- and Dow https://www.siemens.co Industry Mall (Online	Confirmation d to exit the Russian mark com/global/en/pressrelease on the renewal of the curr cal Siemens office on the s other than the sanctioned I ackaging y.siemens.com/cs/ww/en/vi wnloadcenter (Catalogs, I com/ic10 ordering system)	ket (see here). <u>s/siemens-wind-down-m</u> rent EAC certificates. status of validity of the E EAEU member states R <u>ew/109813875</u> Brochures,)	Railway Vibration and Shock	Transport Information	Environmental Con firmations
urther information Siemens has decided https://press.siemens. Siemens is working of Please contact your lo EAC relevant market (Information on the pa https://support.industry Information- and Dow https://www.siemens.co Industry Mall (Online https://mall.industry.sie Cax online generator	Confirmation d to exit the Russian mark com/global/en/pressrelease on the renewal of the curr cal Siemens office on the s other than the sanctioned I ackaging y.siemens.com/cs/ww/en/vi wnloadcenter (Catalogs, I com/ic10 o ordering system) emens.com/mall/en/en/Cat	ket (see here). <u>e/siemens-wind-down-re</u> rent EAC certificates. tatus of validity of the E EAEU member states R <u>ew/109813875</u> Brochures,) alog/product?mlfb=3RT	Railway Vibration and Shock ussian-business AC certification if you intendussia or Belarus). 2038-3AG20	Transport Information	Environmental Con firmations
urther information Siemens has decided https://press.siemens. Siemens is working of Please contact your lo EAC relevant market (Information on the pa https://support.industry Information- and Dow https://www.siemens.co Industry Mall (Online https://mall.industry.sie Cax online generator http://support.automat	Confirmation d to exit the Russian mari- com/global/en/pressrelease on the renewal of the curr cal Siemens office on the s other than the sanctioned I ackaging y.siemens.com/cs/ww/en/vi wnloadcenter (Catalogs, I com/ic10 e ordering system) emens.com/mall/en/en/Cat ion.siemens.com/WW/CAX	ket (see here). <u>e/siemens-wind-down-re</u> rent EAC certificates. tatus of validity of the E EAEU member states R <u>ew/109813875</u> Brochures,) alog/product?mlfb=3RT iorder/default.aspx?lang	Railway Vibration and Shock	Transport Information	Environmental Con firmations
urther information Siemens has decided https://press.siemens. Siemens is working of Please contact your lo EAC relevant market (Information on the pr https://support.industry Information- and Dow https://www.siemens.co Industry Mall (Online https://mall.industry.sig Cax online generator http://support.automat Service&Support (Ma	Confirmation d to exit the Russian mari com/global/en/pressrelease on the renewal of the curr cal Siemens office on the so other than the sanctioned I ackaging v.siemens.com/cs/ww/en/vi wnloadcenter (Catalogs, I com/ic10 o ordering system) emens.com/mall/en/en/Cat com.siemens.com/WW/CAX	ket (see here). e/siemens-wind-down-m rent EAC certificates. tatus of validity of the E EAEU member states R ew/109813875 Brochures,) alog/product?mlfb=3RT corder/default.aspx?lang acteristics, FAQs,)	Railway Vibration and Shock ussian-business AC certification if you intendussia or Belarus). 2038-3AG20	Transport Information	Environmental Con firmations
urther information Siemens has decided https://press.siemens. Siemens is working of Please contact your lo EAC relevant market (Information - and Dow https://www.siemens.co Information- and Dow https://www.siemens.co Industry Mall (Online https://mall.industry.sie Cax online generator http://support.automatt Service&Support (Ma https://support.industry	Confirmation d to exit the Russian mari com/global/en/pressrelease on the renewal of the curr cal Siemens office on the so other than the sanctioned I ackaging v.siemens.com/cs/ww/en/vi wnloadcenter (Catalogs, I com/ic10 o ordering system) emens.com/mall/en/en/Cat com.siemens.com/WW/CAX anuals, Certificates, Char v.siemens.com/cs/ww/en/p	ket (see here). e/siemens-wind-down-m rent EAC certificates. tatus of validity of the E EAEU member states R ew/109813875 Brochures,) alog/product?mlfb=3RT forder/default.aspx?lang acteristics, FAQs,) s/3RT2038-3AG20	Railway Vibration and Shock ussian-business AC certification if you intendusia or Belarus). 2038-3AG20 g=en&mlfb=3RT2038-3AG2	Transport Information d to import or offer to supp	Environmental Con firmations
Extension of the provided states of the provi	Confirmation d to exit the Russian mari com/global/en/pressrelease on the renewal of the curr cal Siemens office on the so other than the sanctioned I ackaging v.siemens.com/cs/ww/en/vi wnloadcenter (Catalogs, I com/ic10 o ordering system) emens.com/mall/en/en/Cat com.siemens.com/WW/CAX anuals, Certificates, Char v.siemens.com/cs/ww/en/p	ket (see here). e/siemens-wind-down-rr rent EAC certificates. tatus of validity of the E EAEU member states R ew/109813875 Brochures,) alog/product?mlfb=3RT corder/default.aspx?lang acteristics, FAQs,) s/3RT2038-3AG20 on drawings, 3D mode	Railway Vibration and Shock Ussian-business AC certification if you intendussia or Belarus). 2038-3AG20 g=en&mlfb=3RT2038-3AG2 els, device circuit diagram	Transport Information d to import or offer to supp	Environmental Cor firmations
urther information Siemens has decided https://press.siemens.i. Siemens is working d Please contact your lo EAC relevant market (Information on the pr https://support.industry Information - and Dow https://www.siemens.co Industry Mall (Online https://mall.industry.sie Cax online generator http://support.automat Service&Support (Ma https://support.industry Image database (pro	Confirmation d to exit the Russian mari com/global/en/pressrelease on the renewal of the curri cal Siemens office on the so other than the sanctioned I ackaging y siemens.com/cs/ww/en/vi wnloadcenter (Catalogs, I com/ic10 e ordering system) emens.com/mall/en/en/Cat r ion.siemens.com/WW/CAX anuals, Certificates, Char y siemens.com/cs/ww/en/p duct images, 2D dimensio	ket (see here). e/siemens-wind-down-rr rent EAC certificates. tatus of validity of the E EAEU member states R ew/109813875 Brochures,) alog/product?mlfb=3RT corder/default.aspx?lang acteristics, FAQs,) s/3RT2038-3AG20 on drawings, 3D mode	Railway Vibration and Shock Ussian-business AC certification if you intendussia or Belarus). 2038-3AG20 g=en&mlfb=3RT2038-3AG2 els, device circuit diagram	Transport Information d to import or offer to supp	Environmental Con firmations

Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RT2038-3AG20/char Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2038-3AG20&objecttype=14&gridview=view1

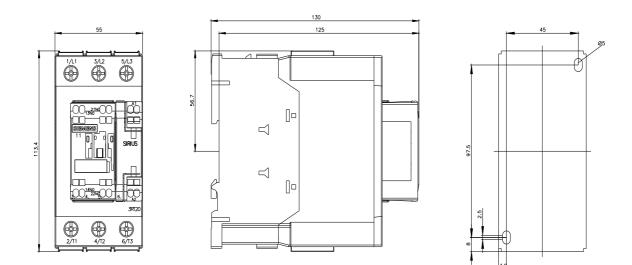

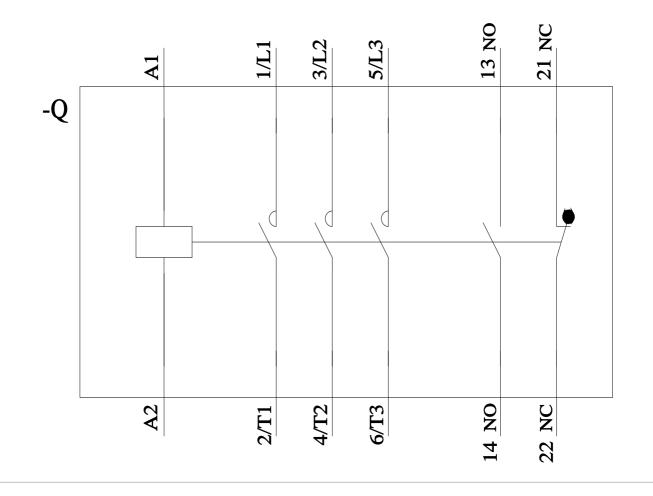

last modified:

8/15/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RT20383AG20