SIEMENS

Data sheet 3RT2038-3AL20



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 230 V AC, 50/60 Hz, auxiliary contacts: 1 NO + 1 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S2

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	17.1 W
 at AC in hot operating state per pole 	5.7 W
without load current share typical	6.5 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	11.8g / 5 ms, 7.4g / 10 ms
shock resistance with sine pulse	
• at AC	18.5g / 5 ms, 11.6g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

3
690 V
690 V
90 A
90 A
80 A
80 A
80 A
58 A
80 A
80 A
58 A
55 A
79.2 A
66.4 A
70 A
70 A
70 A
58 A
46.7 A
46.7 A
46.7 A
46.7 A
35 mm²
30 A
24 A
55 A
23 A
4.5 A
4.5 A 1 A
1 A
1 A 0.4 A
1 A 0.4 A
1 A 0.4 A 0.25 A
1 A 0.4 A 0.25 A 55 A 45 A
1 A 0.4 A 0.25 A 55 A 45 A
1 A 0.4 A 0.25 A 55 A 45 A 45 A 5 A
1 A 0.4 A 0.25 A 55 A 45 A 45 A 5 A 1 A
1 A 0.4 A 0.25 A 55 A 45 A 45 A 5 A
1 A 0.4 A 0.25 A 55 A 45 A 45 A 5 A 1 A 0.8 A
1 A 0.4 A 0.25 A 55 A 45 A 45 A 5 A 1 A 0.8 A
1 A 0.4 A 0.25 A 55 A 45 A 45 A 5 A 1 A 0.8 A
1 A 0.4 A 0.25 A 55 A 45 A 45 A 1 A 0.8 A
1 A 0.4 A 0.25 A 55 A 45 A 5 A 1 A 0.8 A 55 A 55 A 55 A 55 A
1 A 0.4 A 0.25 A 55 A 45 A 45 A 5 A 1 A 0.8 A

1041/	05.4				
— at 24 V rated value	35 A				
— at 60 V rated value	6 A				
— at 220 V rated value	1A				
— at 440 V rated value	0.1 A				
— at 600 V rated value	0.06 A				
 with 2 current paths in series at DC-3 at DC-5 					
— at 24 V rated value	55 A				
— at 60 V rated value	45 A				
— at 110 V rated value	25 A				
— at 220 V rated value	5 A				
— at 440 V rated value	0.27 A				
— at 600 V rated value	0.16 A				
 with 3 current paths in series at DC-3 at DC-5 					
— at 24 V rated value	55 A				
— at 60 V rated value	55 A				
— at 110 V rated value	55 A				
— at 220 V rated value	25 A				
— at 440 V rated value	0.6 A				
— at 600 V rated value	0.35 A				
operating power					
at AC-2 at 400 V rated value	37 kW				
• at AC-3					
— at 230 V rated value	22 kW				
— at 400 V rated value	37 kW				
— at 500 V rated value	37 kW				
— at 690 V rated value	45 kW				
	40 KVV				
• at AC-3e	22 144				
— at 230 V rated value	22 kW				
— at 400 V rated value	37 kW				
— at 500 V rated value	37 kW				
— at 690 V rated value	45 kW				
operating power for approx. 200000 operating cycles at AC-					
at 400 V rated value	15.8 kW				
at 490 V rated value at 690 V rated value	21.8 kW				
operating apparent power at AC-6a	21.0 KW				
• up to 230 V for current peak value n=20 rated value	27.8 kVA				
	48.4 kVA				
up to 400 V for current peak value n=20 rated value					
up to 500 V for current peak value n=20 rated value	60.6 kVA				
up to 690 V for current peak value n=20 rated value	69.3 kVA				
operating apparent power at AC-6a	40.0 13/4				
• up to 230 V for current peak value n=30 rated value	18.6 kVA				
• up to 400 V for current peak value n=30 rated value	32.3 kVA				
 up to 500 V for current peak value n=30 rated value 	40.4 kVA				
• up to 690 V for current peak value n=30 rated value	55.8 kVA				
short-time withstand current in cold operating state up to 40 °C					
	1.208 A: Use minimum cross section acc. to AC 1 rated value				
Iimited to 1 s switching at zero current maximum	1 298 A; Use minimum cross-section acc. to AC-1 rated value				
Ilmited to 5 s switching at zero current maximum	898 A; Use minimum cross-section acc. to AC-1 rated value				
Ilimited to 10 s switching at zero current maximum	640 A; Use minimum cross-section acc. to AC-1 rated value				
Iimited to 30 s switching at zero current maximum	414 A; Use minimum cross-section acc. to AC-1 rated value				
Iimited to 60 s switching at zero current maximum	333 A; Use minimum cross-section acc. to AC-1 rated value				
no-load switching frequency					
• at AC	5 000 1/h				
operating frequency					
• at AC-1 maximum	700 1/h				
• at AC-2 maximum	350 1/h				
• at AC-3 maximum	500 1/h				
1.40.0	500 1/h				
at AC-3e maximum					
at AC-3e maximumat AC-4 maximum	150 1/h				

type of voltage of the control supply voltage	AC			
control supply voltage at AC				
at 50 Hz rated value	230 V			
at 60 Hz rated value	230 V 230 V			
operating range factor control supply voltage rated value of	230 V			
magnet coil at AC				
● at 50 Hz	0.8 1.1			
● at 60 Hz	0.85 1.1			
apparent pick-up power of magnet coil at AC				
• at 50 Hz	210 VA			
● at 60 Hz	188 VA			
inductive power factor with closing power of the coil				
at 50 Hz	0.69			
● at 60 Hz	0.65			
apparent holding power of magnet coil at AC				
• at 50 Hz	17.2 VA			
• at 60 Hz	16.5 VA			
inductive power factor with the holding power of the coil				
• at 50 Hz	0.36			
• at 60 Hz	0.39			
closing delay				
• at AC	10 80 ms			
opening delay				
• at AC	10 18 ms			
arcing time	10 20 ms			
control version of the switch operating mechanism	Standard A1 - A2			
Auxiliary circuit				
number of NC contacts for auxiliary contacts instantaneous	1			
contact				
number of NO contacts for auxiliary contacts instantaneous contact	1			
operational current at AC-12 maximum	10 A			
operational current at AC-15				
operational current at AC-15 • at 230 V rated value	10 A			
•	10 A 3 A			
 at 230 V rated value at 400 V rated value at 500 V rated value 	3 A 2 A			
at 230 V rated valueat 400 V rated value	3 A			
 at 230 V rated value at 400 V rated value at 500 V rated value 	3 A 2 A			
 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value 	3 A 2 A			
 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value 	3 A 2 A 1 A 10 A 6 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 60 V rated value	3 A 2 A 1 A 10 A 6 A 6 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A			
 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A			
 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 600 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 48 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 10 A 2 A 1 A 0.15 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 600 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 48 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 10 A 2 A 1 A 0.15 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 110 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 220 V rated value at 600 V rated value at 110 V rated value at 125 V rated value at 148 V rated value at 150 V rated value at 110 V rated value at 110 V rated value at 110 V rated value at 115 V rated value at 125 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value at 24 V rated value at 25 V rated value at 26 V rated value at 27 V rated value at 28 V rated value at 29 V rated value at 29 V rated value at 20 V rated value at 20 V rated value at 60 V rated value at 60 V rated value at 60 V rated value at 125 V rated value at 126 V rated value at 600 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 25 V rated value at 24 V rated value at 25 V rated value at 25 V rated value at 25 V rated value at 26 V rated value at 27 V rated value at 28 V rated value at 29 V rated value at 20 V rated value at 20 V rated value at 20 V rated value at 600 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value at 24 V rated value at 25 V rated value at 26 V rated value at 27 V rated value at 28 V rated value at 29 V rated value at 29 V rated value at 20 V rated value at 20 V rated value at 60 V rated value at 60 V rated value at 60 V rated value at 125 V rated value at 126 V rated value at 600 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 48 V rated value at 110 V rated value at 600 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 125 V rated value at 148 V rated value at 150 V rated value at 600 V rated value at 600 V rated value at 600 V rated value at 125 V rated value at 600 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 48 V rated value at 60 V rated value at 125 V rated value at 126 V rated value at 600 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 8 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 25 V rated value at 600 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 480 V rated value at 600 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 8 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)			
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 48 V rated value at 600 V rated value at 48 V rated value at 48 V rated value at 600 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 480 V rated value at 600 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 8 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)			

— at 230 V rated value	15 hp				
• for 3-phase AC motor					
— at 200/208 V rated value	20 hp				
— at 220/230 V rated value	25 hp				
— at 460/480 V rated value	50 hp				
— at 575/600 V rated value	60 hp				
contact rating of auxiliary contacts according to UL	A600 / P600				
Short-circuit protection					
design of the fuse link					
 for short-circuit protection of the main circuit 					
— with type of coordination 1 required	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)				
— with type of assignment 2 required	gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA)				
 for short-circuit protection of the auxiliary switch required 	gG: 10 A (500 V, 1 kA)				
Installation/ mounting/ dimensions					
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface				
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715				
side-by-side mounting	Yes				
height	114 mm				
width	55 mm				
depth	130 mm				
required spacing					
with side-by-side mounting					
— forwards	10 mm				
— upwards	10 mm				
— downwards	10 mm				
— at the side	0 mm				
for grounded parts	O THILL				
— forwards	10 mm				
	10 mm				
— upwards	6 mm				
— at the side — downwards					
	10 mm				
• for live parts	10 mm				
— forwards					
— upwards	10 mm				
— downwards	10 mm				
— at the side	6 mm				
Connections/ Terminals					
type of electrical connection					
for main current circuit	screw-type terminals				
 for auxiliary and control circuit 	spring-loaded terminals				
 at contactor for auxiliary contacts 	Spring-type terminals				
of magnet coil	Spring-type terminals				
type of connectable conductor cross-sections for main contacts					
solid or stranded	2x (1 35 mm²), 1x (1 50 mm²)				
finely stranded with core end processing	2x (1 25 mm²), 1x (1 35 mm²)				
connectable conductor cross-section for main contacts					
finely stranded with core end processing	1 35 mm²				
connectable conductor cross-section for auxiliary contacts					
solid or stranded	0.5 2.5 mm²				
 finely stranded with core end processing 	0.5 1.5 mm²				
 finely stranded without core end processing 	0.5 2.5 mm²				
type of connectable conductor cross-sections					
• for auxiliary contacts					
— solid or stranded	2x (0.5 2.5 mm²)				
 finely stranded with core end processing 	2x (0.5 1.5 mm²)				
finely stranded without core end processing	2x (0.5 2.5 mm²)				
for AWG cables for auxiliary contacts	2x (20 14)				
AWG number as coded connectable conductor cross					
section					

• for main contacts	18 1
 for auxiliary contacts 	20 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 positively driven operation according to IEC 60947-5-1 	No
suitability for use safety-related switching OFF	Yes
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Certificates/ approvals	

Certificates/ approvals

General Product Approval





Confirmation



<u>KC</u>





Type Examination Certificate





Special Test Certificate

Type Test Certificates/Test Report

Marine / Shipping













Marine / Shipping	other	Railway	Dangerous Good	Environment



Confirmation

Confirmation

Vibration and Shock

Transport Information

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2038-3AL20

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2038-3AL20


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT2038-3AL20


 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2038-3AL20&lang=en

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2038-3AL20&objecttype=14&gridview=view1







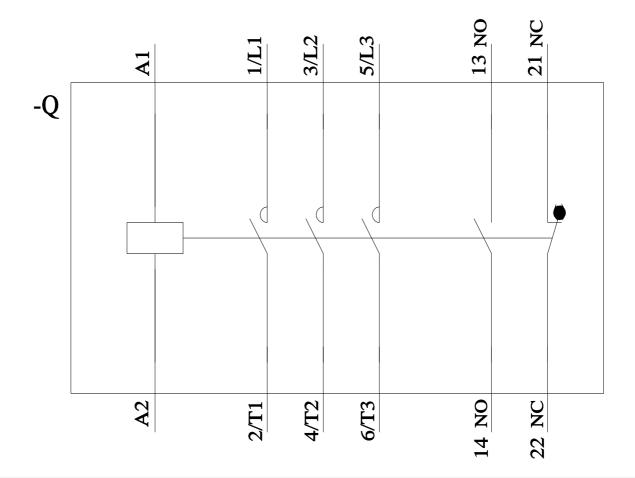

last modified: 8/15/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20383AL20