SIEMENS

Data sheet 3RT2045-1AP04



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 230 V AC, 50 Hz, auxiliary contacts: 2 NO + 2 NC, screw terminal, size: S3, removable auxiliary switch

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S3
product extension	
 function module for communication 	No
 auxiliary switch 	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	15.9 W
 at AC in hot operating state per pole 	5.3 W
 without load current share typical 	7.3 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	1 000 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	8 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	10.3g / 5 ms, 6,.g / 10 ms
shock resistance with sine pulse	
• at AC	16.3g / 5 ms, 10.g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
 at AC-3 rated value maximum 	1 000 V
• at AC-3e rated value maximum	1 000 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated	125 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated	125 A
value	
 up to 690 V at ambient temperature 60 °C rated value 	105 A
• at AC-3	
— at 400 V rated value	80 A
— at 500 V rated value	80 A
— at 690 V rated value	58 A
— at 1000 V rated value	30 A
• at AC-3e	30 A
	90 A
— at 400 V rated value	80 A 80 A
— at 500 V rated value	
— at 690 V rated value	58 A
— at 1000 V rated value	30 A
• at AC-4 at 400 V rated value	66 A
• at AC-5a up to 690 V rated value	110 A
at AC-5b up to 400 V rated value	80 A
• at AC-6a	
 up to 230 V for current peak value n=20 rated value 	80 A
 up to 400 V for current peak value n=20 rated value 	80 A
 up to 500 V for current peak value n=20 rated value 	80 A
 up to 690 V for current peak value n=20 rated value 	58 A
• at AC-6a	
 up to 230 V for current peak value n=30 rated value 	54 A
 up to 400 V for current peak value n=30 rated value 	54 A
 up to 500 V for current peak value n=30 rated value 	54 A
 up to 690 V for current peak value n=30 rated value 	54 A
minimum cross-section in main circuit at maximum AC-1 rated	50 mm ²
value operational current for approx. 200000 operating cycles at	
AC-4	
• at 400 V rated value	34 A
• at 690 V rated value	24 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	60 A
— at 110 V rated value	9 A
— at 220 V rated value	2 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.4 A
with 2 current paths in series at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
	10 A
— at 220 V rated value	
— at 440 V rated value	1.8 A
— at 600 V rated value	1 A
with 3 current paths in series at DC-1	400 A
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	80 A
— at 440 V rated value	4.5 A

— at 600 V rated value	2.6 A		
• at 1 current path at DC-3 at DC-5			
— at 24 V rated value	40 A		
— at 60 V rated value	6 A		
— at 110 V rated value	2.5 A		
— at 220 V rated value	1 A		
— at 440 V rated value	0.15 A		
— at 600 V rated value	0.06 A		
 with 2 current paths in series at DC-3 at DC-5 			
— at 24 V rated value	100 A		
— at 60 V rated value	100 A		
— at 110 V rated value	100 A		
— at 220 V rated value	7 A		
— at 440 V rated value	0.42 A		
— at 600 V rated value	0.16 A		
 with 3 current paths in series at DC-3 at DC-5 			
— at 24 V rated value	100 A		
— at 60 V rated value	100 A		
— at 110 V rated value	100 A		
— at 220 V rated value	35 A		
— at 440 V rated value	0.8 A		
— at 600 V rated value	0.35 A		
operating power			
 at AC-2 at 400 V rated value 	37 kW		
• at AC-3			
— at 230 V rated value	22 kW		
— at 400 V rated value	37 kW		
— at 500 V rated value	45 kW		
— at 690 V rated value	55 kW		
— at 1000 V rated value	37 kW		
• at AC-3e			
— at 230 V rated value	22 kW		
— at 400 V rated value	37 kW		
— at 500 V rated value	45 kW		
— at 690 V rated value	55 kW		
— at 1000 V rated value	37 kW		
operating power for approx. 200000 operating cycles at AC-			
at 400 V rated value	17.9 kW		
at 690 V rated value	21.8 kW		
operating apparent power at AC-6a			
up to 230 V for current peak value n=20 rated value	31 kVA		
• up to 400 V for current peak value n=20 rated value	55 kVA		
 up to 500 V for current peak value n=20 rated value 	69 kVA		
 up to 690 V for current peak value n=20 rated value 	69 kVA		
operating apparent power at AC-6a			
up to 230 V for current peak value n=30 rated value	21.5 kVA		
 up to 400 V for current peak value n=30 rated value 	37.4 kVA		
 up to 500 V for current peak value n=30 rated value 	46.7 kVA		
 up to 690 V for current peak value n=30 rated value 	64.5 kVA		
short-time withstand current in cold operating state up to 40 °C			
	1 500 A: Use minimum cross section acc. to AC 1 rated value		
limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum.	1 500 A; Use minimum cross-section acc. to AC-1 rated value		
limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum	1 186 A; Use minimum cross-section acc. to AC-1 rated value		
limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum	851 A; Use minimum cross-section acc. to AC-1 rated value		
limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum	538 A; Use minimum cross-section acc. to AC-1 rated value		
Iimited to 60 s switching at zero current maximum Poleod switching frequency	423 A; Use minimum cross-section acc. to AC-1 rated value		
no-load switching frequency	5 000 1/h		
• at AC	5 000 1/h		
operating frequency	000 1/b		
• at AC-1 maximum	900 1/h		

• at AC-2 maximum	400 1/h
• at AC-3 maximum	1 000 1/h
• at AC-3e maximum	1 000 1/h
at AC-4 maximum	300 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	230 V
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC • at 50 Hz	296 VA
inductive power factor with closing power of the coil	250 VA
at 50 Hz	0.61
	0:61
apparent holding power of magnet coil at AC	40.1/4
• at 50 Hz	19 VA
inductive power factor with the holding power of the coil	0.00
• at 50 Hz	0.38
closing delay	
• at AC	13 50 ms
opening delay	
• at AC	10 21 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	2
number of NO contacts for auxiliary contacts instantaneous contact	2
operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1A
operational current at DC-12	
• at 24 V rated value	10 A
• at 48 V rated value	6 A
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
• at 220 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	
at 24 V rated value	6 A
at 48 V rated value	2 A
at 40 V rated value at 60 V rated value	2 A
at 100 V rated value at 110 V rated value	1 A
at 110 V rated value at 125 V rated value	0.9 A
at 220 V rated value at 600 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	77 A
at 600 V rated value	62 A
yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	7.5 hp
— at 230 V rated value	15 hp

• for 3-phase AC motor		
— at 200/208 V rated value	25 hp	
— at 220/230 V rated value	30 hp	
— at 460/480 V rated value	60 hp	
— at 575/600 V rated value	60 hp	
contact rating of auxiliary contacts according to UL	A600 / P600	
Short-circuit protection		
design of the fuse link		
for short-circuit protection of the main circuit		
— with type of coordination 1 required	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)	
 — with type of assignment 2 required 	gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA)	
• for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)	
Installation/ mounting/ dimensions		
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface	
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715	
side-by-side mounting	Yes	
height	140 mm	
width	70 mm	
depth	195 mm	
required spacing		
with side-by-side mounting		
— forwards	20 mm	
— upwards	10 mm	
— downwards	10 mm	
— at the side	0 mm	
for grounded parts		
— forwards	20 mm	
— upwards	10 mm	
— at the side	10 mm	
— downwards	10 mm	
• for live parts		
— forwards	20 mm	
— upwards	10 mm	
— downwards	10 mm	
— at the side	10 mm	
Connections/ Terminals	10 mm	
type of electrical connection		
•	across has a formal and	
for main current circuit for auxiliany and control circuit	screw-type terminals	
for auxiliary and control circuit act contactor for auxiliary contactor	screw-type terminals	
at contactor for auxiliary contacts of magnet sell.	Screw-type terminals	
of magnet coil	Screw-type terminals	
type of connectable conductor cross-sections for main contacts	0: (0.5 - 0.5 mm²) 4: (0.5 - 50 - 2)	
finely stranded with core end processing	2x (2.5 35 mm²), 1x (2.5 50 mm²)	
connectable conductor cross-section for main contacts	0.5 40 3	
• solid	2.5 16 mm ²	
• stranded	6 70 mm²	
finely stranded with core end processing	2.5 50 mm²	
connectable conductor cross-section for auxiliary contacts		
 solid or stranded 	0.5 2.5 mm²	
finely stranded with core end processing	0.5 2.5 mm²	
type of connectable conductor cross-sections		
for auxiliary contacts		
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
for AWG cables for auxiliary contacts	2x (20 16), 2x (18 14)	
AWG number as coded connectable conductor cross		
section		
	10 2	

Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 positively driven operation according to IEC 60947-5-1 	No
suitability for use safety-related switching OFF	Yes
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Certificates/ approvals

General Product Approval



Confirmation





<u>KC</u>





Type Examination Certificate





Special Test Certificate



Marine / Shipping other











Confirmation

Railway	Dangerous Good	Environment

<u>Vibration and Shock</u> <u>Transport Information</u> <u>Environmental Confirmations</u>

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2045-1AP04

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2045-1AP04

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$


https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-1AP04


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2045-1AP04&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-1AP04/chai

Further characteristics (e.g. electrical endurance, switching frequency)








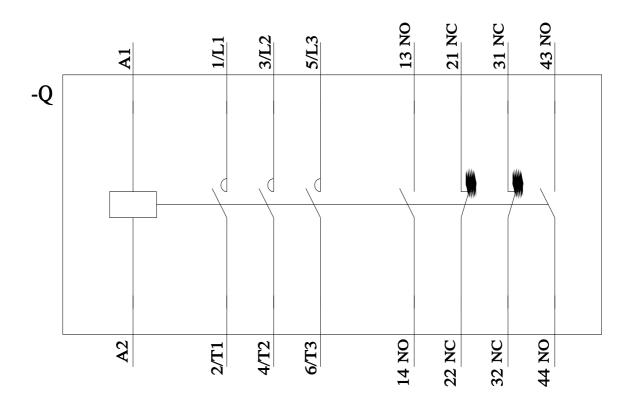

last modified: 8/15/2023 🖸

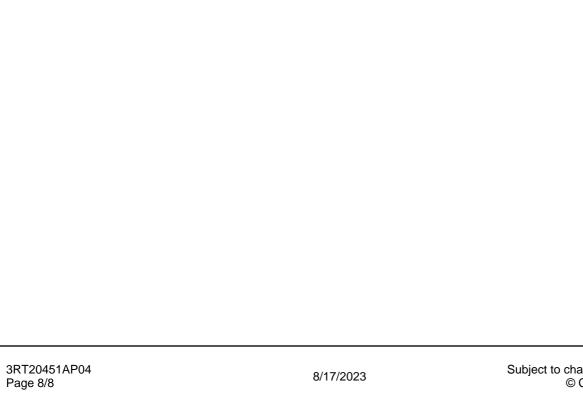

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20451AP04