SIEMENS

Data sheet 3RT2045-3AB00



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 24 V AC, 50 Hz, auxiliary contacts: 1 NO + 1 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S3 $\,$

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S3
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	15.9 W
 at AC in hot operating state per pole 	5.3 W
 without load current share typical 	7.3 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	1 000 V
• of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
of main circuit rated value	8 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	10.3g / 5 ms, 6,.g / 10 ms
shock resistance with sine pulse	
• at AC	16.3g / 5 ms, 10.g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
 at AC-3 rated value maximum 	1 000 V
• at AC-3e rated value maximum	1 000 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated	125 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated	125 A
value	
 up to 690 V at ambient temperature 60 °C rated value 	105 A
• at AC-3	
— at 400 V rated value	80 A
— at 500 V rated value	80 A
— at 690 V rated value	58 A
— at 1000 V rated value	30 A
• at AC-3e	30 A
	90 A
— at 400 V rated value	80 A 80 A
— at 500 V rated value	
— at 690 V rated value	58 A
— at 1000 V rated value	30 A
• at AC-4 at 400 V rated value	66 A
• at AC-5a up to 690 V rated value	110 A
at AC-5b up to 400 V rated value	80 A
• at AC-6a	
 up to 230 V for current peak value n=20 rated value 	80 A
 up to 400 V for current peak value n=20 rated value 	80 A
 up to 500 V for current peak value n=20 rated value 	80 A
 up to 690 V for current peak value n=20 rated value 	58 A
• at AC-6a	
 up to 230 V for current peak value n=30 rated value 	54 A
 up to 400 V for current peak value n=30 rated value 	54 A
 up to 500 V for current peak value n=30 rated value 	54 A
 up to 690 V for current peak value n=30 rated value 	54 A
minimum cross-section in main circuit at maximum AC-1 rated	50 mm ²
value operational current for approx. 200000 operating cycles at	
AC-4	
• at 400 V rated value	34 A
• at 690 V rated value	24 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	60 A
— at 110 V rated value	9 A
— at 220 V rated value	2 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.4 A
with 2 current paths in series at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
	10 A
— at 220 V rated value	
— at 440 V rated value	1.8 A
— at 600 V rated value	1 A
with 3 current paths in series at DC-1	400 A
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	80 A
— at 440 V rated value	4.5 A

	— at 600 V rated value	2.6 A
= 8.6 V rated value	• at 1 current path at DC-3 at DC-5	
= 11 10 V Intels value	— at 24 V rated value	40 A
	— at 60 V rated value	6 A
### ### ### ### ### ### ### ### ### ##	— at 110 V rated value	2.5 A
With 2 current paths in series at DC-3 at DC-5	— at 220 V rated value	1 A
### with 2 current paths in series at DC-3 at DC-5 — at 24 V rated value — at 10 V rated value — at 20 V rated value — at 20 V rated value — at 40 V rated value — at 60 V rated value — at 70 V rated value — at 10 V rated value — at 10 V rated value — at 10 V rated value — at 20 V rated value — 37 kW operating power • at AC-2 at 400 V rated value — at 200 V rated value — at 800 V rated value — at 400 V rated value — at 600 V rated value — at 100 V rated value — at 800 V rated value — at 800 V rated value — at 900 V rated value — at 800 V rated value — at 800 V rated value — at 900 V rated value — at 800 V rated value — at 900 V rated value — a	— at 440 V rated value	0.15 A
	— at 600 V rated value	0.06 A
	 with 2 current paths in series at DC-3 at DC-5 	
	— at 24 V rated value	100 A
- at 220 V rated value - at 600 V rated value 0.42 A 0.16 A **with 3 current paths in series at DC-3 at DC-5 - at 24 V rated value 100 A - at 110 V rated value 100 A - at 110 V rated value 100 A - at 110 V rated value 100 A - at 120 V rated value 20 V rated value 35 A - at 440 V rated value 35 A - at 440 V rated value 37 kW **at AC-3 - at 230 V rated value 22 kW - at 230 V rated value 37 kW - at 560 V rated value 37 kW - at 660 V rated value 37 kW - at 660 V rated value 37 kW - at 660 V rated value 37 kW - at 400 V rated value 37 kW - at 560 V rated value 37 kW - at 690 V rated value 38 kW - at 900 V rated value 38 kW - at 900 V rated value 39 kW - at 900 V rated value 30 V rated value 30 V rated value 40 V rated value 41 kW - at 900 V rated value 42 kW - at 900 V rated value 42 kW - at 900 V rated value 43 kW - at 900 V rated value 44 kW - at 900 V rated value 45 kW - at 900 V for current peak value n=20 rated value 40 vp to 400 V for current peak value n=20 rated value 40 vp to 400 V for current peak value n=20 rated value 40 vp to 400 V for current peak value n=20 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for	— at 60 V rated value	100 A
	— at 110 V rated value	100 A
and the second section of the secti	— at 220 V rated value	7 A
with 3 current paths in series at DC-3 at DC-5	— at 440 V rated value	0.42 A
		0.16 A
	 with 3 current paths in series at DC-3 at DC-5 	
- at 110 V rated value	— at 24 V rated value	100 A
at 220 V rated value	— at 60 V rated value	100 A
	— at 110 V rated value	
operating power at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value — at 690 V rated value — at 230 V rated value — at 300 V rated value — at 400 V rated value — at 500 V rated value — at 690 V for current peak value n=20 rated value — at 690 V for current peak value n=20 rated value — up to 500 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 500 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current	— at 220 V rated value	35 A
operating power at AC-2 at 400 V rated value at AC-3 — at 230 V rated value — at 400 V rated value — at 690 V rated value — at 690 V rated value — at 1000 V rated value — at 1000 V rated value — at 230 V rated value — at 230 V rated value — at 1000 V rated value — at 400 V rated value — at 690 V rated value — at 690 V rated value — at 400 V rated value — at 690 V rated value — at 690 V rated value — at 690 V rated value — at 1000 V rated value — at 690 V rated value 9 to 200 V for current peak value n=20 rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V f	— at 440 V rated value	0.8 A
at AC-2 at 400 V rated value at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 1000 V rated value — at 1000 V rated value — at 1000 V rated value — at 230 V rated value — at 400 V rated value — at 400 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value — at 690 V rated value — at 1000 V rated value — 25 kW operating power for approx. 200000 operating cycles at AC-4 4 at 400 V rated value operating apparent power at AC-8a up to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 40 F kVA 51 kVA 52 kW 53 kVA 54 kW 55 kVA 56 kVA 57 kVA 58 kVA 58 kVA 59 kVA 69 kVA 69 kVA 69 kVA 69 kVA 60 kVA 60 kVA 61 kVA 63 kVA 64 f kVA 65 kVA 66 f kVA 66 f kVA 67 kVA 68 kVA 68 kVA 69 kVA	— at 600 V rated value	0.35 A
at AC-3 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 1000 V rated value at 1000 V rated value at AC-3e at 230 V rated value at AC-3e at 230 V rated value at 400 V rated value at 500 V rated value 55 kW at 1000 V rated value 21.8 kW operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 800 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 46.5 kVA short-time withstand current in cold operating state up to 40 °C ilimited to 1 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 S switching at zero current maximum ilimited to 60 S switching at zero current maximum ilimited to 60 S switching at zero current maximum ilimited to 60 S switching at zero current maximum ilimited to 60 S switching at zero current maximum ilimited to 60 S switching at zero current maximum	operating power	
- at 230 V rated value - at 400 V rated value - at 590 V rated value - at 590 V rated value - at 590 V rated value - at 1000 V rated value - at 230 V rated value - at 1000 V rated value - at 230 V rated value - at 230 V rated value - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 590 V rated value - at 590 V rated value - at 590 V rated value - at 1000 V rated value - at 400 V rated value - at 400 V rated value - at 400 V rated value - at 690 V rated value - at 500 V rated value - at 690 V rated value - at 500 V rated value - at 690 V rated	 at AC-2 at 400 V rated value 	37 kW
- at 400 V rated value - at 690 V rated value - at 1000 V rated value - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 690 V ra	• at AC-3	
- at 500 V rated value	— at 230 V rated value	22 kW
- at 690 V rated value - at 1000 V rated value at AC-3e - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 690 V rated value - at 400 V rated value - at 690 V rated value - at 400 V rated value - at 690 V	— at 400 V rated value	37 kW
- at 1000 V rated value • at AC-3e - at 230 V rated value - at 400 V rated value - at 500 V rated value - at 500 V rated value - at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up t	— at 500 V rated value	45 kW
at AC-3e — at 230 V rated value — at 400 V rated value — at 690 V rated value — at 1000 V rated value — at 1000 V rated value — at 1000 V rated value — at 690 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value — at 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • 1500 A; Use minimum cross-section acc. to AC-1 rated value • limited to 10 s switching at zero current maximum • limited to 50 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum	— at 690 V rated value	55 kW
- at 230 V rated value - at 400 V rated value - at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 400 V rated value - at 400 V rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=30 rated value - at 690 V for current p	— at 1000 V rated value	37 kW
- at 400 V rated value - at 500 V rated value - at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 400 V rated value - at 690 V rated value - at 690 V rated value - at 690 V rated value - up to 230 V for current peak value n=20 rated value - up to 230 V for current peak value n=20 rated value - up to 500 V for current peak value n=20 rated value - up to 690 V for current peak value n=20 rated value - up to 690 V for current peak value n=20 rated value - up to 230 V for current peak value n=20 rated value - up to 230 V for current peak value n=30 rated value - up to 400 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 690 V for current peak value n=30 rated value	• at AC-3e	
- at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 1000 V rated value - at 1000 V rated value operating power for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 50 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum	— at 230 V rated value	
- at 690 V rated value - at 1000 V rated value 37 kW operating power for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=20 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum	— at 400 V rated value	
operating power for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 400 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for surrent peak value n=30 rated value • up to 500 V for surrent peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum		
operating power for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum		
at 400 V rated value at 690 V rated value 21.8 kW operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current in cold operating state up to 40 °C ilmited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum		37 kW
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 230 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 46.7 kVA up to 690 V for current peak value n=30 rated value 46.5 kVA Short-time withstand current in cold operating state up to 400 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		
at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 230 V for current peak value n=30 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value ilmited to 1 s switching at zero current maximum ilmited to 10 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum		17 9 kW
operating apparent power at AC-6a oup to 230 V for current peak value n=20 rated value oup to 400 V for current peak value n=20 rated value oup to 500 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value oup to 230 V for current peak value n=30 rated value oup to 400 V for current peak value n=30 rated value oup to 500 V for current peak value n=30 rated value oup to 500 V for current peak value n=30 rated value oup to 690 V for current peak value n=30 rated value oup to 6		
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		21.6 (1)
• up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching frequency		31 kVA
up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value inited to 1 s switching at zero current maximum ilmited to 5 s switching at zero current maximum ilmited to 10 s switching at zero current maximum ilmited to 10 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum	·	
up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilmited to 1 s switching at zero current maximum Ilmited to 5 s switching at zero current maximum Ilmited to 10 s switching at zero current maximum Ilmited to 30 s switching at zero current maximum Ilmited to 30 s switching at zero current maximum Ilmited to 60 s switching at zero current maximum Ilmi		
operating apparent power at AC-6a • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching frequency		
 up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		
 up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		21.5 kVA
 up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		
• up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum		
short-time withstand current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum 1 500 A; Use minimum cross-section acc. to AC-1 rated value 538 A; Use minimum cross-section acc. to AC-1 rated value 423 A; Use minimum cross-section acc. to AC-1 rated value		
40 °C ■ limited to 1 s switching at zero current maximum ■ limited to 5 s switching at zero current maximum ■ limited to 10 s switching at zero current maximum ■ limited to 30 s switching at zero current maximum ■ limited to 30 s switching at zero current maximum ■ limited to 60 s switchin		
 limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		
 limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 423 A; Use minimum cross-section acc. to AC-1 rated value no-load switching frequency 	 limited to 1 s switching at zero current maximum 	1 500 A; Use minimum cross-section acc. to AC-1 rated value
 ◆ limited to 30 s switching at zero current maximum ◆ limited to 60 s switching at zero current maximum No-load switching frequency 538 A; Use minimum cross-section acc. to AC-1 rated value 423 A; Use minimum cross-section acc. to AC-1 rated value 	 limited to 5 s switching at zero current maximum 	1 186 A; Use minimum cross-section acc. to AC-1 rated value
• limited to 60 s switching at zero current maximum 10	 limited to 10 s switching at zero current maximum 	851 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	 limited to 30 s switching at zero current maximum 	538 A; Use minimum cross-section acc. to AC-1 rated value
	limited to 60 s switching at zero current maximum	423 A; Use minimum cross-section acc. to AC-1 rated value
a at AC	no-load switching frequency	
♥ at AO	• at AC	5 000 1/h
operating frequency	operating frequency	
• at AC-1 maximum 900 1/h	• at AC-1 maximum	900 1/h

e at AC 2 maximum	400 1/b
at AC-2 maximumat AC-3 maximum	400 1/h 1 000 1/h
at AC-3e maximum at AC-3e maximum	1 000 1/h
at AC-3e maximum at AC-4 maximum	300 1/h
• at AC-4 maximum Control circuit/ Control	300 1/11
	AC
type of voltage of the control supply voltage	AC
control supply voltage at AC	24.1/
at 50 Hz rated value	24 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	296 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.61
apparent holding power of magnet coil at AC	
• at 50 Hz	19 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.38
closing delay	
• at AC	13 50 ms
opening delay	
• at AC	10 21 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
 at 230 V rated value 	6 A
 at 400 V rated value 	3 A
 at 500 V rated value 	2 A
 at 690 V rated value 	1 A
operational current at DC-12	
at 24 V rated value	10 A
at 48 V rated value	6 A
● at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
• at 220 V rated value	1 A
• at 600 V rated value	0.15 A
operational current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	2 A
at 60 V rated value	2 A
• at 110 V rated value	1 A
at 125 V rated value	0.9 A
at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	77 A
	62 A
at 600 V rated value violed mechanical performance [hp]	VL N
yielded mechanical performance [hp]	
• for single-phase AC motor	7.5 ha
— at 110/120 V rated value	7.5 hp
— at 230 V rated value	15 hp

• for 3-phase AC motor	251
— at 200/208 V rated value	25 hp
— at 220/230 V rated value	30 hp
— at 460/480 V rated value	60 hp
— at 575/600 V rated value	60 hp
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
for short-circuit protection of the main circuit	-O. 050 A (000 V 400 I.A) -M. 400 A (000 V 400 I.A) B000, 000 A (445 V 00
— with type of coordination 1 required	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)
— with type of assignment 2 required	gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
nstallation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	140 mm
width	70 mm
depth	152 mm
required spacing	
 with side-by-side mounting 	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
 for grounded parts 	
— forwards	20 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
for live parts	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
 for auxiliary and control circuit 	spring-loaded terminals
 at contactor for auxiliary contacts 	Spring-type terminals
of magnet coil	Spring-type terminals
type of connectable conductor cross-sections for main contacts	
finely stranded with core end processing	2x (2.5 35 mm²), 1x (2.5 50 mm²)
connectable conductor cross-section for main contacts	
• solid	2.5 16 mm²
• stranded	6 70 mm²
finely stranded with core end processing	2.5 50 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 2.5 mm²
 finely stranded with core end processing 	0.5 2.5 mm²
finely stranded without core end processing	0.5 2.5 mm²
type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid or stranded	2x (0.5 2.5 mm²)
— finely stranded with core end processing	2x (0.5 1.5 mm²)
— finely stranded without core end processing	2x (0.5 2.5 mm²)
for AWG cables for auxiliary contacts	2x (20 16)
AWG number as coded connectable conductor cross	
section	

• for main contacts	10 2	
 for auxiliary contacts 	20 14	
Safety related data		
product function		
 mirror contact according to IEC 60947-4-1 	Yes	
 positively driven operation according to IEC 60947-5-1 	No	
suitability for use safety-related switching OFF	Yes	
B10 value with high demand rate according to SN 31920	1 000 000	
proportion of dangerous failures		
 with low demand rate according to SN 31920 	40 %	
 with high demand rate according to SN 31920 	73 %	
failure rate [FIT] with low demand rate according to SN 31920	100 FIT	
T1 value for proof test interval or service life according to IEC 61508	20 a	
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
Certificates/ approvals		

Certificates/ approvals

General Product Approval





Confirmation



<u>KC</u>





Type Examination Certificate





Type Test Certificates/Test Report

Special Test Certificate

Marine / Shipping









<u>firmations</u>





other	Railway	Dangerous Good	Environment	
Confirmation	Vibration and Shock	Transport Information	Environmental Con-	

Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

 $\underline{\text{https://www.siemens.com/ic10}}$

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2045-3AB00

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2045-3AB00


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-3AB00


 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2045-3AB00&lang=en

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2045-3AB00&objecttype=14&gridview=view1







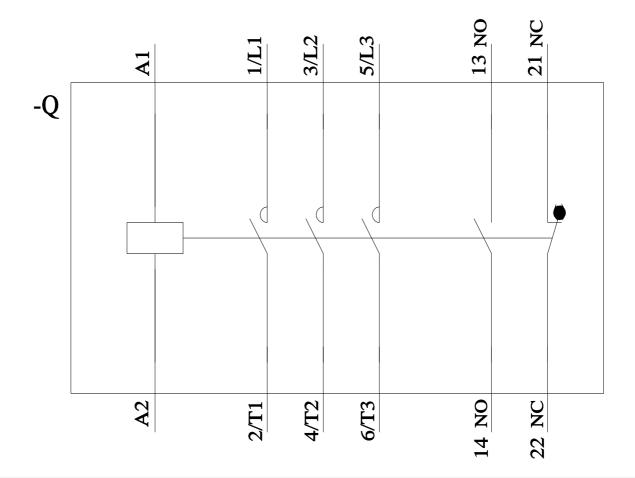

last modified: 8/15/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20453AB00