# SIEMENS

#### Data sheet

### 3RT2045-3AC20



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 24 V AC, 50/60 Hz, auxiliary contacts: 1 NO + 1 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S3

product brand name	SIRIUS		
product designation	Power contactor		
product type designation	3RT2		
General technical data			
size of contactor	S3		
product extension			
<ul> <li>function module for communication</li> </ul>	No		
<ul> <li>auxiliary switch</li> </ul>	Yes		
power loss [W] for rated value of the current			
<ul> <li>at AC in hot operating state</li> </ul>	15.9 W		
<ul> <li>at AC in hot operating state per pole</li> </ul>	5.3 W		
<ul> <li>without load current share typical</li> </ul>	25 W		
insulation voltage			
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	1 000 V		
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V		
surge voltage resistance			
<ul> <li>of main circuit rated value</li> </ul>	8 kV		
<ul> <li>of auxiliary circuit rated value</li> </ul>	6 kV		
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V		
shock resistance at rectangular impulse			
• at AC	10.3g / 5 ms, 6,.g / 10 ms		
shock resistance with sine pulse			
• at AC	16.3g / 5 ms, 10.g / 10 ms		
mechanical service life (operating cycles)			
<ul> <li>of contactor typical</li> </ul>	10 000 000		
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000		
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000		
reference code according to IEC 81346-2	Q		
Substance Prohibitance (Date)	03/01/2017		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
ambient temperature			
<ul> <li>during operation</li> </ul>	-25 +60 °C		
during storage	-55 +80 °C		
relative humidity minimum	10 %		
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %		
Main circuit			
number of poles for main current circuit	3		

number of NO contacts for main contacts	3		
operating voltage			
at AC-3 rated value maximum	1 000 V		
• at AC-3e rated value maximum	1 000 V		
operational current			
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated</li> </ul>	125 A		
value			
• at AC-1			
— up to 690 V at ambient temperature 40 °C rated value	125 A		
— up to 690 V at ambient temperature 60 °C rated value	105 A		
• at AC-3			
— at 400 V rated value	80 A		
— at 500 V rated value	80 A		
— at 690 V rated value	58 A		
— at 1000 V rated value	30 A		
• at AC-3e			
— at 400 V rated value	80 A		
— at 500 V rated value	80 A		
— at 690 V rated value	58 A		
— at 1000 V rated value	30 A		
at AC-4 at 400 V rated value	66 A		
at AC-5a up to 690 V rated value	110 A		
• at AC-5b up to 400 V rated value	80 A		
• at AC-6a			
— up to 230 V for current peak value n=20 rated value	80 A		
— up to 400 V for current peak value n=20 rated value	80 A		
— up to 500 V for current peak value n=20 rated value	80 A		
— up to 690 V for current peak value n=20 rated value	58 A		
• at AC-6a			
— up to 230 V for current peak value n=30 rated value	54 A		
— up to 400 V for current peak value n=30 rated value	54 A		
— up to 500 V for current peak value n=30 rated value	54 A		
— up to 690 V for current peak value n=30 rated value	54 A		
minimum cross-section in main circuit at maximum AC-1 rated	50 mm <sup>2</sup>		
value			
operational current for approx. 200000 operating cycles at AC-4			
• at 400 V rated value	34 A		
• at 690 V rated value	24 A		
operational current			
<ul> <li>at 1 current path at DC-1</li> </ul>			
— at 24 V rated value	100 A		
— at 60 V rated value	60 A		
— at 110 V rated value	9 A		
— at 220 V rated value	2 A		
— at 440 V rated value	0.6 A		
— at 600 V rated value	0.4 A		
<ul> <li>with 2 current paths in series at DC-1</li> </ul>			
— at 24 V rated value	100 A		
— at 60 V rated value	100 A		
— at 110 V rated value	100 A		
— at 220 V rated value	10 A		
— at 440 V rated value	1.8 A		
— at 600 V rated value	1 A		
<ul> <li>with 3 current paths in series at DC-1</li> </ul>			
— at 24 V rated value	100 A		
— at 60 V rated value	100 A		
— at 110 V rated value	100 A		
— at 220 V rated value	80 A		
— at 440 V rated value	4.5 A		

— at 600 V rated value	2.6 A				
• at 1 current path at DC-3 at DC-5					
— at 24 V rated value	40 A				
— at 60 V rated value	6 A				
— at 110 V rated value	2.5 A				
— at 220 V rated value	1 A 0.15 A				
— at 440 V rated value	0.15 A				
— at 600 V rated value	0.06 A				
• with 2 current paths in series at DC-3 at DC-5	400 A				
— at 24 V rated value — at 60 V rated value	100 A				
	100 A				
— at 110 V rated value — at 220 V rated value	100 A				
— at 440 V rated value	7 A 0 42 A				
— at 600 V rated value	0.42 A 0.16 A				
with 3 current paths in series at DC-3 at DC-5	0.10 A				
- at 24 V rated value	100 A				
— at 60 V rated value	100 A				
— at 100 V rated value	100 A				
— at 220 V rated value	35 A				
— at 440 V rated value	0.8 A				
— at 600 V rated value	0.35 A				
operating power					
at AC-2 at 400 V rated value	37 kW				
• at AC-3					
— at 230 V rated value	22 kW				
— at 400 V rated value	37 kW				
— at 500 V rated value	45 kW				
— at 690 V rated value	55 kW				
— at 1000 V rated value	37 kW				
• at AC-3e					
— at 230 V rated value	22 kW				
— at 400 V rated value	37 kW				
— at 500 V rated value	45 kW				
— at 690 V rated value	55 kW				
— at 1000 V rated value	37 kW				
operating power for approx. 200000 operating cycles at AC-					
at 400 V rated value	17.9 kW				
at 690 V rated value	21.8 kW				
operating apparent power at AC-6a					
up to 230 V for current peak value n=20 rated value	31 kVA				
• up to 400 V for current peak value n=20 rated value	55 kVA				
• up to 500 V for current peak value n=20 rated value	69 kVA				
• up to 690 V for current peak value n=20 rated value	69 kVA				
operating apparent power at AC-6a					
• up to 230 V for current peak value n=30 rated value	21.5 kVA				
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	37.4 kVA				
<ul> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	46.7 kVA				
<ul> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	64.5 kVA				
short-time withstand current in cold operating state up to 40 °C					
<ul> <li>limited to 1 s switching at zero current maximum</li> </ul>	1 500 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>limited to 5 s switching at zero current maximum</li> </ul>	1 186 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>limited to 10 s switching at zero current maximum</li> </ul>	851 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>limited to 30 s switching at zero current maximum</li> </ul>	538 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>limited to 60 s switching at zero current maximum</li> </ul>	423 A; Use minimum cross-section acc. to AC-1 rated value				
no-load switching frequency					
• at AC	5 000 1/h				
operating frequency					
• at AC-1 maximum	900 1/h				

• at AC-2 maximum	400 1/h			
● at AC-3 maximum	1 000 1/h			
● at AC-3e maximum	1 000 1/h			
● at AC-4 maximum	300 1/h			
Control circuit/ Control				
type of voltage of the control supply voltage	AC			
control supply voltage at AC				
• at 50 Hz rated value	24 V			
• at 60 Hz rated value	24 V			
operating range factor control supply voltage rated value of magnet coil at AC				
• at 50 Hz	0.8 1.1			
• at 60 Hz	0.85 1.1			
apparent pick-up power of magnet coil at AC				
● at 50 Hz	348 VA			
• at 60 Hz	296 VA			
inductive power factor with closing power of the coil				
• at 50 Hz	0.62			
• at 60 Hz	0.55			
apparent holding power of magnet coil at AC				
• at 50 Hz	25 VA			
• at 60 Hz	18 VA			
inductive power factor with the holding power of the coil				
• at 50 Hz	0.35			
• at 60 Hz	0.41			
closing delay				
• at AC	13 50 ms			
opening delay				
• at AC	10 21 ms			
arcing time	10 20 ms			
	Standard A1 - A2			
control version of the switch operating mechanism				
Auxiliary circuit				
Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact	1			
Auxiliary circuit           number of NC contacts for auxiliary contacts instantaneous contact           number of NO contacts for auxiliary contacts instantaneous contact	1			
Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum	1			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15	1 1 10 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value	1 1 10 A 6 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value	1 1 10 A 6 A 3 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value	1 1 10 A 6 A 3 A 2 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value	1 1 10 A 6 A 3 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 690 V rated value	1 1 10 A 6 A 3 A 2 A 1 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 24 V rated value	1 1 10 A 6 A 3 A 2 A 1 A 10 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 48 V rated value         • at 48 V rated value	1 1 10 A 6 A 3 A 2 A 1 A 10 A 6 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 400 V rated value         • at 690 V rated value         • at 690 V rated value         • at 600 V rated value         • at 24 V rated value         • at 48 V rated value         • at 400 V rated value	1 1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 48 V rated value         • at 48 V rated value         • at 40 V rated value	1 1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 3 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 48 V rated value         • at 48 V rated value         • at 48 V rated value         • at 410 V rated value         • at 220 V rated value	1 1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 3 A 2 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 690 V rated value         • at 690 V rated value         • at 48 V rated value         • at 48 V rated value         • at 400 V rated value         • at 220 V rated value	1 1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 3 A 2 A 1 A 10 A 6 A 3 A 2 A 1 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 690 V rated value         • at 690 V rated value         • at 24 V rated value         • at 24 V rated value         • at 48 V rated value         • at 400 V rated value         • at 250 V rated value         • at 24 V rated value         • at 24 V rated value         • at 25 V rated value         • at 110 V rated value         • at 220 V rated value         • at 220 V rated value         • at 220 V rated value         • at 600 V rated value	1 1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 3 A 2 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 24 V rated value         • at 24 V rated value         • at 400 V rated value         • at 400 V rated value         • at 500 V rated value         • at 400 V rated value         • at 400 V rated value         • at 400 V rated value         • at 25 V rated value         • at 110 V rated value         • at 125 V rated value         • at 220 V rated value         • at 600 V rated value         • at 600 V rated value	1 1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 3 A 2 A 1 A 10 A 6 A 3 A 2 A 1 A 10 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 24 V rated value         • at 24 V rated value         • at 48 V rated value         • at 110 V rated value         • at 125 V rated value         • at 220 V rated value         • at 24 V rated value         • at 220 V rated value         • at 600 V rated value         • at 24 V rated value	1 1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 10			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 48 V rated value         • at 48 V rated value         • at 48 V rated value         • at 110 V rated value         • at 125 V rated value         • at 600 V rated value         • at 600 V rated value         • at 60 V rated value         • at 60 V rated value         • at 110 V rated value         • at 220 V rated value         • at 600 V rated value         • at 220 V rated value         • at 600 V rated value         • at 600 V rated value         • at 48 V rated value         • at 48 V rated value         • at 24 V rated value         • at 48 V rated value         • at 48 V rated value	1 1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 3 A 2 A 1 A 10 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 48 V rated value         • at 48 V rated value         • at 40 V rated value         • at 690 V rated value         • at 690 V rated value         • at 490 V rated value         • at 490 V rated value         • at 690 V rated value         • at 690 V rated value         • at 24 V rated value         • at 24 V rated value         • at 25 V rated value         • at 125 V rated value         • at 220 V rated value         • at 600 V rated value         • at 48 V rated value         • at 48 V rated value         • at 24 V rated value         • at 48 V rated value         • at 60 V rated value	1 1 1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 3 A 2 A 1 A 10			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 400 V rated value         • at 220 V rated value         • at 110 V rated value         • at 220 V rated value         • at 48 V rated value         • at 48 V rated value         • at 48 V rated value         • at 24 V rated value         • at 24 V rated value         • at 48 V rated value	1 1 1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 6 A 3 A 2 A 1 A 10			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 400 V rated value         • at 24 V rated value         • at 24 V rated value         • at 110 V rated value         • at 220 V rated value         • at 220 V rated value         • at 600 V rated value         • at 24 V rated value         • at 48 V rated value         • at 100 V rated value	1         1         10 A         6 A         3 A         2 A         1 A         10 A         6 A         6 A         1 A         10 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         10 A         2 A         1 A         0.15 A         10 A         2 A         1 A         0.9 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 690 V rated value         • at 60 V rated value         • at 24 V rated value         • at 60 V rated value         • at 110 V rated value         • at 220 V rated value         • at 220 V rated value         • at 220 V rated value         • at 600 V rated value         • at 220 V rated value         • at 24 V rated value         • at 600 V rated value         • at 24 V rated value         • at 600 V rated value         • at 24 V rated value         • at 10 V rated value	1         1         10 A         6 A         3 A         2 A         1 A         10 A         6 A         3 A         2 A         1 A         10 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         7 A         10 A         2 A         10 A         2 A         1 A         0.15 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 690 V rated value         • at 690 V rated value         • at 48 V rated value         • at 48 V rated value         • at 110 V rated value         • at 220 V rated value         • at 24 V rated value         • at 24 V rated value         • at 24 V rated value         • at 220 V rated value         • at 24 V rated value         • at 24 V rated value         • at 600 V rated value         • at 220 V rated value         • at 24 V rated value         • at 24 V rated value         • at 600 V rated value         • at 24 V rated value         • at 600 V rated value         • at 110 V rated value <tr< td=""><td>1         1         10 A         6 A         3 A         2 A         1 A         10 A         6 A         3 A         2 A         1 A         10 A         6 A         6 A         1 A         10 A         2 A         1 A         0.15 A         10 A         2 A         1 A         0.9 A         0.3 A         0.1 A</td></tr<>	1         1         10 A         6 A         3 A         2 A         1 A         10 A         6 A         3 A         2 A         1 A         10 A         6 A         6 A         1 A         10 A         2 A         1 A         0.15 A         10 A         2 A         1 A         0.9 A         0.3 A         0.1 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 690 V rated value         • at 690 V rated value         • at 48 V rated value         • at 48 V rated value         • at 110 V rated value         • at 220 V rated value         • at 220 V rated value         • at 220 V rated value         • at 24 V rated value         • at 60 V rated value         • at 220 V rated value         • at 220 V rated value         • at 24 V rated value         • at 24 V rated value         • at 220 V rated value         • at 600 V rated value         • at 24 V rated value         • at 60 V rated value         • at 110 V rated value         • at 125 V rated value         • at 125 V rated value <tr< td=""><td>1         1         10 A         6 A         3 A         2 A         1 A         10 A         6 A         3 A         2 A         1 A         10 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         7 A         10 A         2 A         10 A         2 A         1 A         0.15 A</td></tr<>	1         1         10 A         6 A         3 A         2 A         1 A         10 A         6 A         3 A         2 A         1 A         10 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         6 A         7 A         10 A         2 A         10 A         2 A         1 A         0.15 A			
Auxiliary circuit         number of NC contacts for auxiliary contacts instantaneous contact         number of NO contacts for auxiliary contacts instantaneous contact         operational current at AC-12 maximum         operational current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 690 V rated value         • at 690 V rated value         • at 48 V rated value         • at 48 V rated value         • at 110 V rated value         • at 220 V rated value         • at 24 V rated value         • at 24 V rated value         • at 24 V rated value         • at 220 V rated value         • at 24 V rated value         • at 24 V rated value         • at 600 V rated value         • at 220 V rated value         • at 24 V rated value         • at 24 V rated value         • at 600 V rated value         • at 24 V rated value         • at 600 V rated value         • at 110 V rated value <tr< td=""><td>1         1         10 A         6 A         3 A         2 A         1 A         10 A         6 A         3 A         2 A         1 A         10 A         6 A         3 A         2 A         1 A         0 A         6 A         3 A         2 A         1 A         0 A         2 A         1 A         0 A         2 A         1 A         0</td></tr<>	1         1         10 A         6 A         3 A         2 A         1 A         10 A         6 A         3 A         2 A         1 A         10 A         6 A         3 A         2 A         1 A         0 A         6 A         3 A         2 A         1 A         0 A         2 A         1 A         0 A         2 A         1 A         0			

	77. 4				
at 480 V rated value	77 A				
at 600 V rated value	62 A				
yielded mechanical performance [hp]					
• for single-phase AC motor	7.5 hp				
- at 110/120 V rated value	7.5 hp				
— at 230 V rated value	15 hp				
for 3-phase AC motor					
— at 200/208 V rated value	25 hp				
— at 220/230 V rated value	30 hp				
— at 460/480 V rated value	60 hp				
— at 575/600 V rated value	60 hp				
contact rating of auxiliary contacts according to UL	A600 / P600				
Short-circuit protection					
design of the fuse link					
<ul> <li>for short-circuit protection of the main circuit</li> </ul>					
<ul> <li>— with type of coordination 1 required</li> </ul>	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)				
<ul> <li>— with type of assignment 2 required</li> </ul>	gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA)				
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 10 A (500 V, 1 kA)				
Installation/ mounting/ dimensions					
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface				
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715				
<ul> <li>side-by-side mounting</li> </ul>	Yes				
height	140 mm				
width	70 mm				
depth	152 mm				
required spacing					
<ul> <li>with side-by-side mounting</li> </ul>					
— forwards	20 mm				
— upwards	10 mm				
— downwards	10 mm				
— at the side	0 mm				
<ul> <li>for grounded parts</li> </ul>					
— forwards	20 mm				
— upwards	10 mm				
— at the side	10 mm				
— downwards	10 mm				
<ul> <li>for live parts</li> </ul>					
— forwards	20 mm				
— upwards	10 mm				
— downwards	10 mm				
— at the side	10 mm				
Connections/ Terminals					
type of electrical connection					
for main current circuit	screw-type terminals				
<ul> <li>for auxiliary and control circuit</li> </ul>	spring-loaded terminals				
at contactor for auxiliary contacts	Spring-type terminals				
of magnet coil	Spring-type terminals				
type of connectable conductor cross-sections for main contacts	$2x/25 = 25 \text{ mm}^2$ $1x/25 = 50 \text{ mm}^2$				
finely stranded with core end processing	2x (2.5 35 mm²), 1x (2.5 50 mm²)				
connectable conductor cross-section for main contacts	2.5. 16 mm <sup>2</sup>				
• solid	2.5 16 mm <sup>2</sup>				
<ul> <li>stranded</li> <li>finally stranded with core and processing</li> </ul>	6 70 mm <sup>2</sup>				
finely stranded with core end processing	2.5 50 mm <sup>2</sup>				
connectable conductor cross-section for auxiliary contacts	0.5 0.5 mm²				
solid or stranded	0.5 2.5 mm <sup>2</sup>				
finely stranded with core end processing	0.5 2.5 mm <sup>2</sup>				
finely stranded without core end processing	0.5 2.5 mm²				
<ul> <li>type of connectable conductor cross-sections</li> <li>for auxiliary contacts</li> </ul>					

— solid or strar	nded		2x (0.5	. 2.5 mm²)			
— finelv strand	led with core end process	ina		. 1.5 mm²)			
-	led without core end proce	÷		2x (0.5 2.5 mm <sup>2</sup> )			
-	or auxiliary contacts	2x (0.5 2.5 mm) 2x (20 16)					
	d connectable conducto	r cross					
<ul> <li>for main contacts</li> </ul>			10 2				
<ul> <li>for auxiliary conta</li> </ul>	acts		20 14				
Safety related data							
product function							
•	cording to IEC 60947-4-1		Yes				
	operation according to IEC	C 60947-5-1	No				
suitability for use safety-			Yes				
	nand rate according to SN	I 31920	1 000 000				
proportion of dangerou							
	rate according to SN 319	20	40 %				
	I rate according to SN 319		73 %				
	v demand rate according		100 FIT				
	nterval or service life acco		20 a				
protection class IP on	the front according to II	EC 60529	IP20				
-	e front according to IEC		finger-sa	fe, for vertical contact	from the front		
Certificates/ approvals	-						
General Product Appr	roval	Confirmatio	'n	•	кс		
USA CSA	ccc			<u> </u>		נחנ	
EMC	Safety/Safety of Ma- chinery	Declaration of Conformity		Test Certificates			
RCM	<u>Type Examination Cer-</u> <u>tificate</u>	UK CA		CE EG-Konf.	<u>Type Test Certific-</u> ates/Test Report	<u>Special Test Certific-</u> <u>ate</u>	
Marine / Shipping							
ABS		Hoyds Register urs		PRS	RINA	KMRS	
other	Railway	Dangerous Go	od E	Environment			
<u>Confirmation</u>	Vibration and Shock	Transport Inforn	nation <u>I</u>	Environmental Con- firmations			
Further information Siemens has decided to exit the Russian market (see here). <a href="https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business">https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business</a> Siemens is working on the renewal of the current EAC certificates.							

Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

#### Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2045-3AC20 Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2045-3AC20

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-3AC20


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2045-3AC20&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-3AC20/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2045-3AC20&objecttype=14&gridview=view1

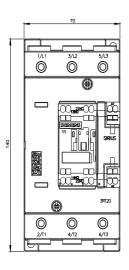

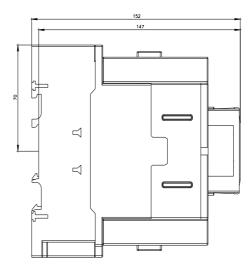

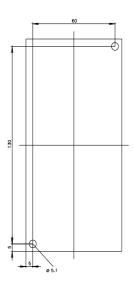

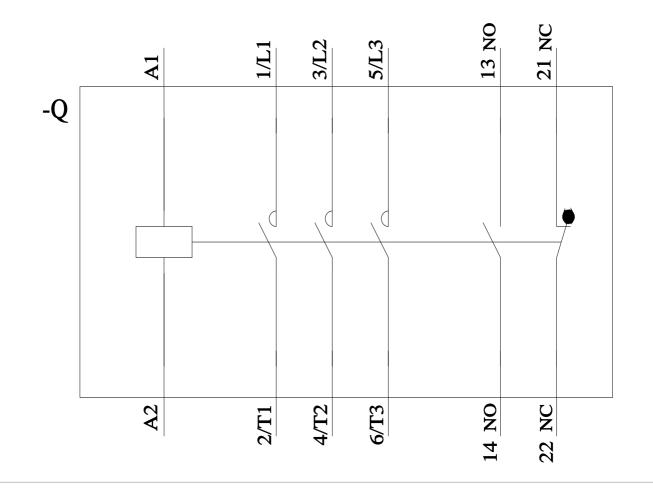

last modified:

8/15/2023 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RT20453AC20